

**Technical Data Sheet for AvK-Alternators**

FM 7.3-5

Date:	02/01/14	Customer:	GENERIC DATASHEET only
Project No.:		AvK Reference:	dsg07411_6_60_690_A048M965

Object data:	
Site:	Prime Mover:
Application: Stationary Power Plant	Manufacturer:

Generator data:					
Generator:	DSG 74 L1/6	Poles:	6	Standards: IEC 60034	
Rated power:	1270 kVA	1016 kWe	1065 kWm		
Power factor:	0.80				
Power at pf 1,0	1030 kVA	1030 kWe	1065 kWm		
Rated voltage:	0.69 kV				
Speed:	1200 1/min				
Frequency:	60 Hz		Voltage range / frequency range:		
Rated current:	1062.7 A		Zone A according IEC 60034-1 (dU = +/-5%, df = +/-2%)		
Winding pitch:	ca. 5/6				
Insulation class:	Stator: Class H	Rotor: Class H	Temperature rise:	H	
Ambient temperature:	40 ° C		Environment:	Standard environment	
Site altitude:	1000 m				
Enclosure:	IP23		Filter:		
Cooling:	IC 01 - Open-circuit ventilation				
Coolant:	Ambient Air	Temperature	40 ° C	Temperature Air inlet	40 ° C
		Coolant:		generator:	
		Cooling air vol.:	1.9 m³/s	Cooling water quantity:	n/a
Moment of inertia (I):	47.8 kgm²	Weight:	3575 Kg	Losses (environment):	49 KW
				Losses (cooling):	n/a

Wires:	4 terminals, starpoint connected in terminal box
Operation mode:	Single mode
Regulators:	
Voltage regulator:	DECS 100

Electrical data: (acc. IEC)					
Efficiencies:	110%	100%	75%	50%	25%
Power factor 0.8	95,16	95,39	95,67	95,55	93,71
Power factor 0.9	95,87	96,07	96,22	95,96	93,97
Power factor 1.0	96,58	96,74	96,76	96,36	94,22

Reactances and time constants											
	unsaturated		saturated			unsaturated		saturated			
X _d	2.08	1.88	p.u.	X _q	0.97	0.95	p.u.	T _{d0'}	2.3388 s	T _{d0''}	0.02422 s
X _{d'}	0.245	0.245	p.u.	X _{q'}	0.97	0.95	p.u.	T _{d'}	0.28 s	T _{q0'}	0.2274 s
X _{d''}	0.127	0.115	p.u.	X _{q''}	0.139	0.139	p.u.	T _{d''}	0.01137 s	T _{q0''}	0.15869 s
X ₂	0.139	0.126	p.u.	X ₀	0.047	0.043	p.u.	T _a	0.02363 s	T _{q'}	0.2274 s
X _{1s}	n.a.	0.069	p.u.							T _{q''}	0.02274 s
Short circuit ratio saturated: 0.53					Z _n 0.375 Ohm						

Short circuit data:		
Initial short circuit current (3-phase):	I _{k''}	9241 A
Max. peak current (3-phase):	I _s	23524 A
Sustained short circuit current:	I _k	3188 A
		Minimum 3 x rated current for max.10 s
Initial short circuit torque:	M _{k2}	114.2 kNm
	M _{k3}	68.5 kNm
Max. faulty synchron moment:	M _f	245.5 kNm
Rated kVA torque:	M _{SN}	10.11 kNm
Rated torque	M _N	8.09 kNm
Shaft torque	M _{Sh}	8.48 kNm

Load application:	
max. load application: 778 kVA (corresponds to 61,23 % from 1270 kVA) for Power factor 0.4 15% transient voltage drop	Power: 1270 kVA Power factor: 0.8 transient voltage drop: -19.7 %

Remarks:

**Technical Data Sheet for AvK-Alternators**

FM 7.3-5

Date:	02/01/14	Customer:	GENERIC DATASHEET only
Project No.:		AvK Reference:	dsg07411_6_60_690_A048M965

Object data:	
Site:	Prime Mover:
Application: Stationary Power Plant	Manufacturer:

Generator data:					
Generator:	DSG 74 L1/6	Poles:	6	Standards: IEC 60034	
Rated power:	1270 kVA	1016 kWe	1065 kWm		
Power factor:	0.80				
Power at pf 1,0	1030 kVA	1030 kWe	1065 kWm		
Rated voltage:	0.69 kV				
Speed:	1200 1/min				
Frequency:	60 Hz		Voltage range / frequency range:		
Rated current:	1062.7 A		Zone A according IEC 60034-1 (dU = +/-5%, df = +/-2%)		
Winding pitch:	ca. 5/6				
Insulation class:	Stator: Class H	Rotor: Class H	Temperature rise:	H	
Ambient temperature:	40 ° C		Environment:	Standard environment	
Site altitude:	1000 m				
Enclosure:	IP23		Filter:		
Cooling:	IC 01 - Open-circuit ventilation				
Coolant:	Ambient Air	Temperature	40 ° C	Temperature Air inlet	40 ° C
		Coolant:		generator:	
		Cooling air vol.:	1.9 m³/s	Cooling water quantity:	n/a
Moment of inertia (I):	47.8 kgm²	Weight:	3575 Kg	Losses (environment):	49 KW
				Losses (cooling):	n/a

Wires:	4 terminals, starpoint connected in terminal box
Operation mode:	Single mode
Regulators:	
Voltage regulator:	DECS 100

Electrical data: (acc. IEC)					
Efficiencies:	110%	100%	75%	50%	25%
Power factor 0.8	95,16	95,39	95,67	95,55	93,71
Power factor 0.9	95,87	96,07	96,22	95,96	93,97
Power factor 1.0	96,58	96,74	96,76	96,36	94,22

Reactances and time constants											
	unsaturated		saturated			unsaturated		saturated			
X _d	2.08	1.88	p.u.	X _q	0.97	0.95	p.u.	T _{d0'}	2.3388 s	T _{d0''}	0.02422 s
X _{d'}	0.245	0.245	p.u.	X _{q'}	0.97	0.95	p.u.	T _{d'}	0.28 s	T _{q0'}	0.2274 s
X _{d''}	0.127	0.115	p.u.	X _{q''}	0.139	0.139	p.u.	T _{d''}	0.01137 s	T _{q0''}	0.15869 s
X ₂	0.139	0.126	p.u.	X ₀	0.047	0.043	p.u.	T _a	0.02363 s	T _{q'}	0.2274 s
X _{1s}	n.a.	0.069	p.u.							T _{q''}	0.02274 s
Short circuit ratio saturated: 0.53					Z _n 0.375 Ohm						


Short circuit data:		
Initial short circuit current (3-phase):	I _{k''}	9241 A
Max. peak current (3-phase):	I _s	23524 A
Sustained short circuit current:	I _k	3188 A
		Minimum 3 x rated current for max.10 s
Initial short circuit torque:	M _{k2}	114.2 kNm
	M _{k3}	68.5 kNm
Max. faulty synchron moment:	M _f	245.5 kNm
Rated kVA torque:	M _{SN}	10.11 kNm
Rated torque	M _N	8.09 kNm
Shaft torque	M _{Sh}	8.48 kNm

Load application:	
max. load application: 778 kVA (corresponds to 61,23 % from 1270 kVA) for Power factor 0.4 15% transient voltage drop	Power: 1270 kVA Power factor: 0.8 transient voltage drop: -19.7 %

Remarks:

Alternator :	DSG 74 L1/6			
Rated output [kVA]	1270	Rated power factor:	0.8	Rated voltage [kV]: 0.69
Rated frequency [Hz]	60	Rated speed [rpm]	1200	


Wirkungsgrad-Kennlinie - Efficiency Curve

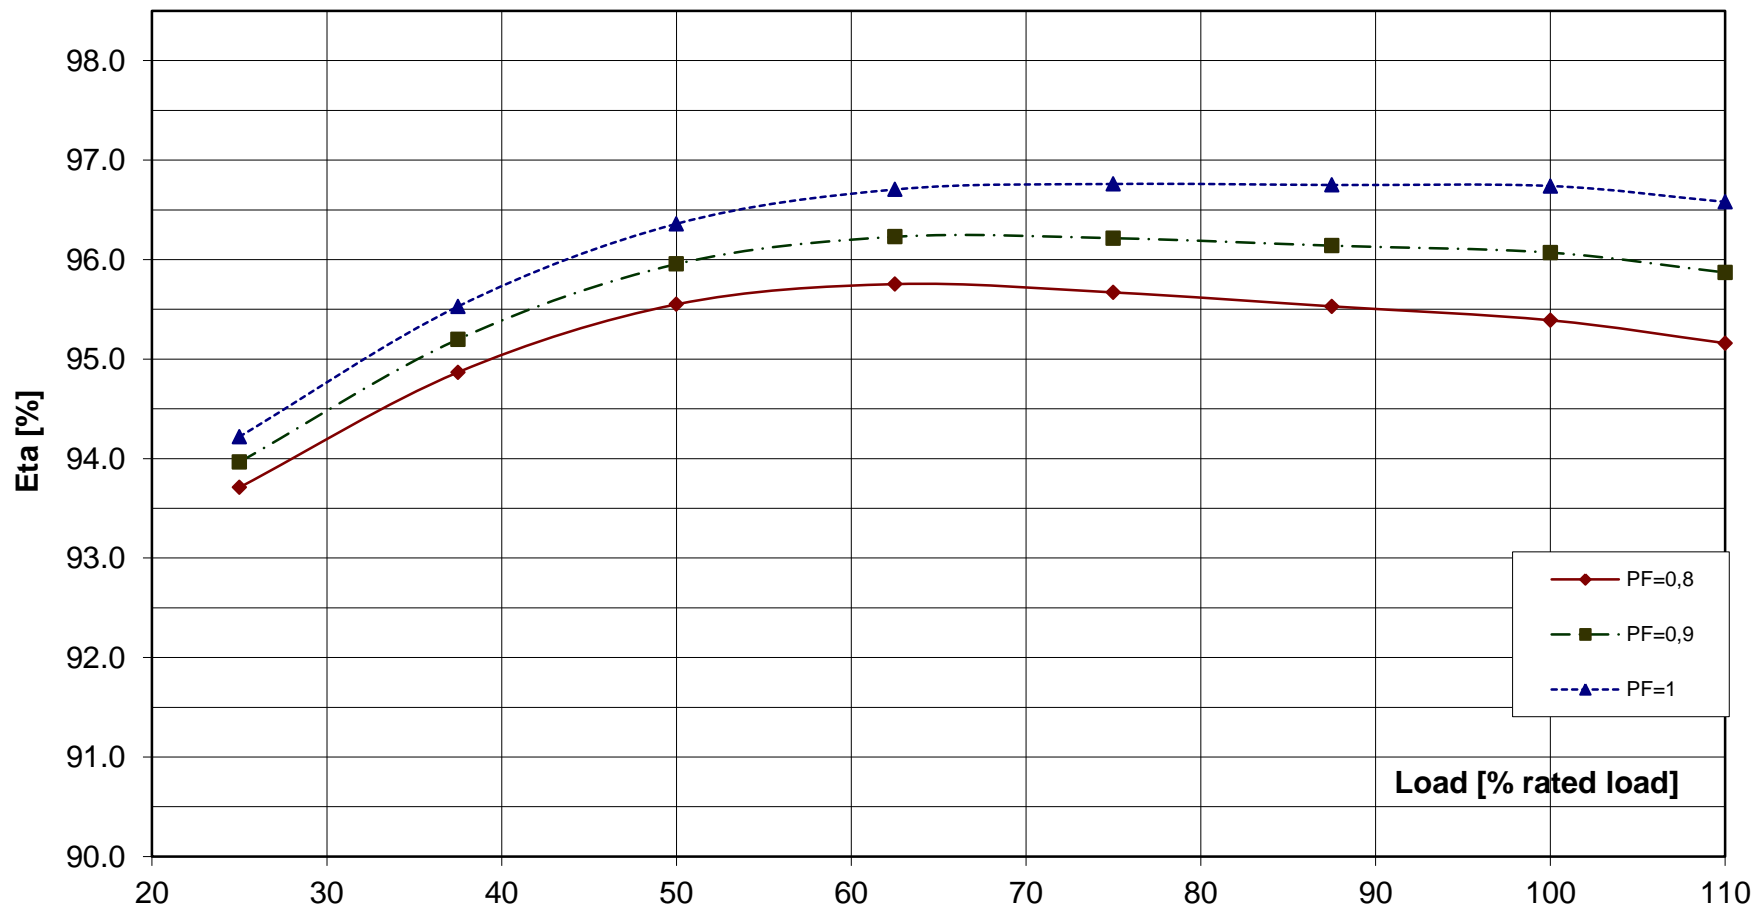

Alternator : DSG 74 L1/6

Rated output [kVA]	1270	Rated power factor:	0.8	Rated voltage [kV]:	0.69
Rated frequency [Hz]	60	Rated speed [rpm]	1200		

Transient Voltage rise or drop for sudden load removal or application

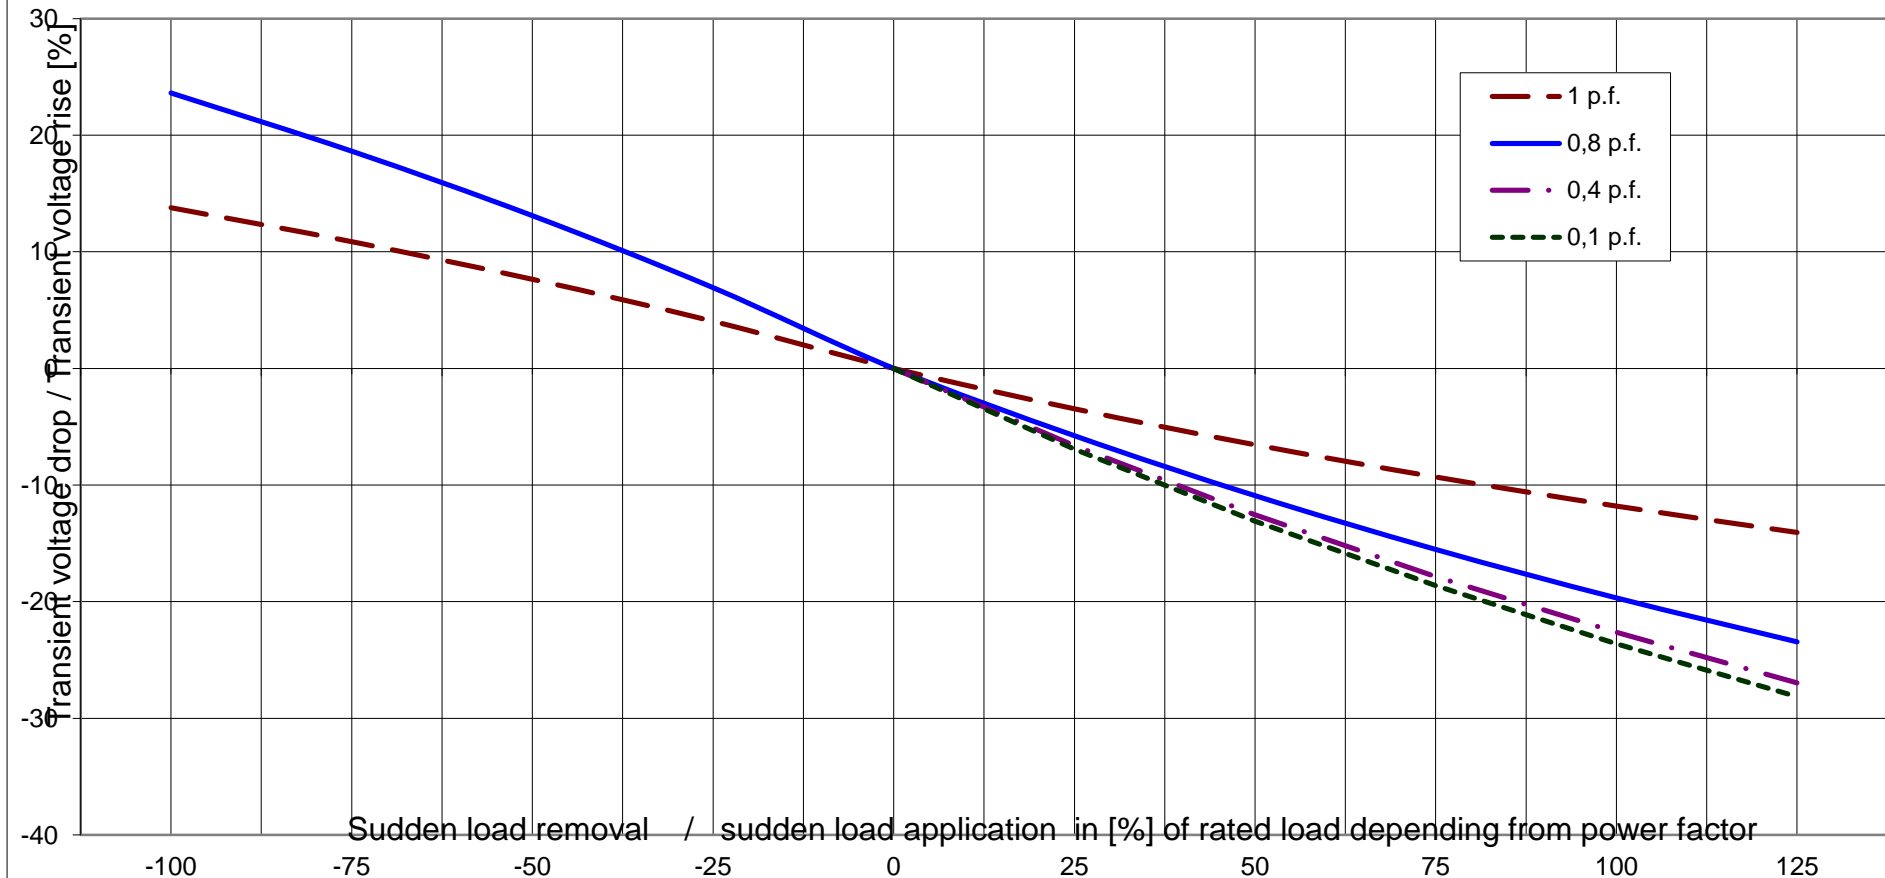




Technisches Datenblatt - Diagramme
Technical data sheet - Diagrams

ING-FCD-0112

Alternator :	DSG 74 L1/6			
Rated output [kVA]	1270	Rated power factor:	0.8	Rated voltage [kV]: 0.69
Rated frequency [Hz]	60	Rated speed [rpm]	1200	MSN related to kVA: 10.11 KNm

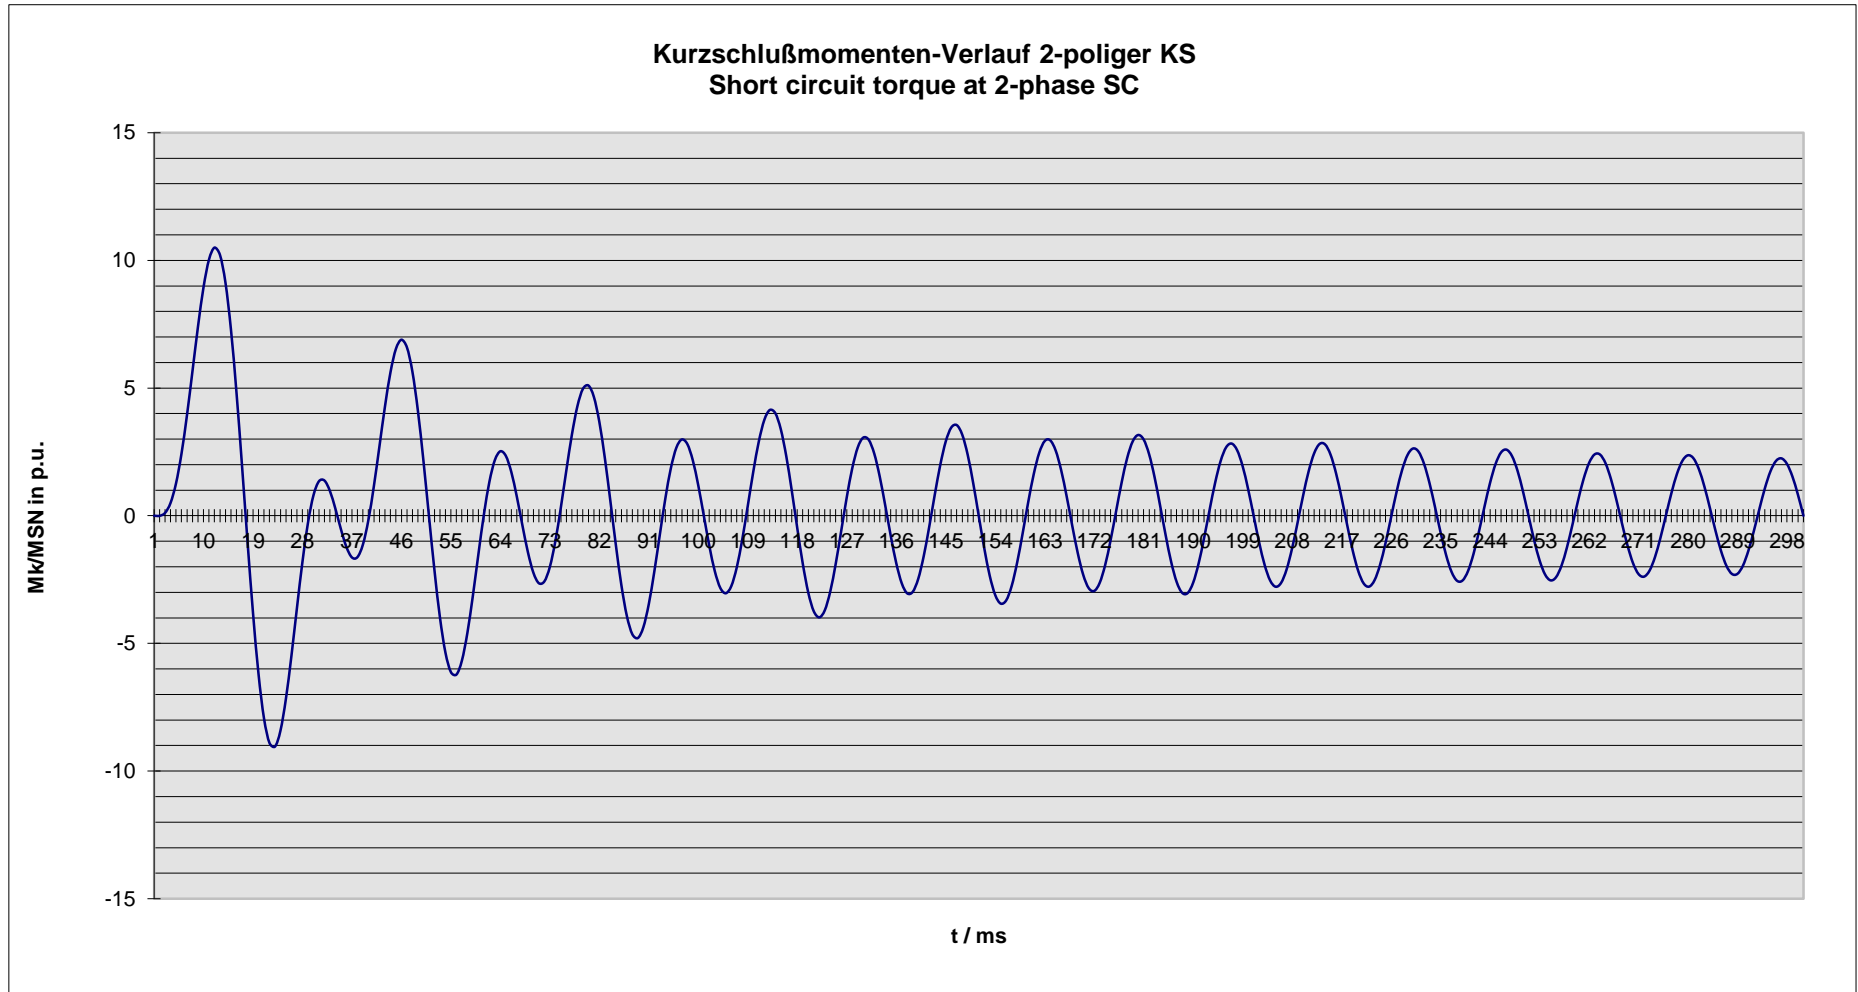

Nenndaten / nominal data

DSG 74 L1/6

Leistung S_N : **1270 kVA**

$\cos \varphi$: **0.80**

Rating

p.f.

Spannung U_N : **0.69 kV**

Strom I_N : **1063 A**

Voltage

Current

Frequenz f : **60 Hz**

Drehzahl n : **1,200 min⁻¹**

Frequency


Speed

Schutzart **IP23**

Protection

Kurzschlussstrom $I_{k3\text{phasig}} / I_N$ [p.u.]
 Short-circuit current $I_{k3\text{phase}} / I_N$ [p.u.]

Stosskurzschluss-Strom, 3-phasig, asymmetrisch /
Sudden short circuit current, 3-phase, asymmetrical

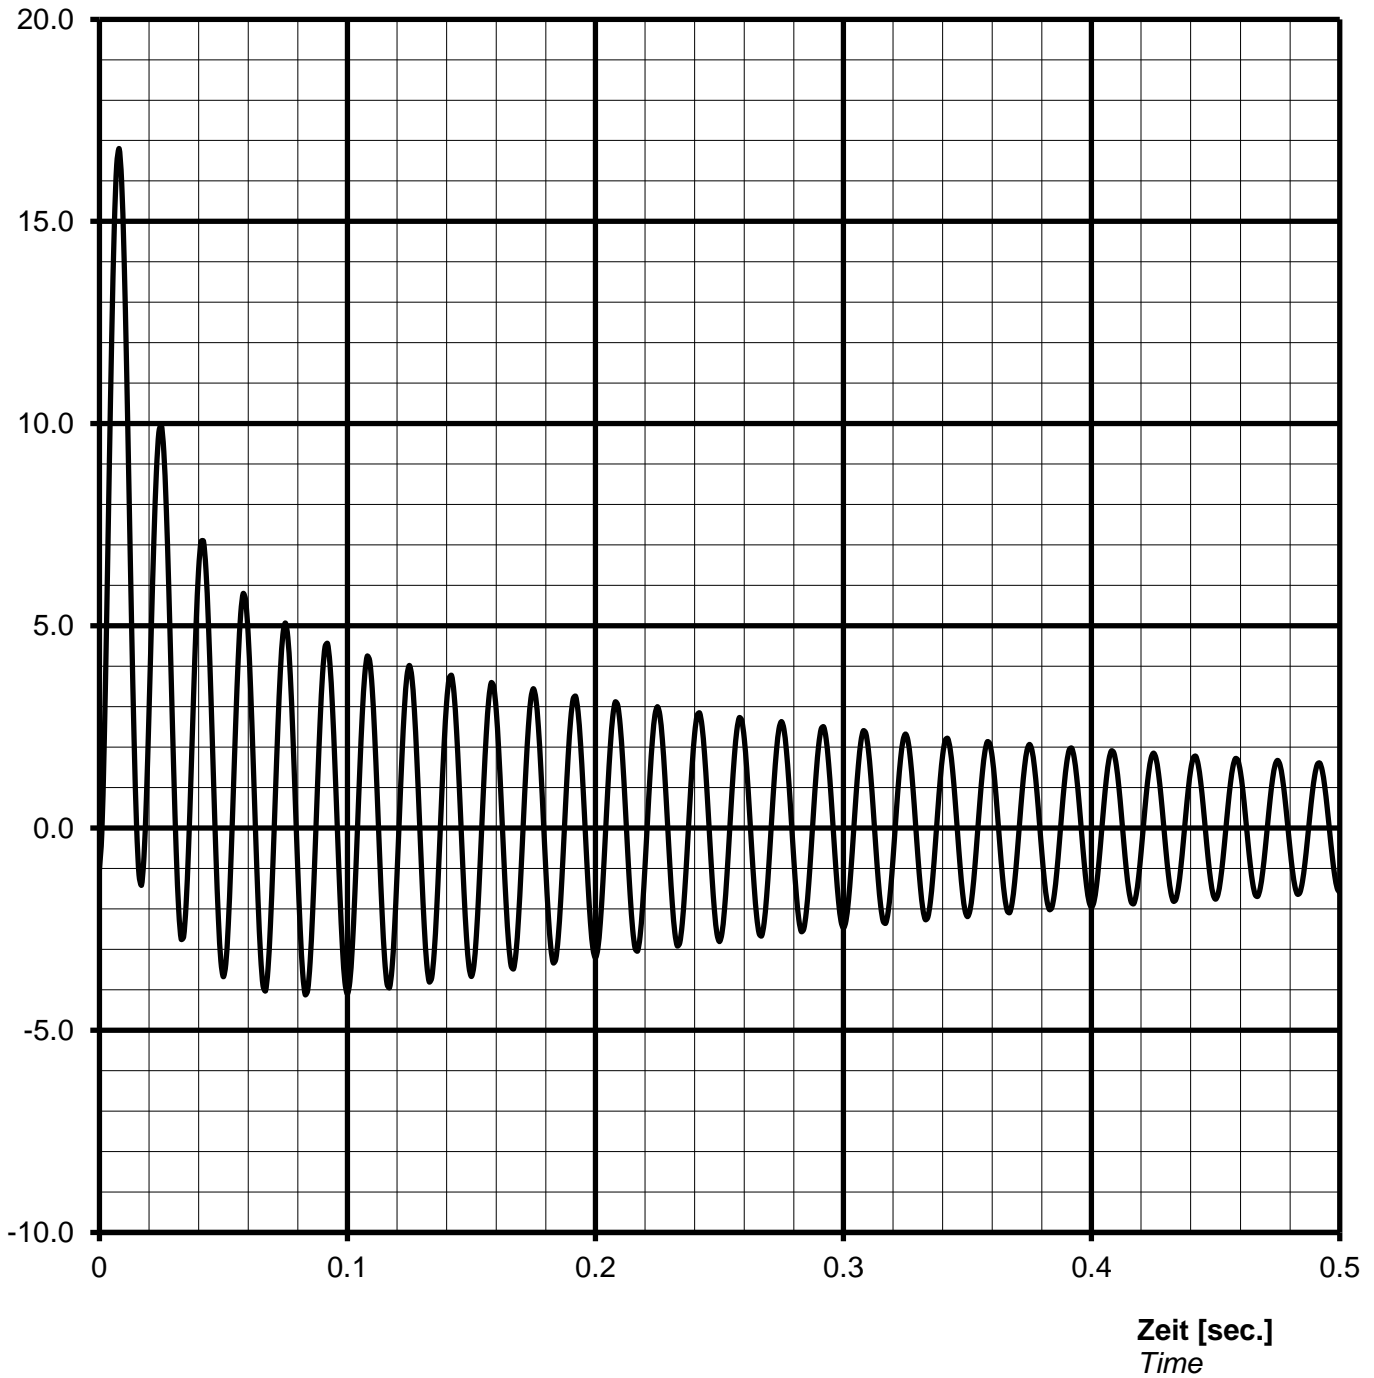

Notizen / remarks:

Maximum asymmetric peak value $I_{\text{speak}} = 17851 \text{ A}$ or 16.80 p.u.

Nenn Daten / nominal data

DSG 74 L1/6

Leistung S_N : **1270 kVA**

$\cos \varphi$: **0.80**

Rating

p.f.

Spannung U_N : **0.69 kV**

Strom I_N : **1063 A**

Voltage

Current

Frequenz f: **60 Hz**

Drehzahl n: **1200 min⁻¹**


Frequency

Speed

Schutzart **IP23**

Protection

Überlast Kennlinie Overload capability

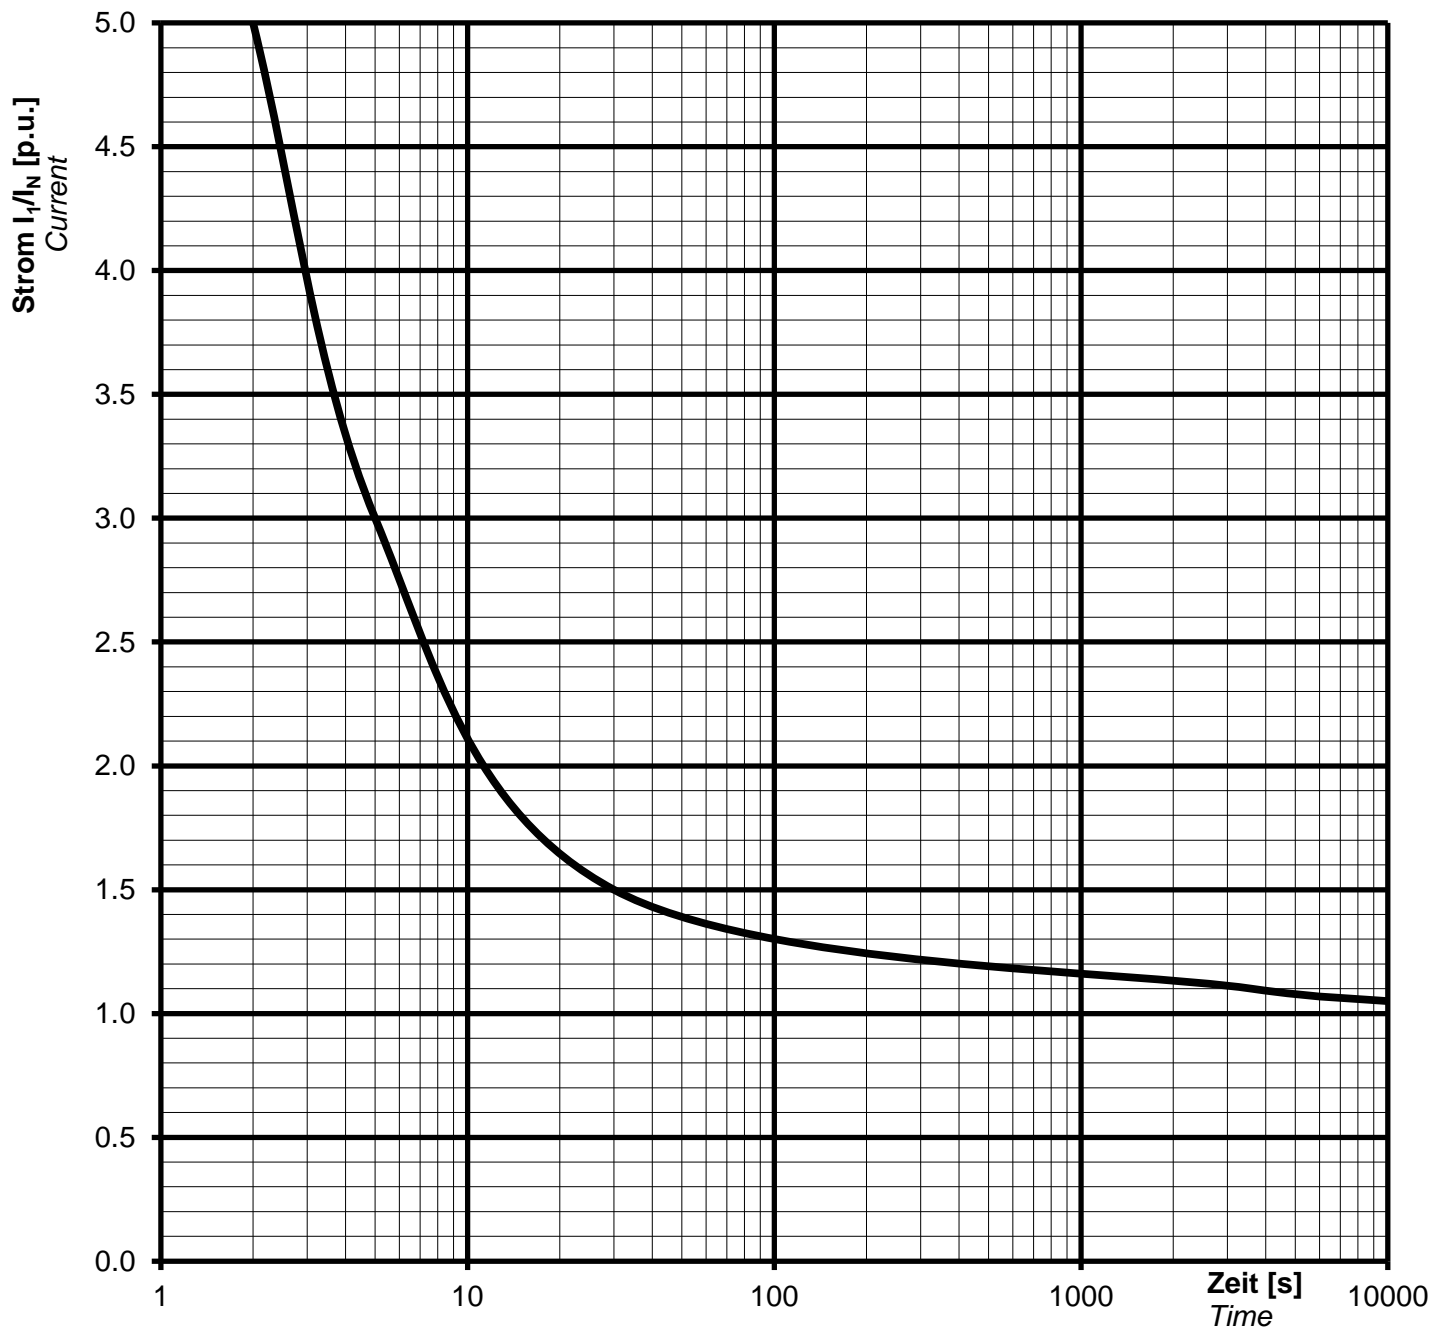

Notizen / remarks:

Strom / Zeit Kriterien:

$$(I / I_N)^2 \cdot t = 45s$$

Current/time characteristics:

$$1,5 \cdot I_N \text{ for } 30 \text{ s}$$

$$1,1 \cdot I_N \text{ for } 1 \text{ h in } 6 \text{ h}$$

Nenndaten / nominal data

DSG 74 L1/6

Rating S_N : **1270 kVA**

p.f. **0.80**

Bemessungsleistung

Leistungsfaktor $\cos \varphi$:

Nominal voltage U_N : **0.69 kV**

Nominal current I_N : **1063 A**

Bemessungsspannung

Bemessungsstrom

Frequency f_N : **60 Hz**

Speed n : **1200 min⁻¹**


Frequenz

Drehzahl

Protection: **IP23**

Schutzart

Inverse current or unbalanced negative sequence current

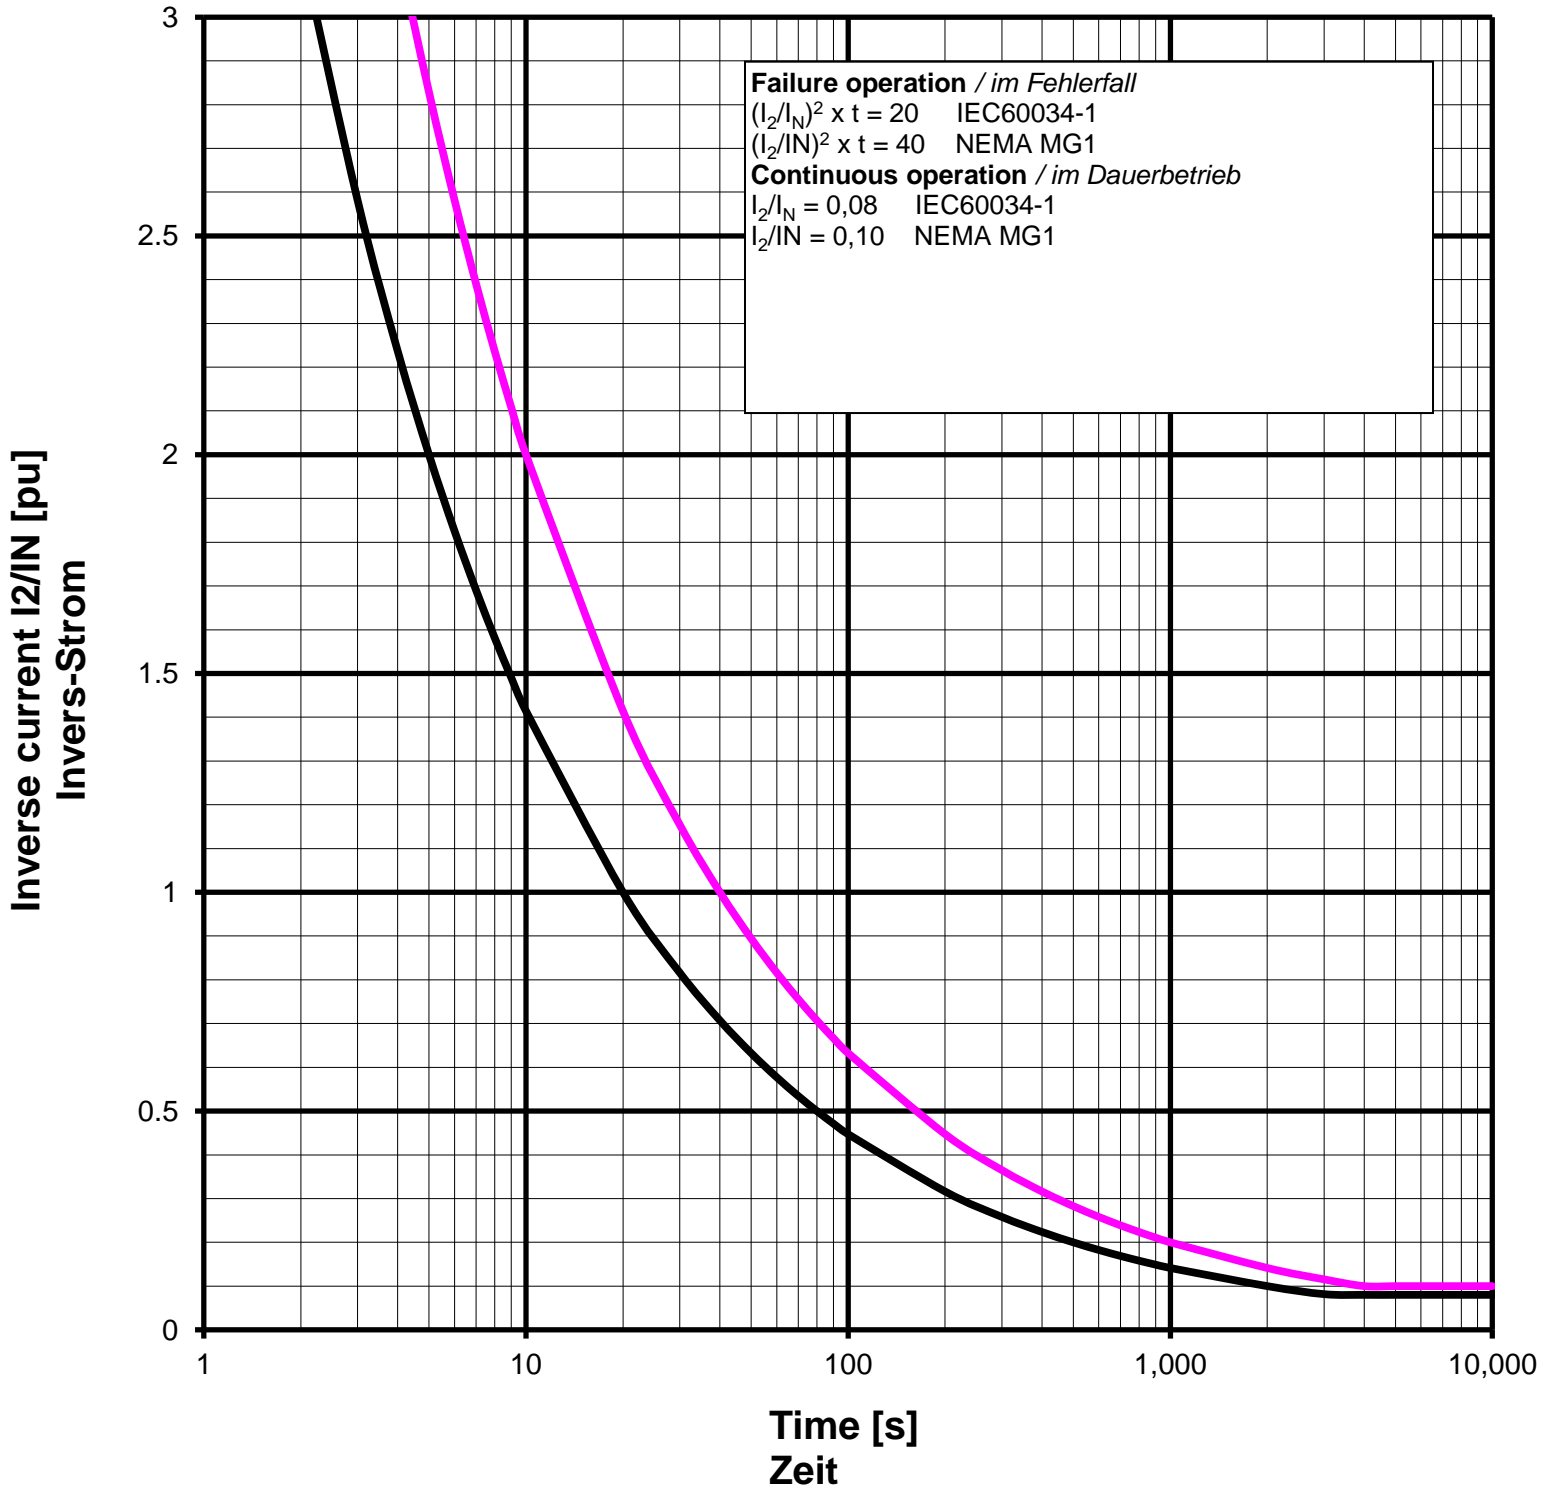

Remarks / Notizen:




TYPE

DSG 74 L1/6


Projekt:

Order Nr.:

Capability (P-Q) Diagram

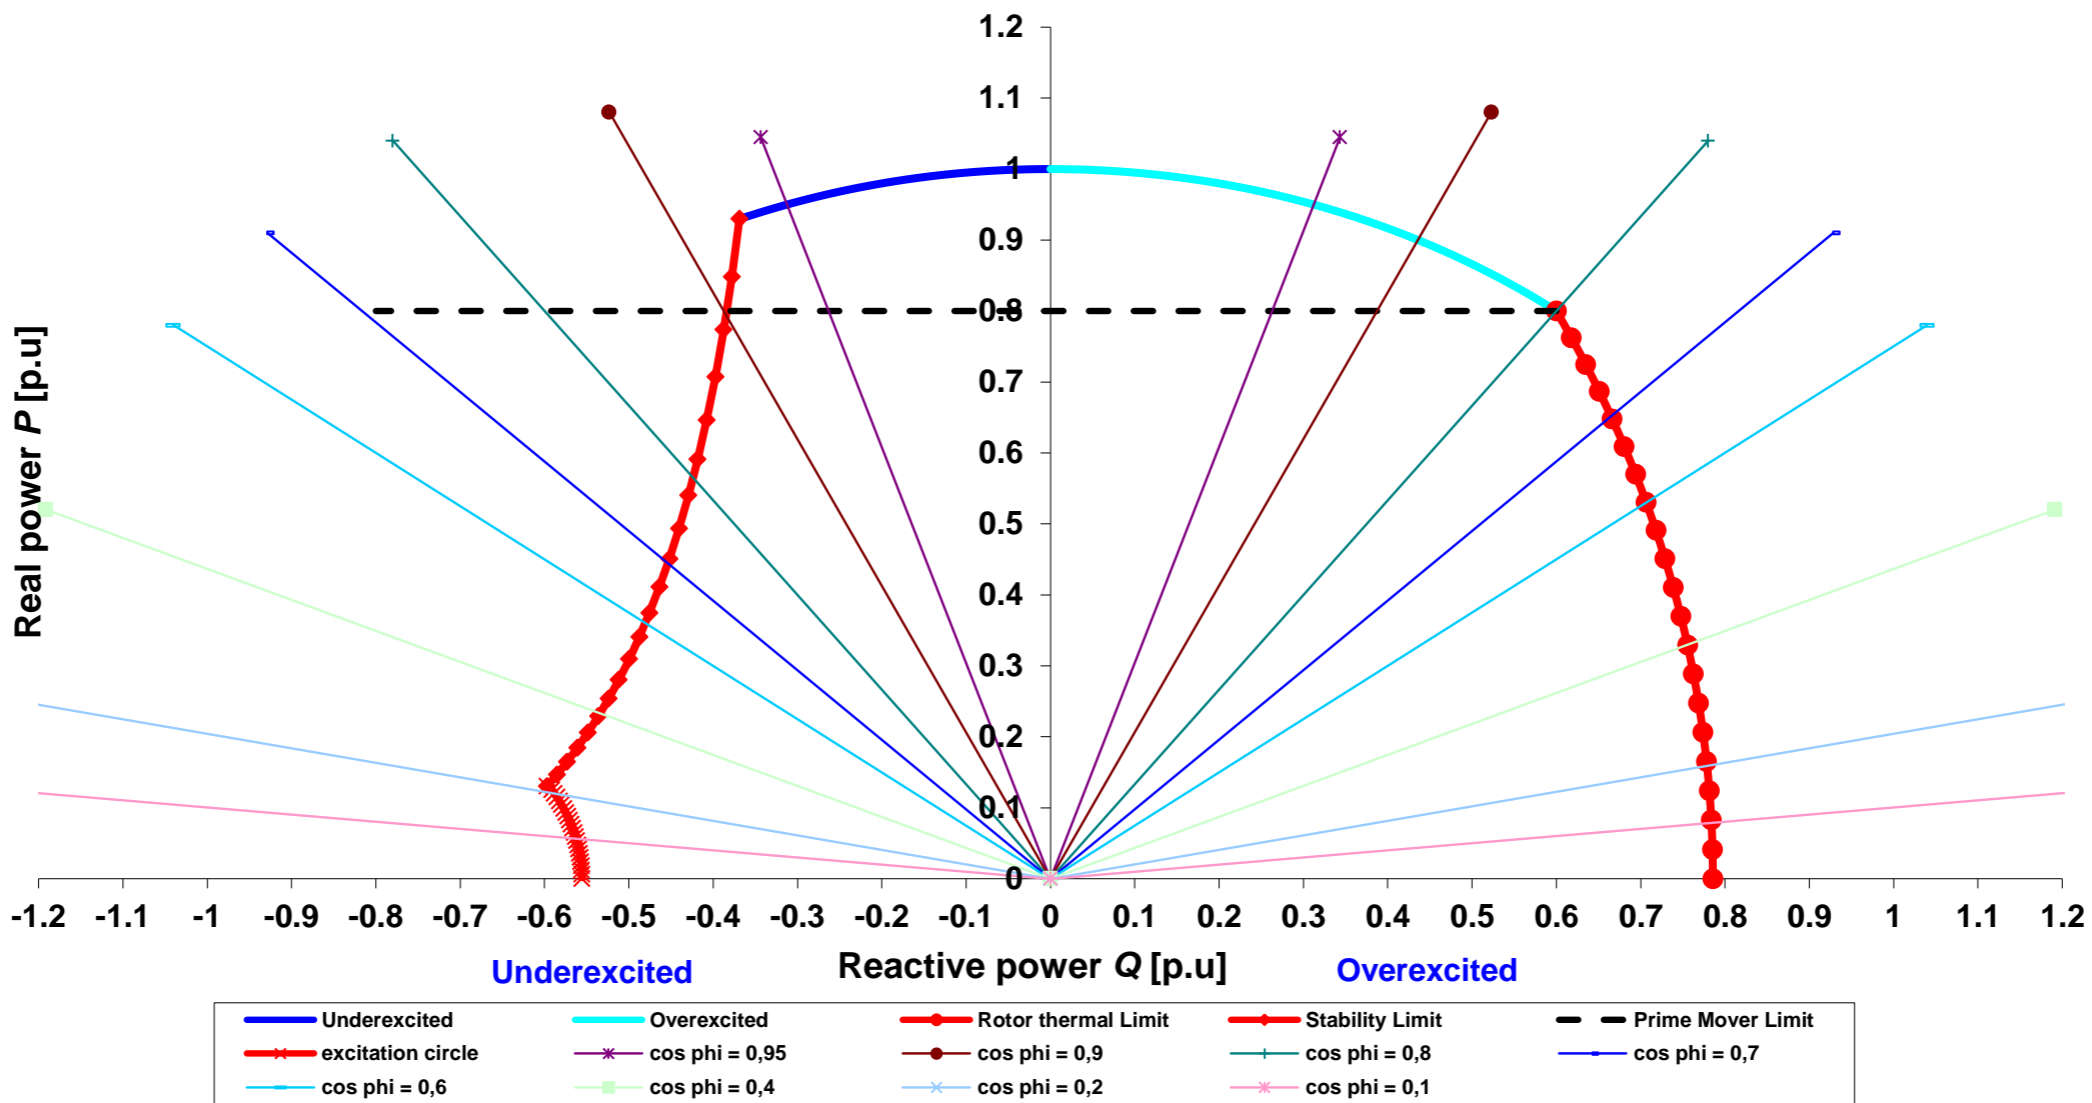

TYPE	DSG 74 L1/6	Projekt:		Order Nr.:	
------	-------------	----------	--	------------	--

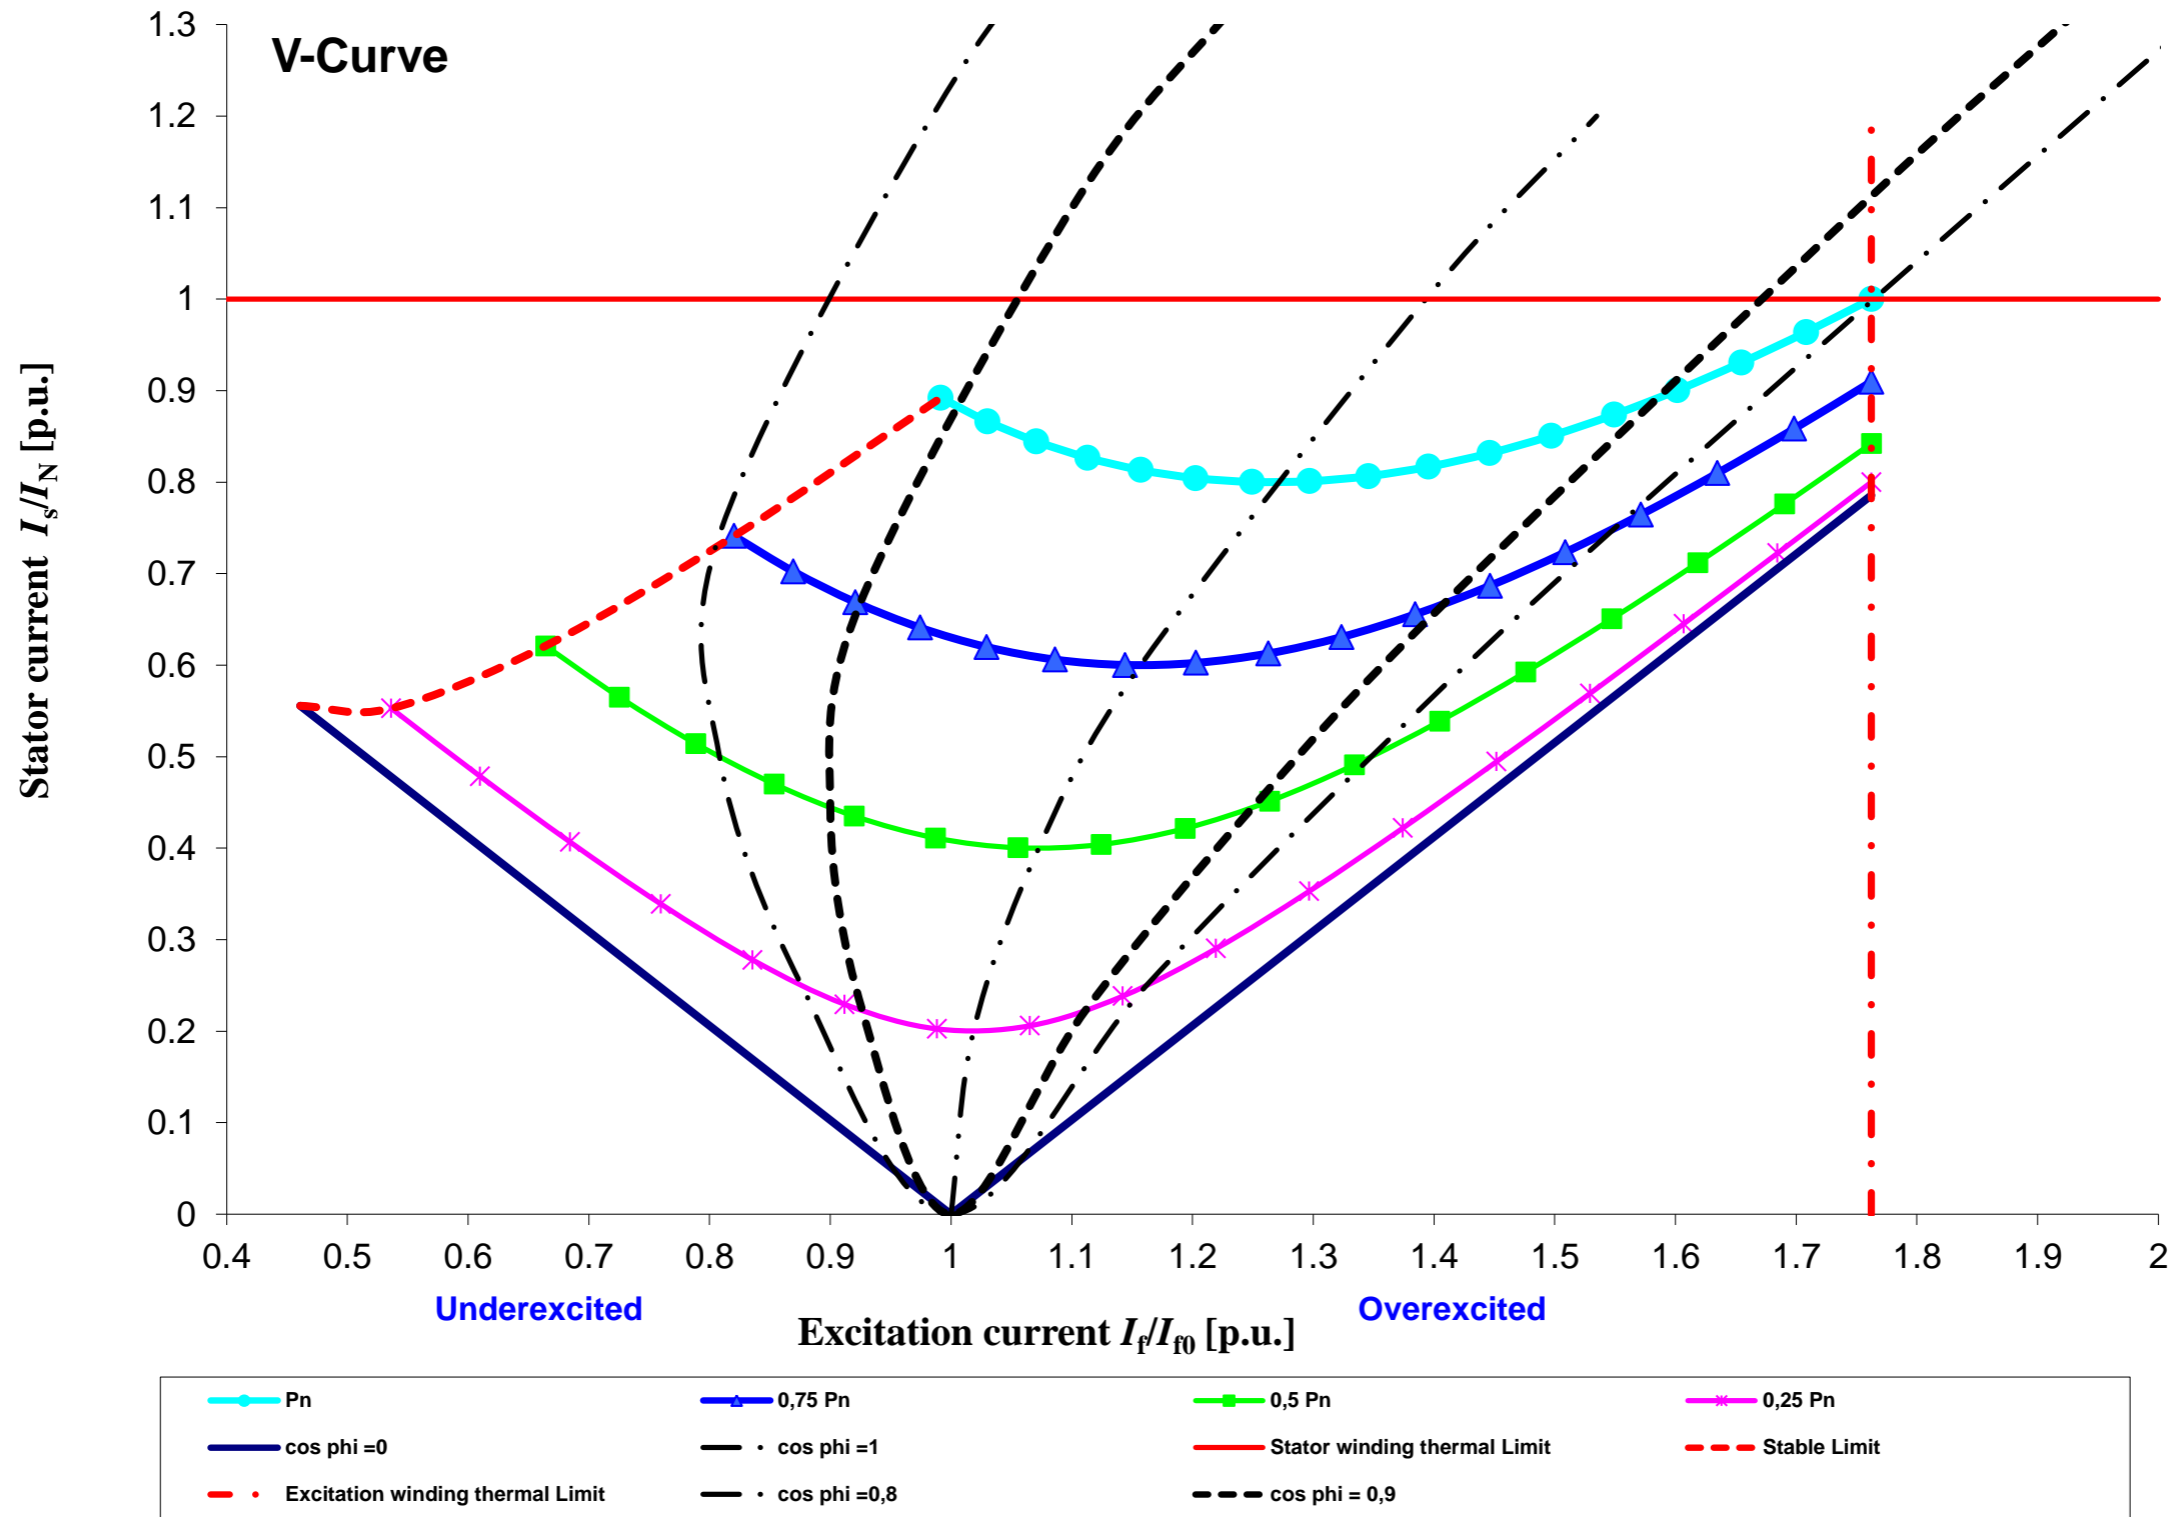

Cummins Generator Technologies	Datum / date:	
	03/01/2014	

**Technical Data Sheet for AvK-Alternators**

FM 7.3-5

Date:	02/01/14	Customer:	GENERIC DATASHEET only
Project No.:		AvK Reference:	dsg07411_6_60_690_A048M965

Object data:

Site:		Prime Mover:	
Application:	Stationary Power Plant	Manufacturer:	

Generator data:

Generator:	DSG 74 L1/6	Poles:	6	Standards:	IEC 60034
Rated power:	1270 kVA	1016 kWe	1065 kWm		
Power factor:	0.80				
Power at pf 1,0	1030 kVA	1030 kWe	1065 kWm		
Rated voltage:	0.69 kV				
Speed:	1200 1/min				
Frequency:	60 Hz			Voltage range / frequency range:	
Rated current:	1062.7 A			Zone A according IEC 60034-1 (dU = +/-5%, df = +/-2%)	

Winding pitch:	ca. 5/6
----------------	---------

Insulation class:	Stator: Class H	Rotor: Class H	Temperature rise:	H
-------------------	-----------------	----------------	-------------------	---

Ambient temperature:	40 ° C	Environment:	Standard environment
----------------------	--------	--------------	----------------------

Site altitude:	1000 m		
----------------	--------	--	--

Enclosure:	IP23	Filter:	
------------	------	---------	--

Cooling:	IC 01 - Open-circuit ventilation
----------	----------------------------------

Coolant:	Ambient Air	Temperature	40 ° C	Temperature Air inlet	40 ° C
----------	-------------	-------------	--------	-----------------------	--------

		Coolant:		generator:	
--	--	----------	--	------------	--

		Cooling air vol.:	1.9 m³/s	Cooling water quantity:	n/a
--	--	-------------------	----------	-------------------------	-----

Moment of inertia (I):	47.8 kgm²	Weight:	3575 Kg	Losses (environment):	49 KW
------------------------	-----------	---------	---------	-----------------------	-------

		Losses (cooling):	n/a		
--	--	-------------------	-----	--	--

Wires:	4 terminals, starpoint connected in terminal box
--------	--

Operation mode:	Single mode
-----------------	-------------

Regulators:	
-------------	--

Voltage regulator:	DECS 100
--------------------	----------

Electrical data: (acc. IEC)

Efficiencies:	110%	100%	75%	50%	25%
Power factor 0.8	95,16	95,39	95,67	95,55	93,71
Power factor 0.9	95,87	96,07	96,22	95,96	93,97
Power factor 1.0	96,58	96,74	96,76	96,36	94,22

Reactances and time constants

	unsaturated	saturated		unsaturated	saturated					
X_d	2.08	1.88 p.u.	X_q	0.97	0.95 p.u.	$T_{d0'}$	2.3388 s	$T_{d0''}$	0.02422 s	
X_d'	0.245	0.245 p.u.	X_q'	0.97	0.95 p.u.	$T_{d'}$	0.28 s	$T_{q0'}$	0.2274 s	
X_d''	0.127	0.115 p.u.	X_q''	0.139	0.139 p.u.	$T_{d''}$	0.01137 s	$T_{q0''}$	0.15869 s	
X_2	0.139	0.126 p.u.	X_0	0.047	0.043 p.u.	T_a	0.02363 s	$T_{q'}$	0.2274 s	
X_{1s}	n.a.	0.069 p.u.						$T_{q''}$	0.02274 s	

Short circuit ratio saturated:	0.53	Z_n	0.375 Ohm
--------------------------------	------	-------	-----------

Short circuit data:

Initial short circuit current (3-phase):	I_k''	9241 A	
Max. peak current (3-phase):	I_s	23524 A	
Sustained short circuit current:	I_k	3188 A	Minimum 3 x rated current for max.10 s

Initial short circuit torque:	M_{k2}	114.2 kNm
	M_{k3}	68.5 kNm

Max. faulty synchron moment:	M_f	245.5 kNm
------------------------------	-------	-----------

Rated kVA torque:	M_{SN}	10.11 kNm
-------------------	----------	-----------

Rated torque	M_N	8.09 kNm
--------------	-------	----------

Shaft torque	M_{Sh}	8.48 kNm
--------------	----------	----------


Load application:

max. load application: 778 kVA (corresponds to 61,23 % from 1270 kVA) for Power factor 0.4 15% transient voltage drop	Power: 1270 kVA Power factor: 0.8 transient voltage drop: -19.7 %
--	---

Remarks:

Alternator :	DSG 74 L1/6		
Rated output [kVA]	1270	Rated power factor:	0.8
Rated frequency [Hz]	60	Rated speed [rpm]	1200
			Rated voltage [kV]: 0.69


Wirkungsgrad-Kennlinie - Efficiency Curve

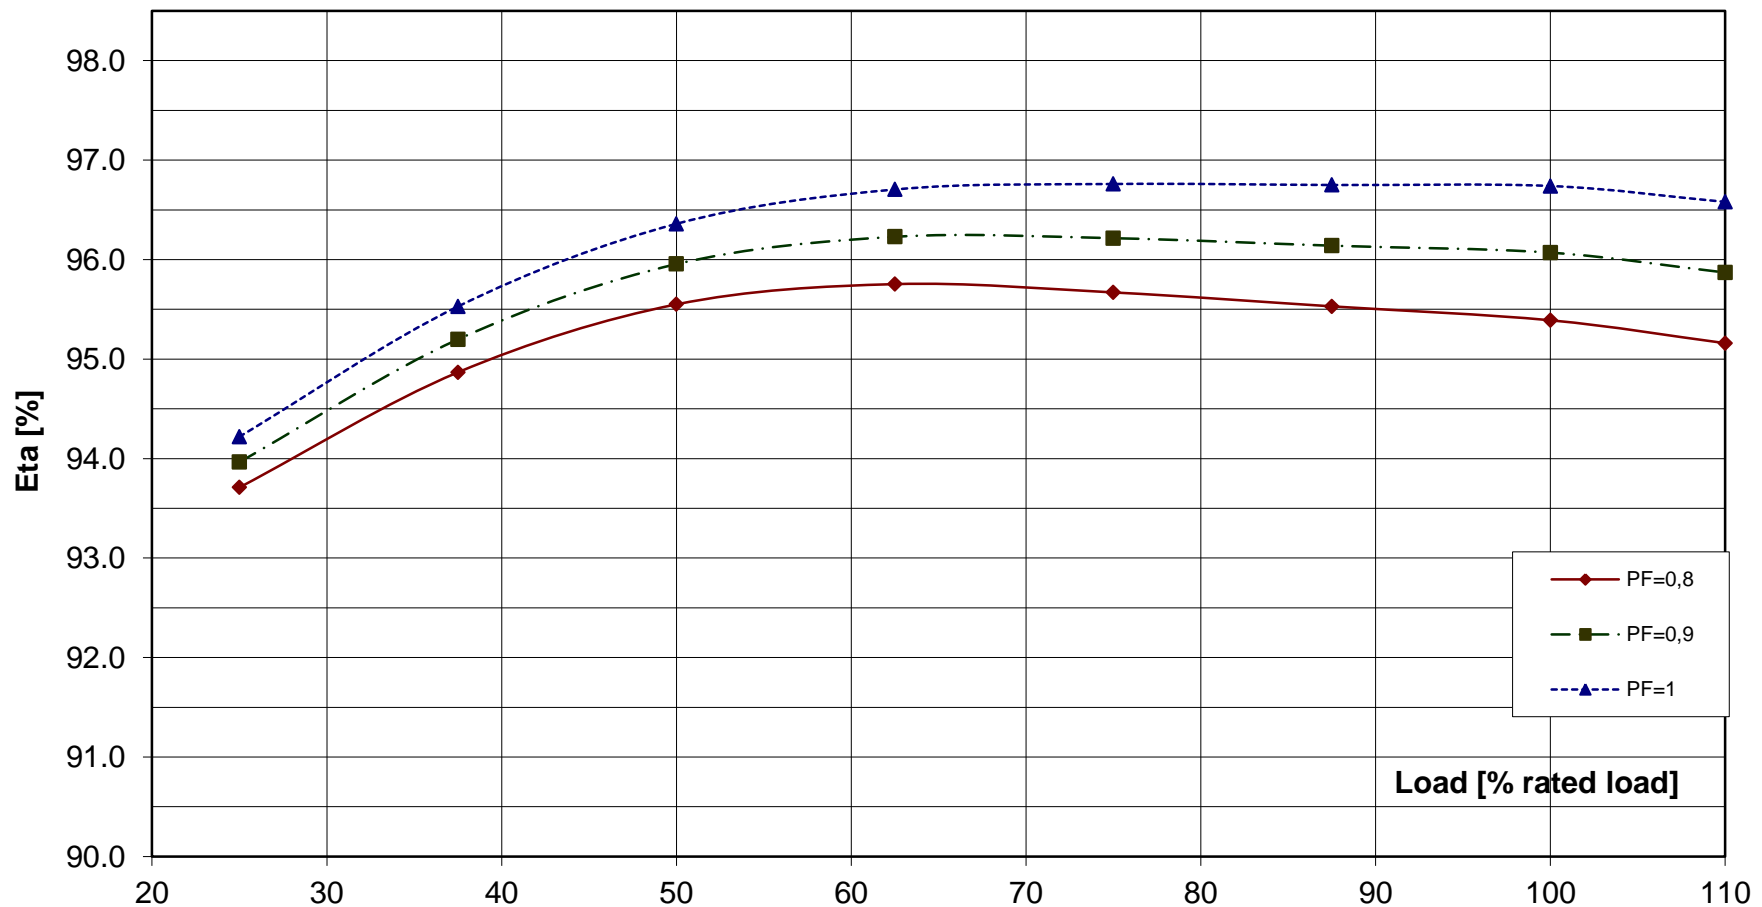

Alternator : DSG 74 L1/6

Rated output [kVA]	1270	Rated power factor:	0.8	Rated voltage [kV]:	0.69
Rated frequency [Hz]	60	Rated speed [rpm]	1200		

Transient Voltage rise or drop for sudden load removal or application

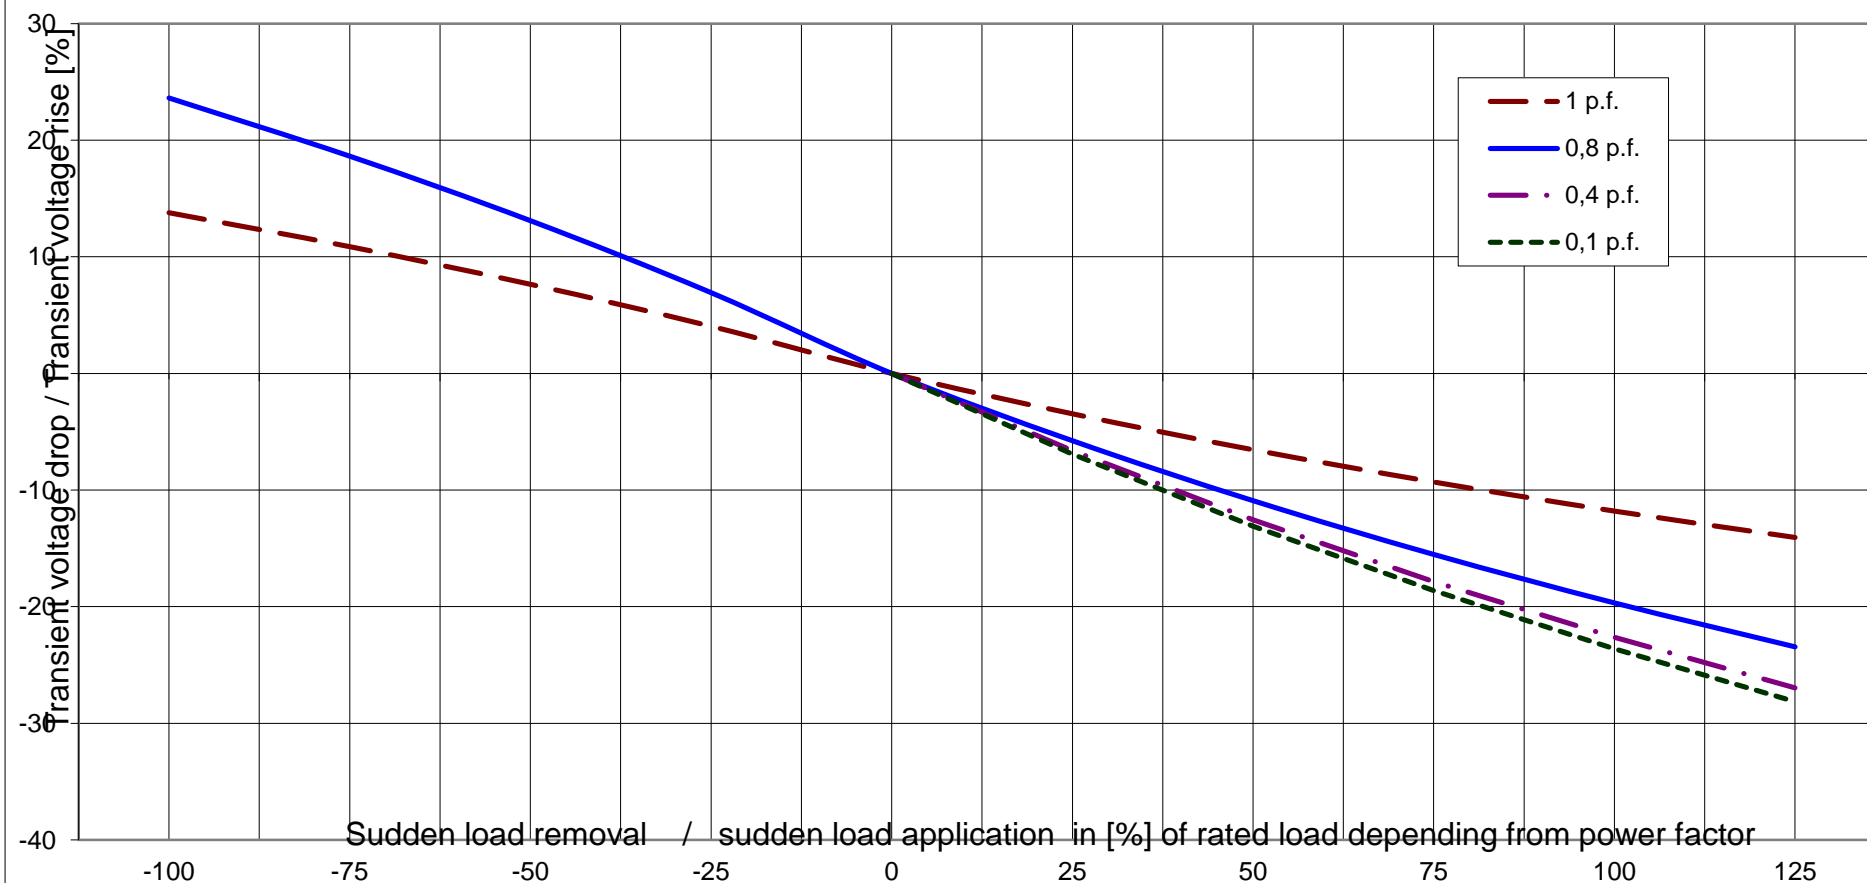




Technisches Datenblatt - Diagramme
Technical data sheet - Diagrams

ING-FCD-0112

Alternator :	DSG 74 L1/6			
Rated output [kVA]	1270	Rated power factor:	0.8	Rated voltage [kV]: 0.69
Rated frequency [Hz]	60	Rated speed [rpm]	1200	MSN related to kVA: 10.11 KNm

Kurzschlußmomenten-Verlauf 2-poliger KS
Short circuit torque at 2-phase SC

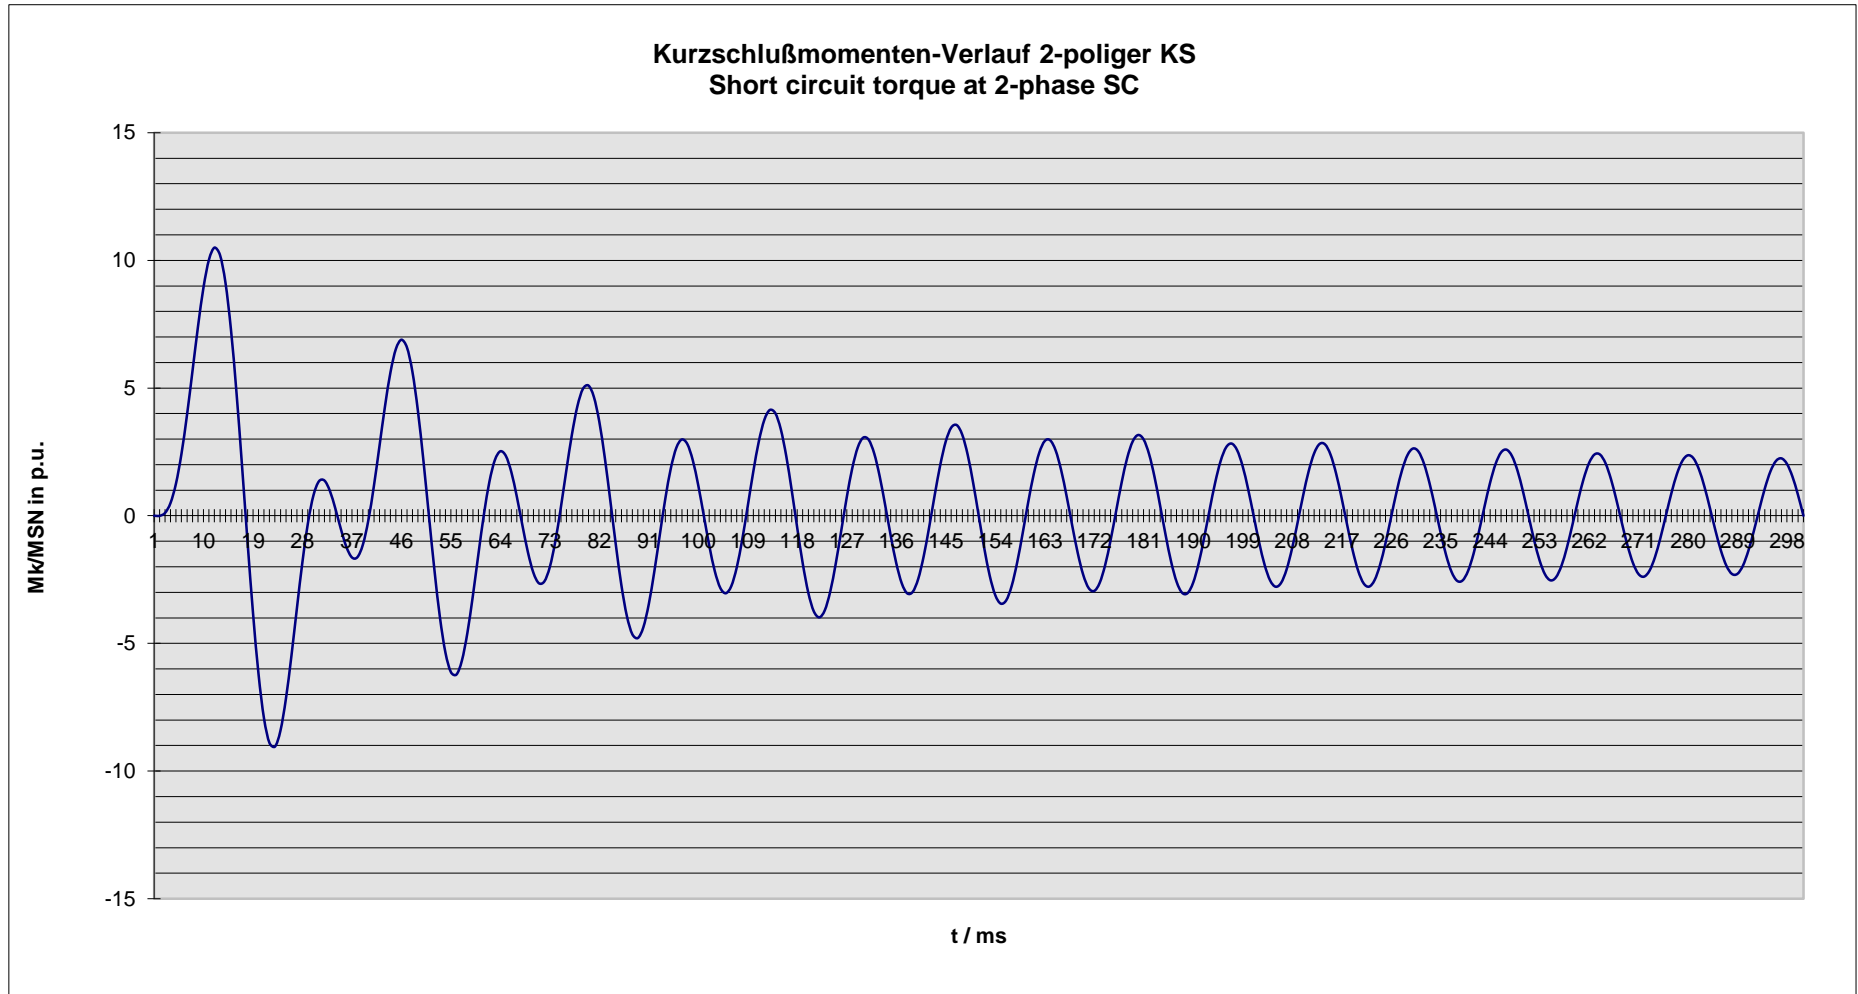

Nenndaten / nominal data

DSG 74 L1/6

Leistung S_N : **1270 kVA**

$\cos \varphi$: **0.80**

Rating

p.f.

Spannung U_N : **0.69 kV**

Strom I_N : **1063 A**

Voltage

Current

Frequenz f : **60 Hz**

Drehzahl n : **1,200 min⁻¹**

Frequency


Speed

Schutzart **IP23**

Protection

Kurzschlussstrom $I_{k3\text{phasig}} / I_N$ [p.u.]
 Short-circuit current $I_{k3\text{phase}} / I_N$ [p.u.]

Stosskurzschluss-Strom, 3-phasig, asymmetrisch /
Sudden short circuit current, 3-phase, asymmetrical

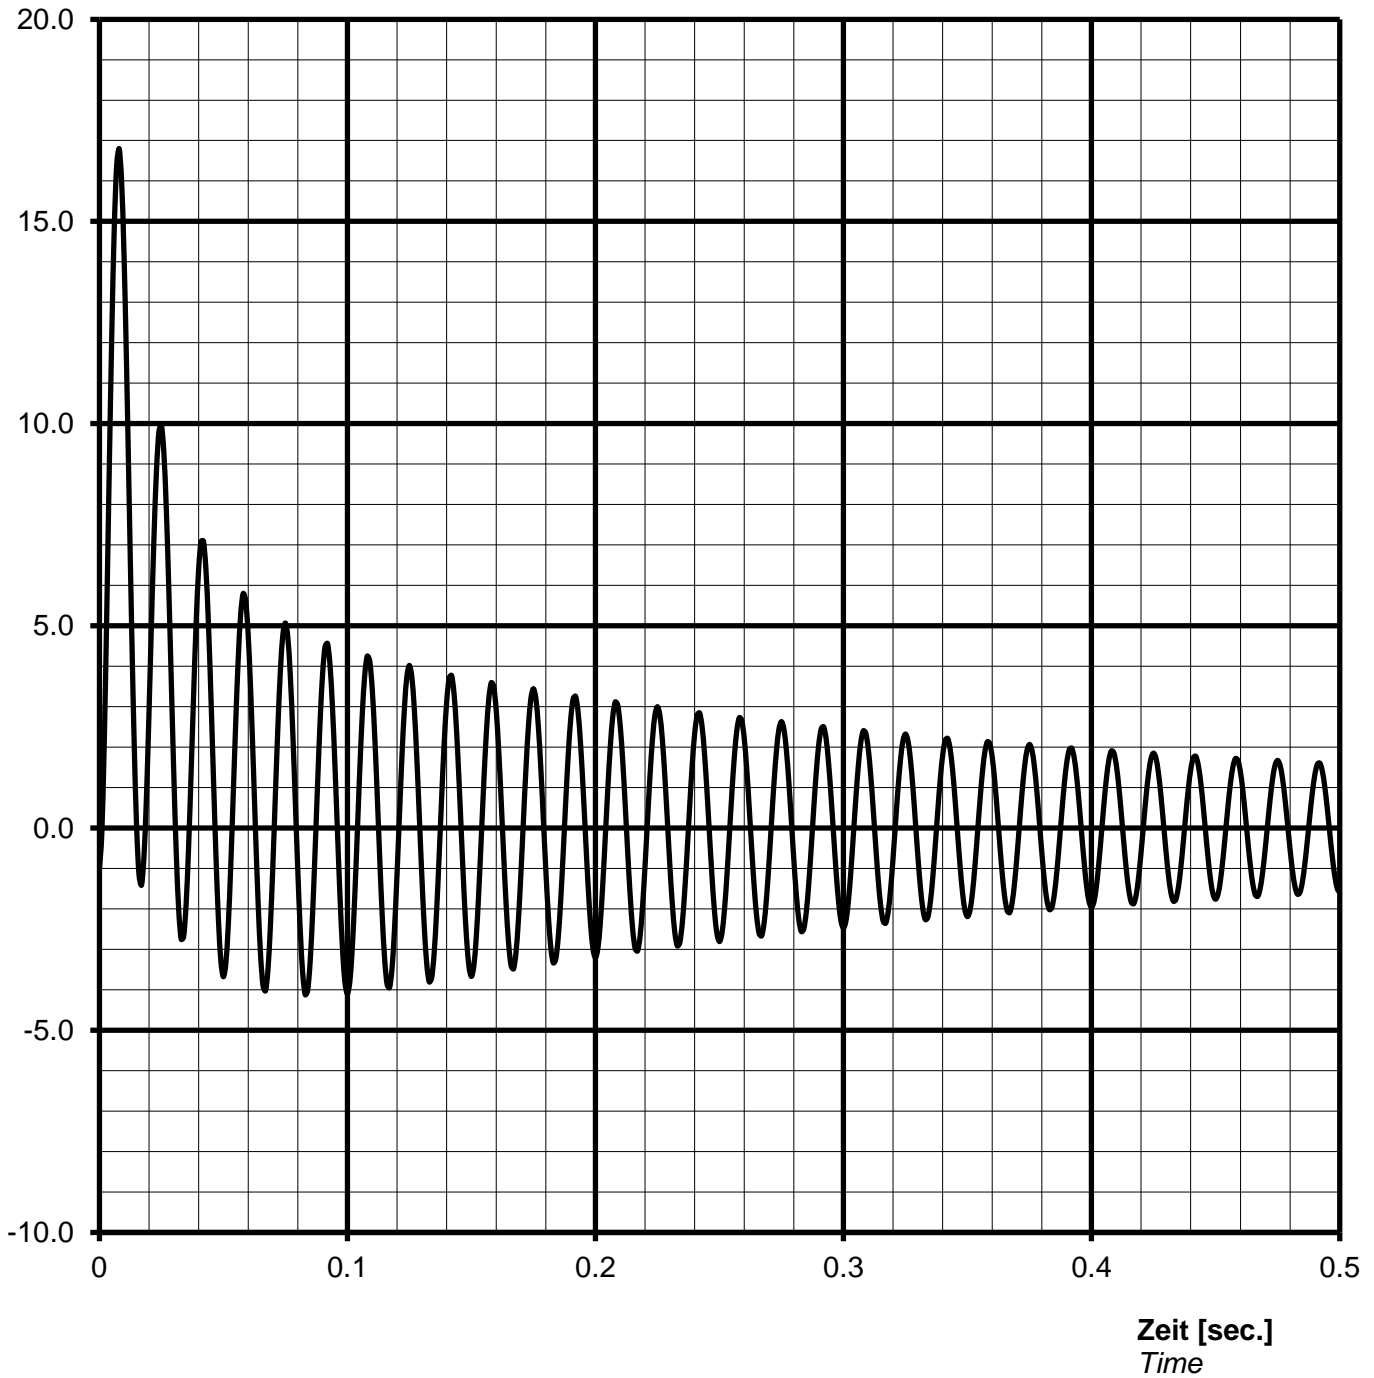

Notizen / remarks:

Maximum asymmetric peak value $I_{\text{speak}} =$ **17851 A** or **16.80 p.u.**

Nenn Daten / nominal data

DSG 74 L1/6

Leistung S_N : **1270 kVA**

$\cos \varphi$: **0.80**

Rating

p.f.

Spannung U_N : **0.69 kV**

Strom I_N : **1063 A**

Voltage

Current

Frequenz f: **60 Hz**

Drehzahl n: **1200 min⁻¹**


Frequency

Speed

Schutzart **IP23**

Protection

Überlast Kennlinie
 Overload capability

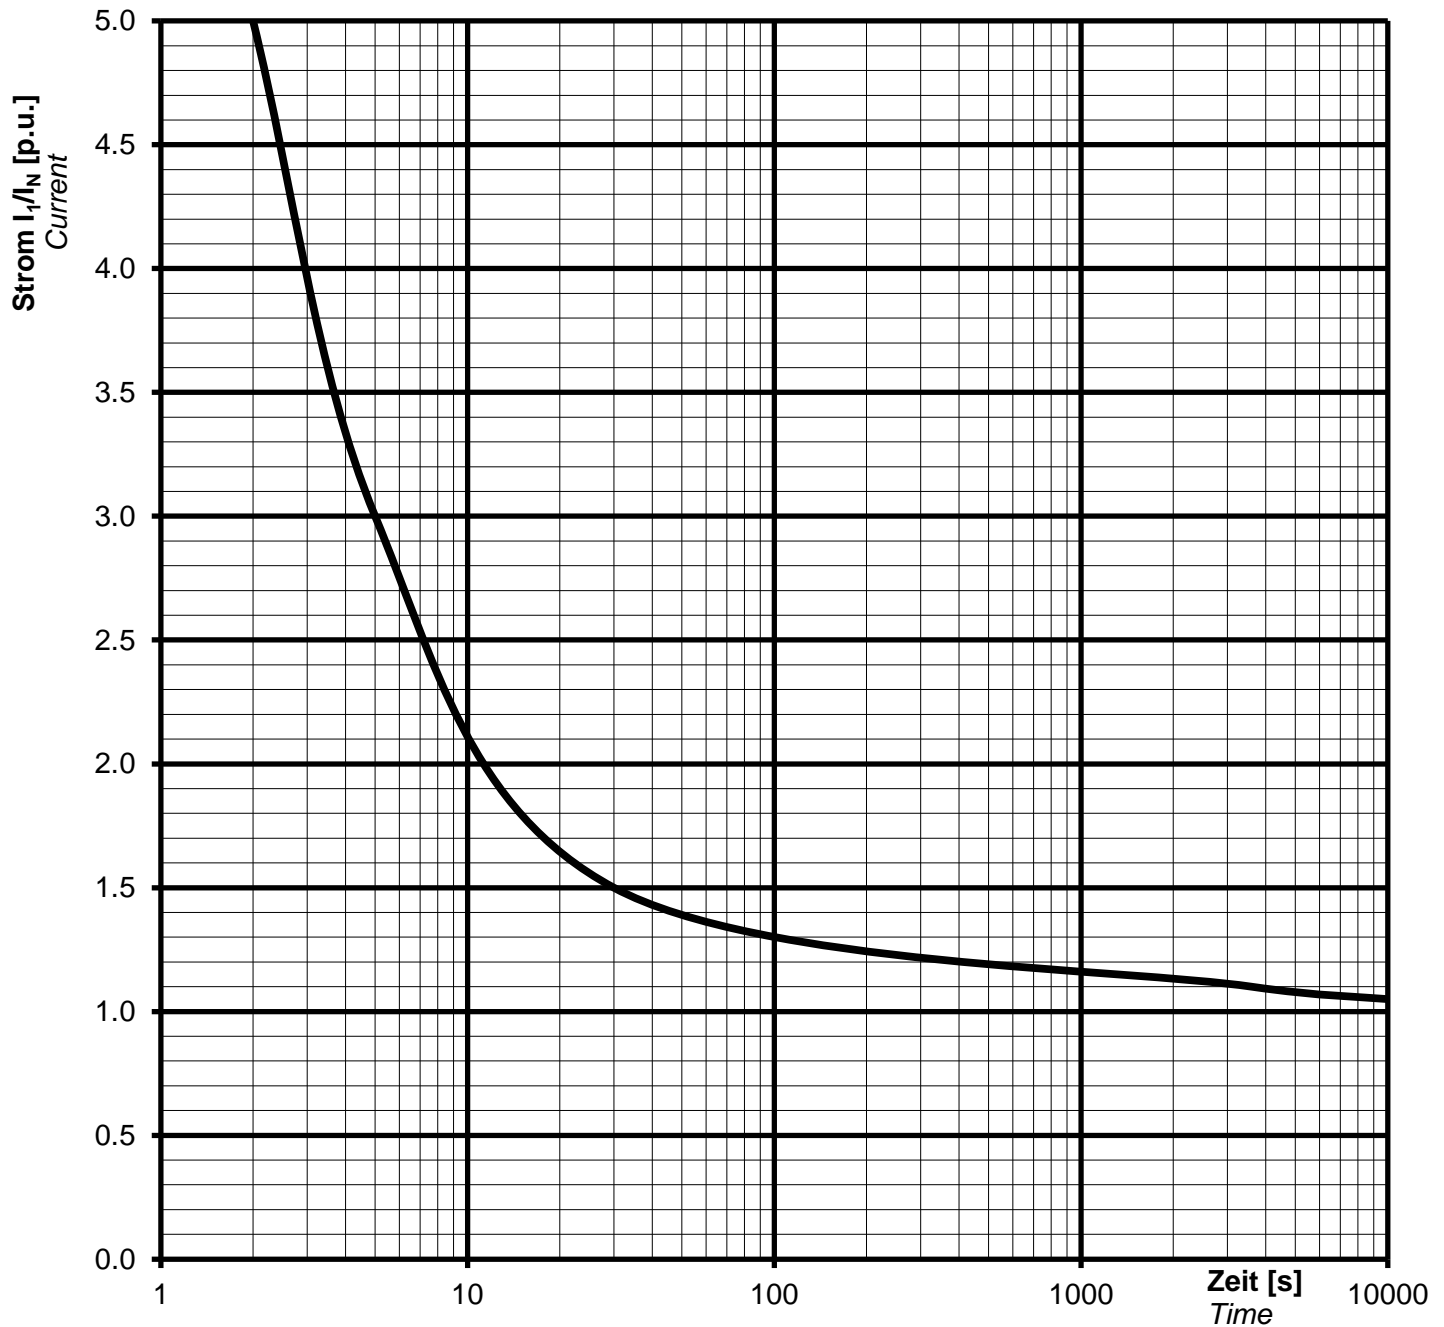

Notizen / remarks:

Strom / Zeit Kriterien:

$(I / I_N)^2 \cdot t = 45s$

Current/time characteristics:

1,5 * I_N for 30 s

1,1 * I_N for 1 h in 6h

Nenndaten / nominal data

DSG 74 L1/6

Rating S_N : **1270 kVA**

p.f. **0.80**

Bemessungsleistung

Leistungsfaktor $\cos \varphi$:

Nominal voltage U_N : **0.69 kV**

Nominal current I_N : **1063 A**

Bemessungsspannung

Bemessungsstrom

Frequency f_N : **60 Hz**

Speed n : **1200 min⁻¹**


Frequenz

Drehzahl

Protection: **IP23**

Schutzart

Inverse current or unbalanced negative sequence current

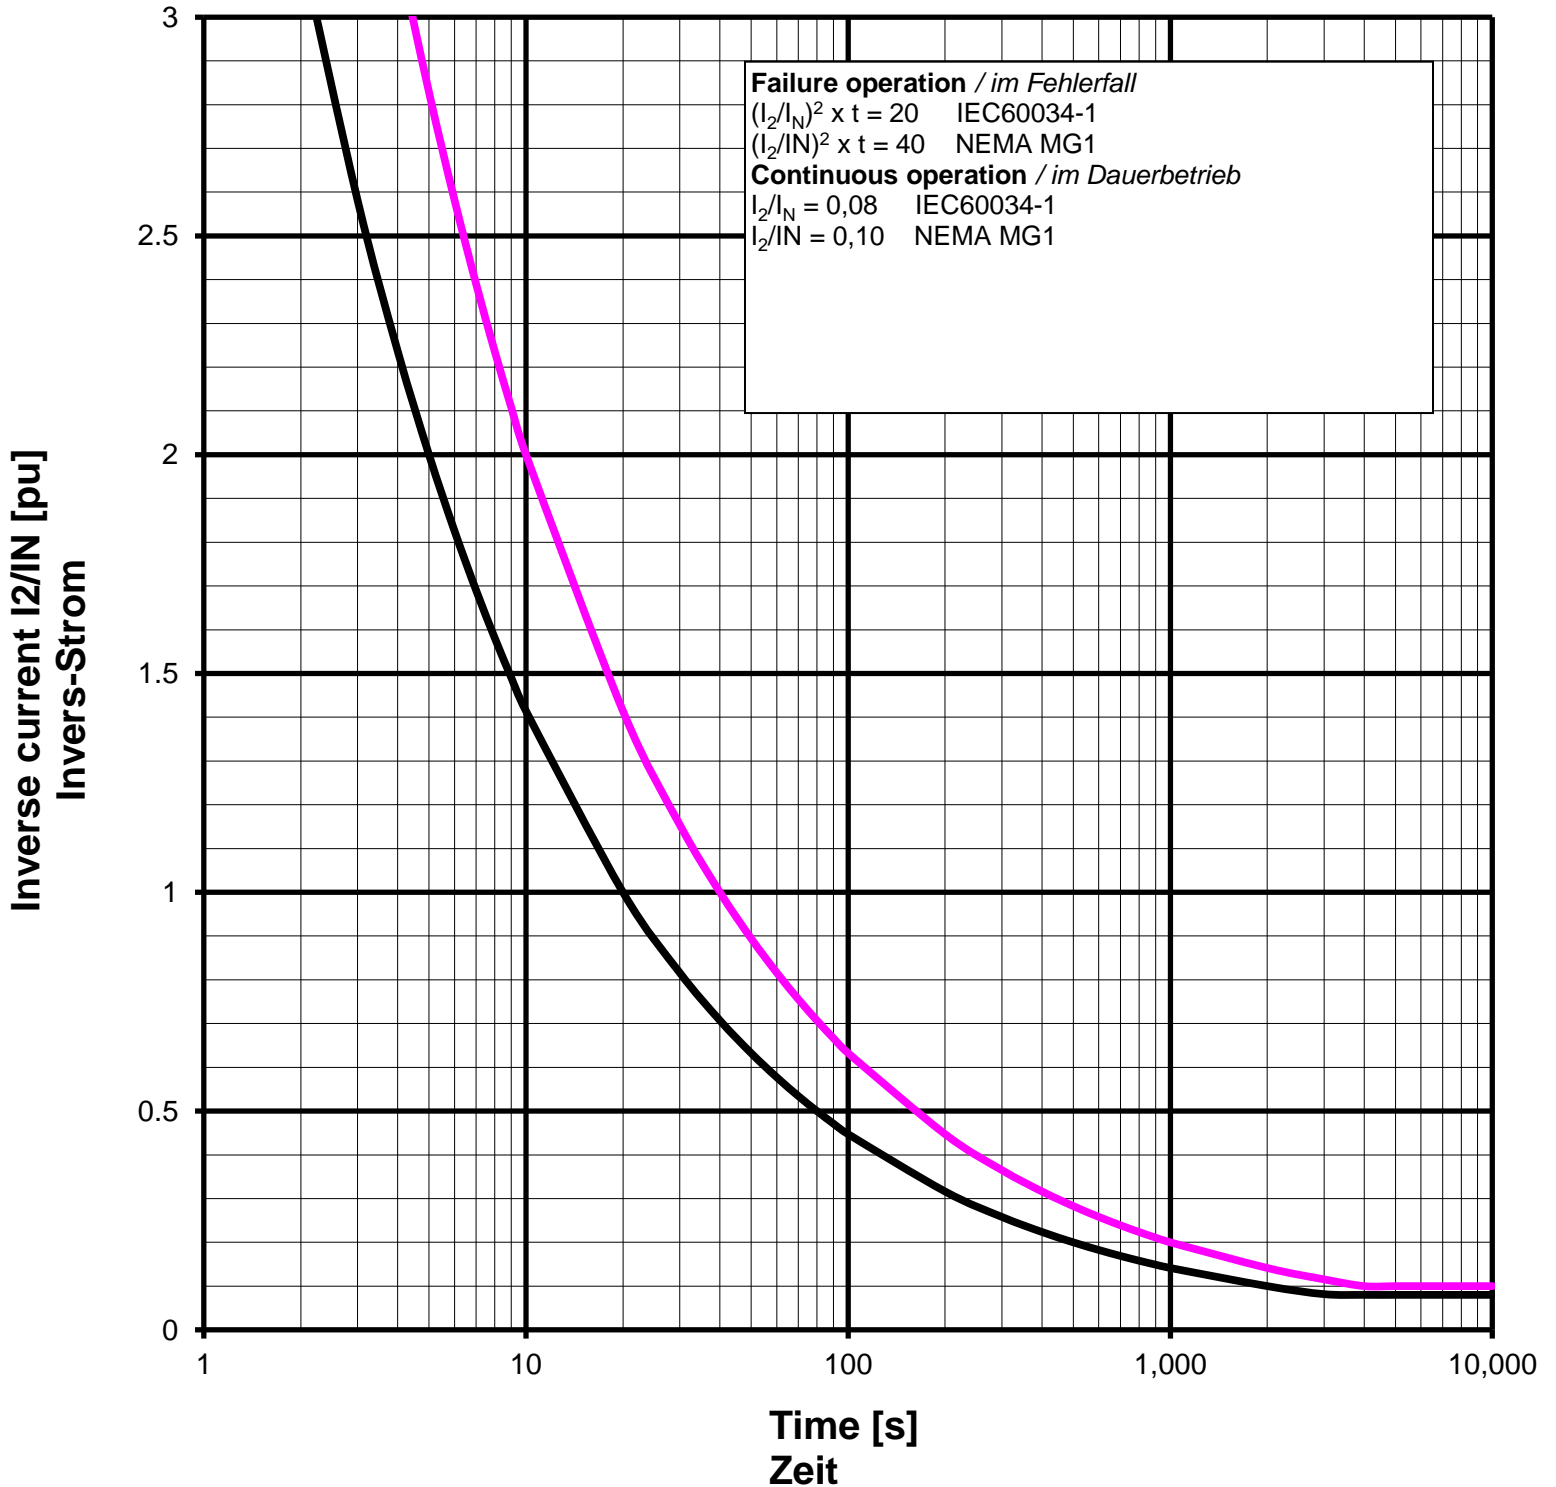

Remarks / Notizen:



Technische Daten selbstregelnden Drehstrom-Synchrongenerator
technical data for self regulating three phase alternator

ING-FCD-0112


TYPE

DSG 74 L1/6

Projekt:

Order Nr.:

Capability (P-Q) Diagram

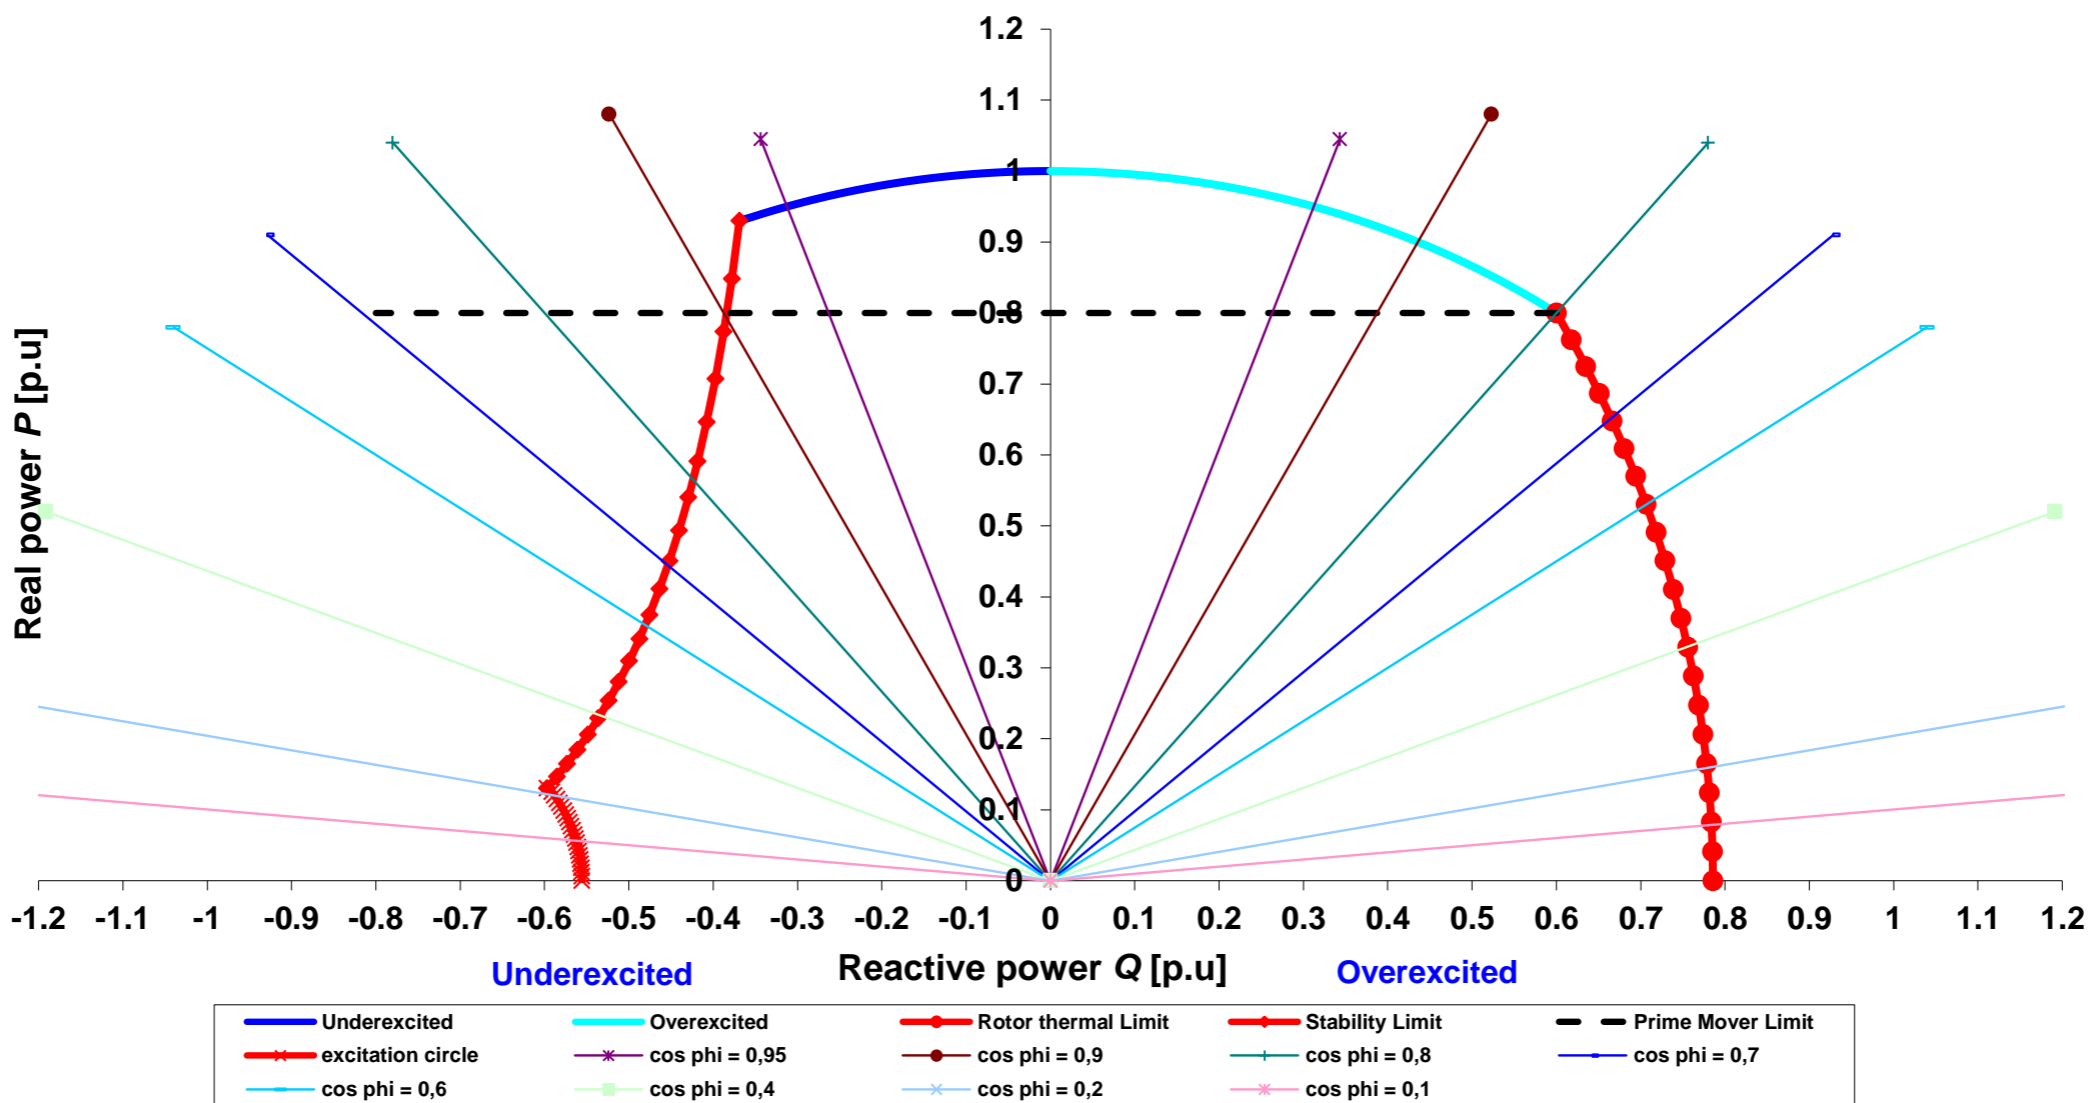

Cummins Generator Technologies

Datum / date:

03/01/2014

