

66-2039

ISSUE D

IF IN DOUBT-ASK  
DO NOT SCALE


INDICATES POSITION OF A.V.R.

FIRST W.O.

A.V.R. STANDARD POSITION

REMOVABLE SIDE COVERS

A.V.R. ALTERNATIVE POSITION

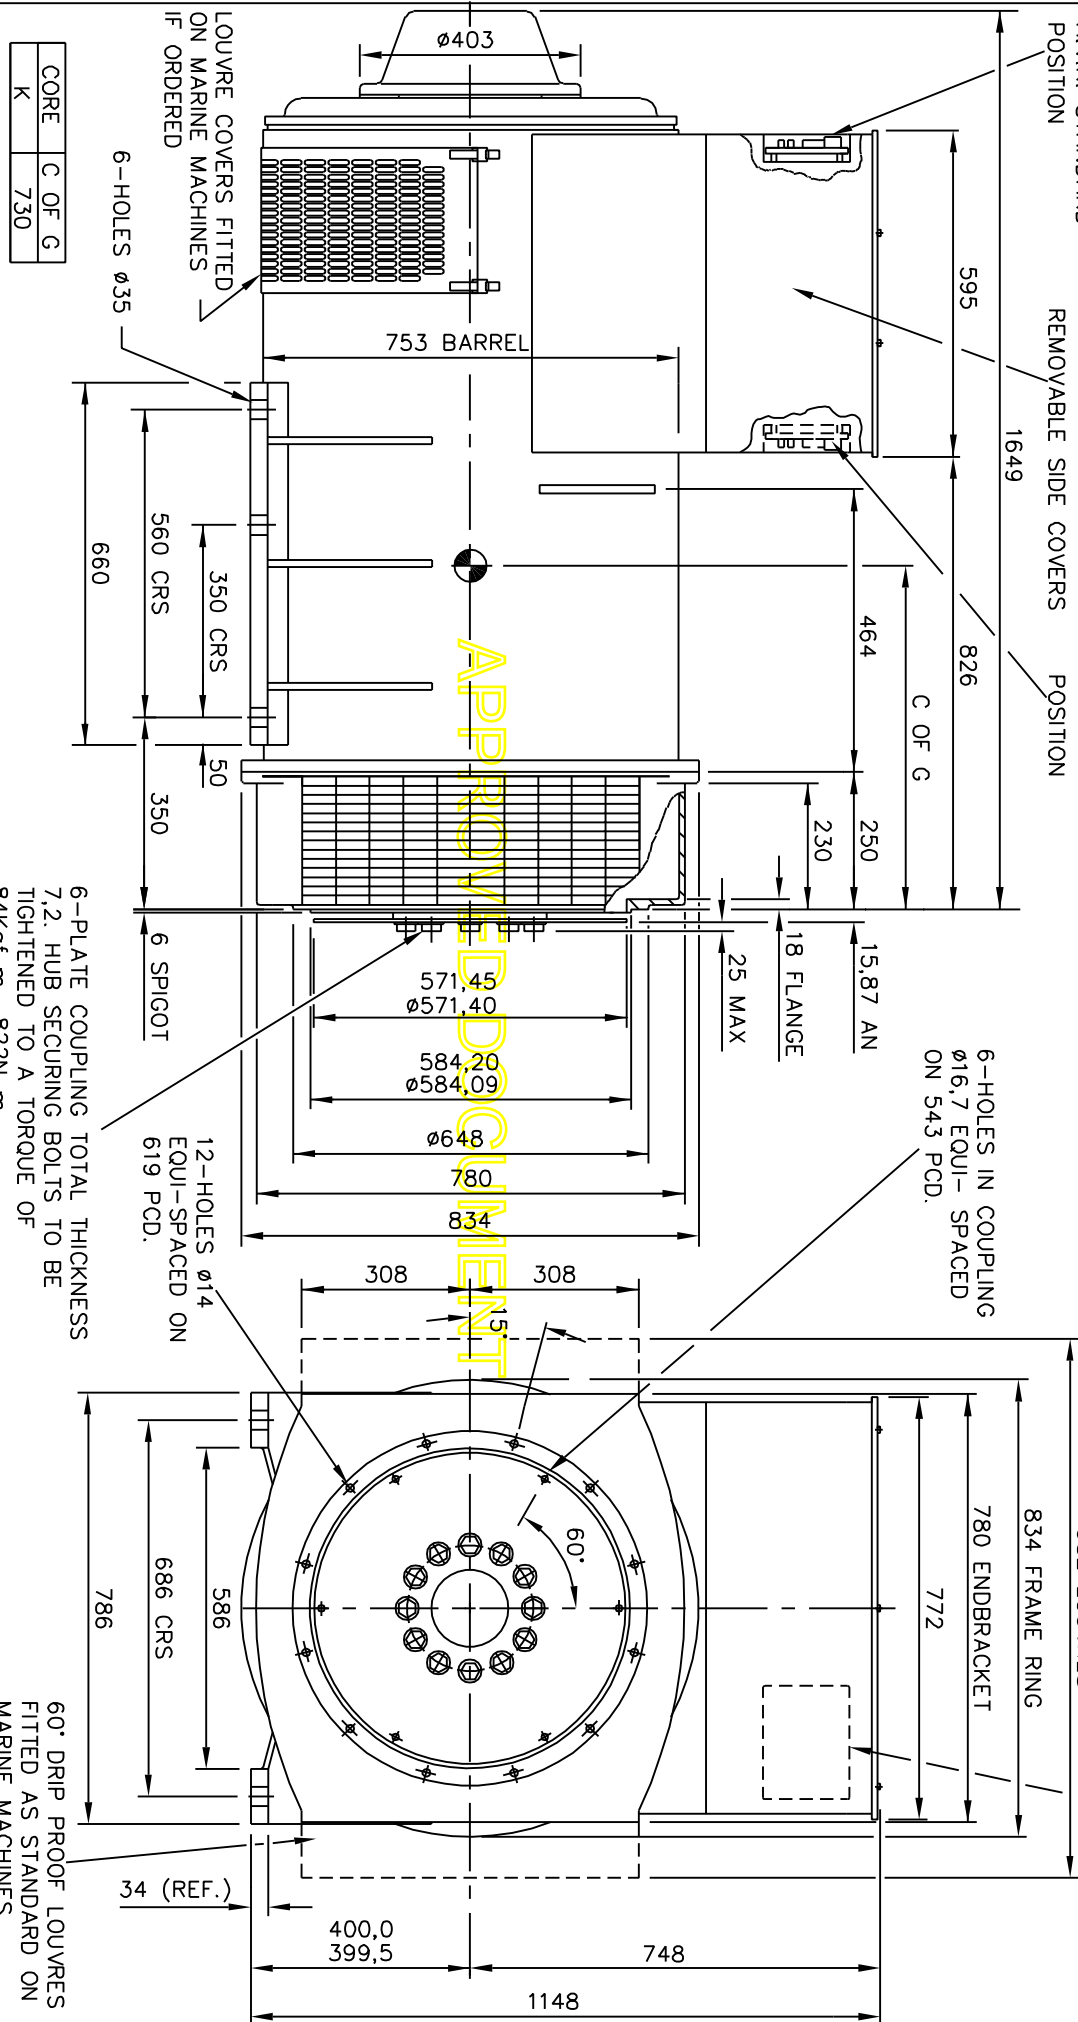

6-PLATE COUPLING TOTAL THICKNESS 7.2. HUB SECURING BOLTS TO BE TIGHTENED TO A TORQUE OF 84kgf m 822N m.

60° DRIP PROOF LOUVRES FITTED AS STANDARD ON MARINE MACHINES OTHERS IF ORDERED

NOTE:-  
CUSTOMER MAY CUT CABLE ENTRY HOLES AS REQUIRED IN ANY OF THE FOUR TERMINAL BOX SIDES SUBJECT TO POSITION OF A.V.R. TERMINALS ETC.

CORE	C OF G
K	730

4-9486-04	D	SAP	21/04/2008	ADD FOOT REFERENCE THICKNESS
4-8664-02	C	USD	15/09/2006	CHANGE OF COMPANY NAME
4-7147-11	B	USD	08/02/2006	NDE LOUVRED PANEL REPLACED BY MESH COVER
4-2766-02	A	AJB	05/10/2000	ORIGINAL ISSUE
MOD'N	ISSUE	DRAWN	DATE	ALTERATION

CERTIFIED PRINT		DATE		DATE		DATE	
(ONLY IF SIGNED)		BY		DATE		DATE	
HC/CG6-1K(4 POLE) ALTERNATOR ADAPTOR - SAE 1/2 COUPLING - SAE18 STANDARD T/BOX		CUMMINS GENERATOR TECHNOLOGIES LTD STAMFORD ENGLAND		SCALE 1:10		FIRST W.O.	
APP'D		SMH		22/04/2008		UNIT OF MEASUREMENT MILLIMETRES (mm)	
66-2039		ISSUE		D			