

# STAMFORD®

S1L2-Y Winding 17

## S1L2-Y - Technical Data Sheet

### Standards

Stamford industrial alternators meet the requirements of IEC EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

### Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



### Excitation and Voltage Regulators

Excitation System	
<b>AVR Type</b>	<b>AVR Power</b>
VITA01	Self-Excited
Voltage Regulation	± 0.5%
No Load Excitation Voltage (V)	10.3 V
Full Load Excitation Voltage (V)	46.6 V

# STAMFORD®

## S1L2-Y Winding 17

Electrical Data	
Insulation System	Class H
Stator Winding	Double Layer Concentric
Winding Pitch	Two Thirds
Winding Leads	12
Winding Number	17
Number of Poles	4
IP Rating	IP23
RFI Suppression	EN 61000-6-2 & EN 61000-6-4, refer to factory for others
Waveform Distortion	NO LOAD < 2.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%
Short Circuit Ratio	1/Xd
Steady State X/R Ratio	N/A
<b>60 Hz</b>	
Telephone Interference	TIF<75
Voltage Series Star	600
Voltage Parallel Star	300
Voltage Series Delta	346
kVA Base Rating (Class H)	75
Saturated Values in Per Unit at Base Ratings and Voltages	
Xd Dir. Axis Synchronous	2.112
X'd Dir. Axis Transient	0.073
X''d Dir. Axis Subtransient	0.065
Xq Quad. Axis Reactance	1.299
X''q Quad. Axis Subtransient	0.128
XL Stator Leakage Reactance	0.073
X2 Negative Sequence Reactance	0.064
X0 Zero Sequence Reactance	0.053
Unsaturated Values in Per Unit at Base Ratings and Voltages	
Xd Dir. Axis Synchronous	2.534
X'd Dir. Axis Transient	0.084
X''d Dir. Axis Subtransient	0.076
Xq Quad. Axis Reactance	1.338
X''q Quad. Axis Subtransient	0.154
XL Stator Leakage Reactance	0.082
X2 Negative Sequence Reactance	0.077
X0 Zero Sequence Reactance	0.062
Time Constants (Seconds)	
T'd TRANSIENT TIME CONST.	0.015
T''d SUB-TRANSTIME CONST.	0.002
T'do O.C. FIELD TIME CONST.	0.672
Ta ARMATURE TIME CONST.	0.005

# STAMFORD®

## S1L2-Y Winding 17


Resistances in Ohms ( $\Omega$ ) at 22°C		
Stator Winding Resistance (Ra)	0.132 $\Omega$ per phase series star connected	
Rotor Winding Resistance (Rf)	1.279 $\Omega$	
Exciter Stator Winding Resistance	16.000 $\Omega$	
Exciter Rotor Winding Resistance	0.137 $\Omega$ per phase	
Positive Sequence Resistance (R1)	0.165 $\Omega$	
Negative Sequence Resistance (R2)	0.19 $\Omega$	
Zero Sequence Resistance (R0)	0.165 $\Omega$	
Aux Winding Resistance	N/A	
Mechanical data		
Cooling Air	0.212 m <sup>3</sup> /sec	
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation.	
Bearing	1 Bearing	2 Bearing
Weight Complete Alternator	241 kg	263 kg
Weight Wound Stator	109.5 kg	109.5 kg
Weight Wound Rotor	89.1 kg	91.1 kg
Moment of Inertia	0.4365 kgm <sup>2</sup>	0.4372 kgm <sup>2</sup>
Shipping weight in a Crate	289 kg	310 kg
Packing Crate Size	1050X570X960 mm	1050X570X960 mm
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	-	BALL. 6309-2RS (ISO)
Bearing Non-Drive End	Ball Bearing, 6306-2RS1	Ball Bearing, 6306-2RS1

# STAMFORD®

S1L2-Y Winding 17

## Three Phase Efficiency Curves

### 60Hz Curves

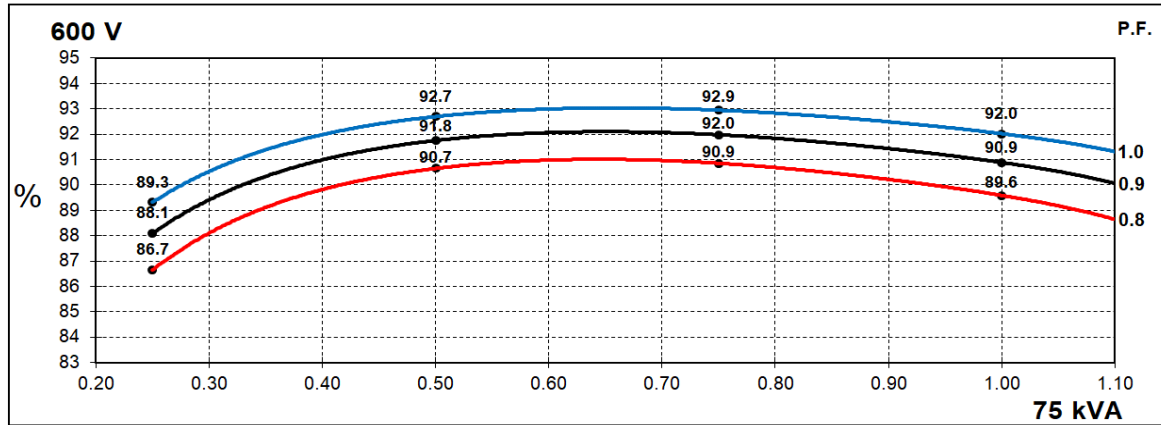


# STAMFORD®

## S1L2-Y Winding 17

### Locked Rotor Motor Starting Curves

**60Hz**

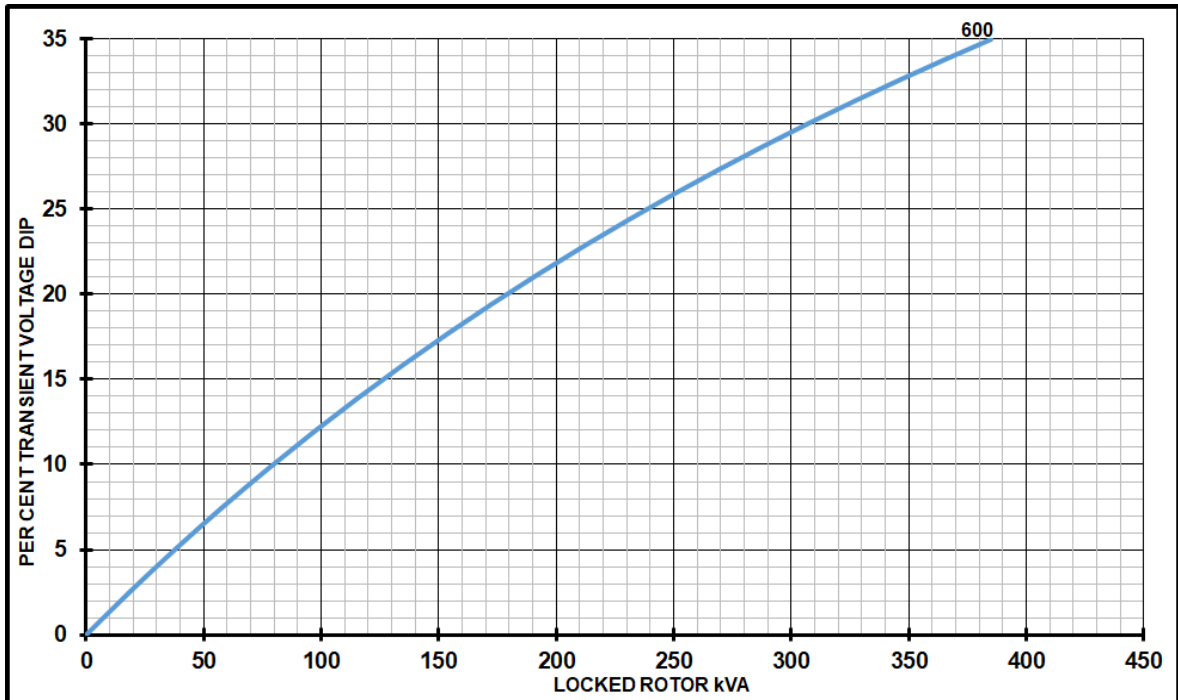

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor	
Lagging PF	Scaling Factor	Lagging PF	Scaling Factor
<= 0.4	1.00	<= 0.4	1.25
0.5	0.95	0.5	1.20
0.6	0.90	0.6	1.15
0.7	0.86	0.7	1.10
0.8	0.83	> 0.7	1.00
0.9	0.75		
0.95	0.70		
1	0.65		

**Note:** To determine % Transient Voltage Dip or Rise at various PF, multiply the % Voltage Dip from the curve directly by the scaling factor.


# STAMFORD®

## S1L2-Y Winding 17

### Three-phase Short Circuit Decrement Curve

*Winding 17 (no Auxiliary winding) will not provide sustained short circuit capability.*

**60Hz**

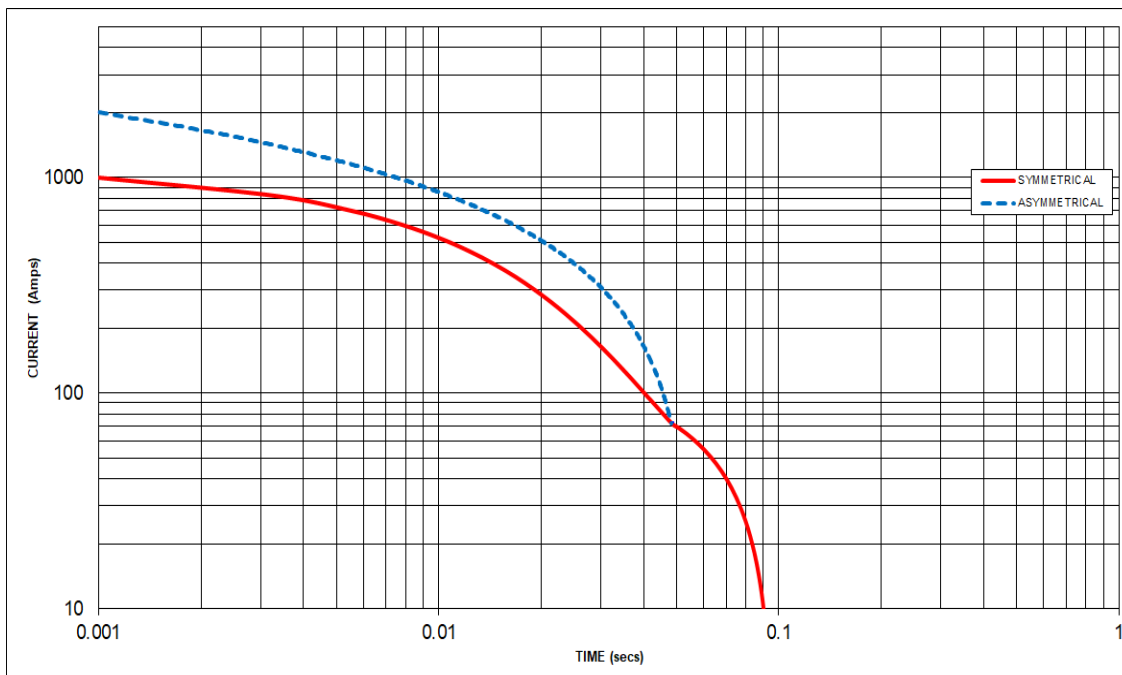

**Note 1**

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
-	-	600V	X 1.00
-	-	-	-
-	-	-	-
-	-	-	-

The sustained current value is constant irrespective of voltage level

**Note 2**

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	N/A	N/A	N/A
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

**Note 3**


Curves are drawn for Star connected machines under no-load excitation at rated speeds. For other connection the following multipliers should be applied to current values as shown :  
 Parallel Star = Curve current value X 2  
 Series Delta = Curve current value X 1.732

# STAMFORD®

## S1L2-Y Winding 17

### Typical Alternator Operating Charts

**600V/60Hz**

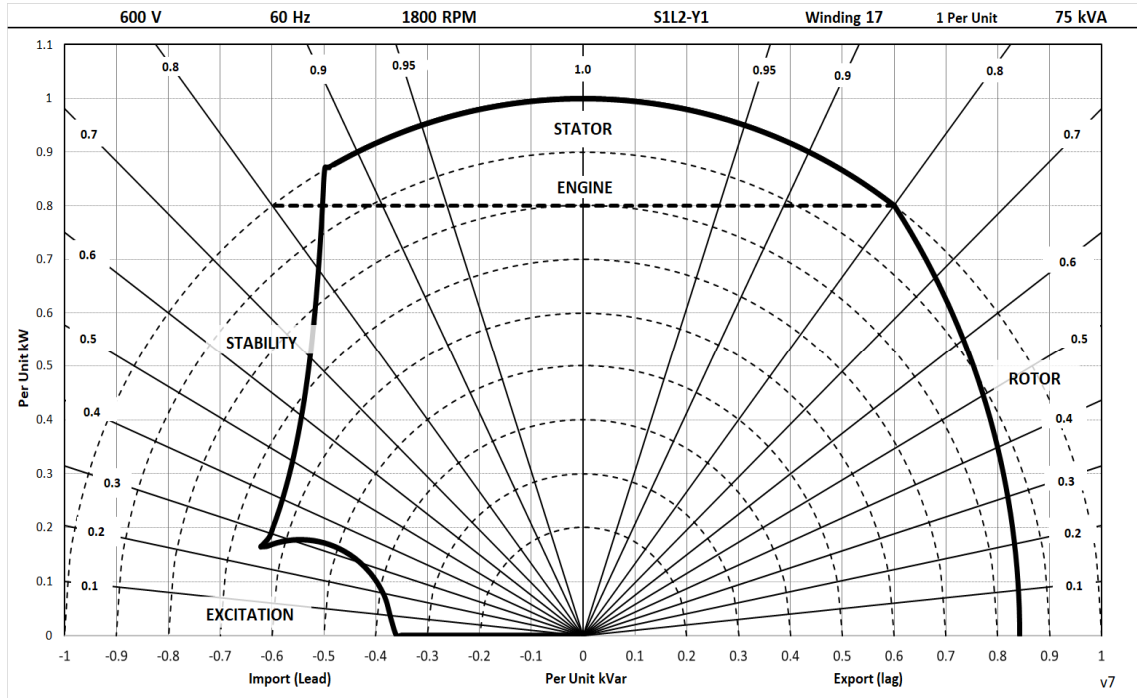

# STAMFORD®

## S1L2-Y Winding 17

### RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise	Standby - 163/27°C	Standby - 150/40°C	Cont. H - 125/40°C	Cont. F - 105/40°C
<b>50</b> Hz	Series Star (V)			
	Parallel Star (V)	N/A	N/A	N/A
	Series Delta (V)			
	kVA			
	kW	N/A	N/A	N/A
	Efficiency (%)			
	kW Input			

<b>60</b> Hz	Series Star (V)	600	600	600	600
	Parallel Star (V)	300	300	300	300
	Series Delta (V)	346	346	346	346
	kVA	80.0	78.8	75.0	68.0
	kW	64.0	63.0	60.0	54.4
	Efficiency (%)	89.0	89.2	89.6	90.2
	kW Input	71.9	70.7	67.0	60.3

#### De-Rates

All values tabulated above are subject to the following reductions:

- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

#### Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

**Note:** Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.





Follow us @stamfordavk



Cummins Generator Technologies



View our videos at [youtube.com/stamfordavk](https://youtube.com/stamfordavk)

**[news.stamford-avk.com](https://news.stamford-avk.com)**

**For Applications Support:**  
**[applications@cummins.com](mailto:applications@cummins.com)**

**For Customer Service:**  
**[service-engineers@stamford-avk.com](mailto:service-engineers@stamford-avk.com)**

**For General Enquiries:**  
**[info@cumminsgeneratortechnologies.com](mailto:info@cumminsgeneratortechnologies.com)**

Copyright 2025. Cummins Generator Technologies Ltd. All rights reserved.  
Cummins and the Cummins logo are registered trade marks of Cummins Inc.  
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

