



**DECS-150 Digital Excitation Control System** 

## **Overview**

The DECS-150 Digital Excitation Control System is a high powered, low-cost, and environmentally rugged solution for controlling the output of rotary excited synchronous generators. The DECS-150 is perfect for machines that are paralleled to other generators and/or the utility system. It is ideal for distributed generation, cogeneration, and peak shaving applications.

### Features

- Microprocessor based
- 0.25% voltage regulation accuracy
- 0.5% accuracy up to 40% Total Harmonic Distortion (THD) (harmonics associated with six-thyristor load)
- 63 Vdc and 125 Vdc @ 10 Adc pulse-width-modulated (PWM) output
- Capable of 10 Adc continuous field current output when system temperature is 55°C (131°F) or below
- · Load Sharing over Ethernet
- Auto tuning feature with two PID stability groups
- Var/PF control
- Exciter Diode Monitor (EDM)
- Overexcitation limiting
- Underexcitation limiting
- Stator current limiting
- Voltage matching
- Manual mode (field current regulation)
- · Paralleling input from 1-amp or 5-amp CT secondaries
- Nominal sensing inputs of 120, 240, 480, and 600 Vac
- Power input from 50/60 Hz shunt connection or permanent magnet generator (PMG) operating at 50 to 500 Hz
- Integrated protection functions including Loss of Sensing and Transfer to Manual
- LED annunciation of operating conditions
- Ethernet communications with Modbus<sup>®</sup> TCP
- Set up via PC using BESTCOMSPlus<sup>®</sup> software (included)
- Customizable logic in BESTlogic<sup>™</sup>Plus
- IP54 rating when rear-mounted USB option is selected

### **Benefits**

- Microprocessor-based design provides high functionality and performance.
- Powerful 7-amp, PWM power stage provides high field forcing for increased system response.
- THD-tolerant design offers reliable operation with nonlinear loads.
- Integrated generator and exciter protection ensure proper system operation.
- Rugged, potted design for exceptional reliability in the harshest environments.
- Auto tuning allows for easier commissioning, saving time and money.
- External Autotracking provides redundancy and more reliable system design.
- Grid code settings provide compatibility with grid code compliant systems.




Figure 1 - DECS-150 Connection Diagram for a Typical Application



# **DECS-150 Digital Excitation Control System**

#### **AC Operating Power and DC Operating Power**

All Styles		
Full Load Continuous Current:	10 A at 55°C (131°F)	
	7 A at 70°C (158°F)	
Power Input Configuration:	1-phase and 3-phase	
Power Input Frequency:	dc, 50 to 500 Hz	
63 Vdc		
Nominal Input Voltage:	120 Vac, 125 Vdc	
Full Load Continuous Voltage:	63 Vdc	
Minimum Field Resistance:	9 Ω	
10-Second Forcing:	100 Vdc, 11 Adc	
125 Vdc		
Nominal Input Voltage:	240 Vac, 250 Vdc	
Full Load Continuous Voltage:	125 Vdc	
Minimum Field Resistance:	18 Ω	
10-Second Forcing:	200 Vdc, 11 Adc	

#### **Generator and Bus Voltage Sensing**

Configuration:	1-phase or
	3-phase-3-wire
50 Hz Voltage Ranges:	100 Vac ±10%
	200 Vac ±10%
	400 Vac ±10%
60 Hz Voltage Ranges:	120 Vac ±10%
	240 Vac ±10%
	480 Vac ±10%
	600 Vac ±10%
Frequency:	50/60 Hz nominal
Burden:	<1 VA per phase

# **Specifications**

#### **Generator Current Sensing**

Configuration:

Nominal Current: Frequency: Burden with 1 Aac Sensing Burden with 5 Aac Sensing:

#### **Inputs and Outputs**

Contact Inputs: Type: Interrogation Voltage: Auxiliary Inputs: Current Input: Voltage Input: **Output Contacts:** 

Rating:


#### Communication USB:

Ethernet:

CAN Bus:

	1-phase or 3-phase with
	separate input for cross-
	current compensation
	1 Aac or 5 Aac
	50/60 Hz
	<0.1 VA
:	<0.3 VA
	8 programmable
	Dry contact
	12 Vdc
	1
	4 to 20 mAdc
	-10 to +10 Vdc
	2 programmable
	1 watchdog
	1 breaker shunt trip
	7 A at 24 Vdc/240 Vac

USB type B port (front or rear panel optional) RJ45 jack (rear panel) 10BASE-T/100BASE-TX (copper), Modbus® TCP External Autotracking

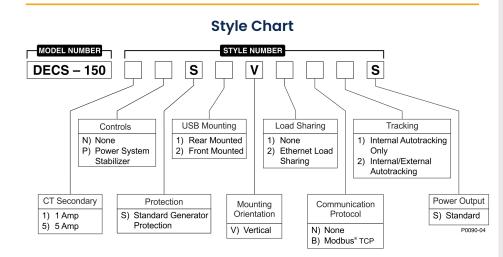



12570 Route 143 • Highland, Illinois 62249-1074 USA Tel +1 618.654.2341 • Fax +1 618.654.2351 email: info@basler.com

No. 59 Heshun Road Loufeng District (N), Suzhou Industrial Park 215122 Suzhou PR China Tel +86.512.8227.2888 • Fax +86.512.8227.2887 e-mail: chinainfo@basler.com

111 North Bridge Road #15-06 Peninsula Plaza Singapore 179098 Tel +65 68.44.6445 • Fax +65 68.44.8902 e-mail: singaporeinfo@basler.com

#### Agency/Certification

UL recognized (evaluated to UL 6200), CSA certified, EAC certified, CE EMC, LVD, and RoHS compliant, maritime recognitions by BV, DNV•GL, and ABS

#### Environmental

Operating Temperatu	Ire
10 A Continuous:	-40°C to 55°C (-40°F to 131°F)
7 A Continuous:	-40°C to 70°C (-40°F to 158°F)
Storage Temperature	e: -40°C to 85°C (-40°F to 185°F)
Humidity:	MIL-STD-705B, Method 711-1C
Salt Fog:	IEC 60068-2-11
Shock:	Withstands 30 G in 3 perpendicular planes
Vibration:	5 G for 3 hours from 18 to 2,000 Hz
Transients:	EN61000-4-4
Static Discharge:	EN61000-4-2

#### **Physical**

Weight: 3.95 lb (1.79 kg)

Dimensions (WxHxD): 6.41 x 11.88 x 3.23 inches (163 x 302 x 82 mm)

For complete specifications, download the instruction manual at www.basler.com.

#### **Related Products**

#### BE1-11g Generator Protection System

Combines with the DECS-150 to offer a complete generator control and protection system.

#### **ES Series Protection Relays**

A wide range of cost-saving options to simplify industrial application protection.

#### **DECS-250 Digital Excitation Control System**

Provides precise voltage, var and Power Factor regulation, and exceptional system response, plus generator and motor protection.

#### DGC-2020 Digital Genset Controller

An advanced genset control system with extensive functionality and flexibility.

#### **DGC-2020ES Digital Genset Controller**

The total system solution for emergency and stand alone generator set applications.

#### **DGC-2020HD Digital Genset Controller**

An advanced, but rugged genset control system designed for paralleling and complex load sharing schemes

#### **Accessories**

#### ICRM-7, ICRM-15

Protects PWM-type voltage regulators from high inrush currents when powered by an independent source.

#### MVC Manual Voltage Controllers

Provides backup manual source for excitation in the event of AVR failure.

