




## S7L1D-D4 & S7L1W-D4 (Industrial) Wdg.26 - Technical Data Sheet

### Standards

STAMFORD industrial alternators meet the requirements of the relevant parts of the IEC 60034 and the relevant sections of other international standards such as BS5000-3, ISO 8528-3, VDE 0530, NEMA MG1-32, CSA C22.2-100 and AS 60034. Other standards and certifications can be considered on request.

### Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

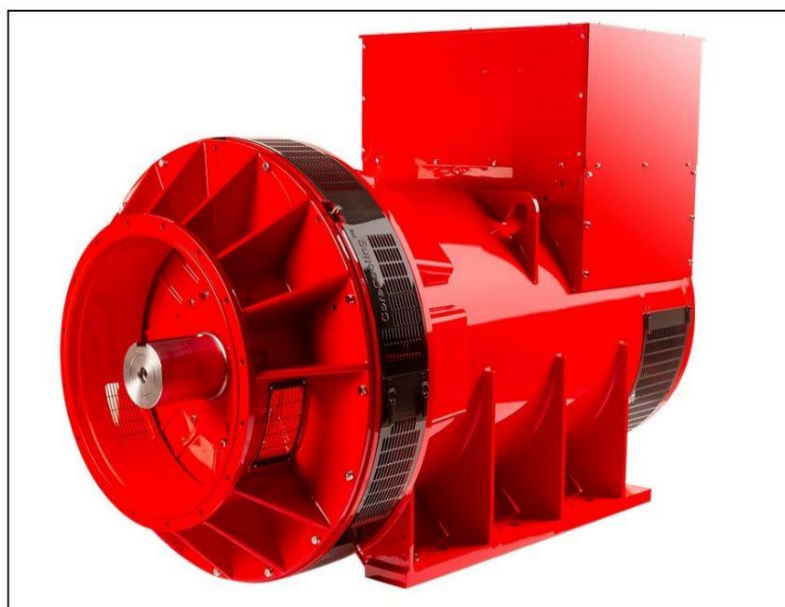

\*Image depicts the S7L1D alternator

### Excitation and Voltage Regulators

Excitation System					
AVR Type	MX341	MX322	DECS100	DECS150	
Voltage Regulation	± 1%	± 0.5%	± 0.25%	± 0.25%	with 4% Engine Governing
AVR Power	PMG	PMG	PMG	PMG	

No Load Excitation Voltage (V)	18.1
No Load Excitation Current (A)	0.81
Full Load Excitation Voltage (V)	72
Full Load Excitation Current (A)	3
Exciter Time Constant (seconds)	0.125

# STAMFORD®

## S7L1D-D4 & S7L1W-D4 (Industrial) Wdg.26

Electrical Data		
Insulation System	H	
Stator Winding	Double Layer Concentric	
Winding Pitch	2/3	
Winding Leads	6	
Winding Number	26	
Number of Poles	4	
IP Rating	IP23 or IP44* (see footnote)	
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4,VDE 0875G, VDE 0875N. Refer to factory for others	
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%	
Short Circuit Ratio	1/Xd	
Steady State X/R Ratio	31.32	
50 Hz		
Telephone Interference	THF<2%	
Cooling Air Flow	2.63 m³/sec	
Voltage Star (V)	660	690
Voltage Parallel Star (V)	-	-
Voltage Delta (V)	-	-
kVA Base Rating (Class H) for Reactance Values (kVA)	1650	1650
Saturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	2.62	2.40
X'd Dir. Axis Transient	0.18	0.16
X''d Dir. Axis Subtransient	0.12	0.11
Xq Quad. Axis Reactance	1.89	1.73
X''q Quad. Axis Subtransient	0.19	0.17
XL Stator Leakage Reactance	0.08	0.07
X2 Negative Sequence Reactance	0.17	0.16
X0 Zero Sequence Reactance	0.02	0.01
Unsaturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	3.15	2.88
X'd Dir. Axis Transient	0.20	0.19
X''d Dir. Axis Subtransient	0.14	0.13
Xq Quad. Axis Reactance	1.95	1.78
X''q Quad. Axis Subtransient	0.22	0.21
XL Stator Leakage Reactance	0.09	0.08
Xlr Rotor Leakage Reactance	0.20	0.19
X2 Negative Sequence Reactance	0.21	0.19
X0 Zero Sequence Reactance	0.02	0.02

\*Notes:

- 1) S7L1W: IP44 rating with IC81W cooling (watercooled) and 25°C water inlet temperature.
- 2) S7L1D: IP23 rating with IC01 cooling (open-circuit cooling) as standard.

# STAMFORD

## S7L1D-D4 & S7L1W-D4 (Industrial) Wdg.26

Time Constants (Seconds)		
T'd Transient Time Const.		0.141
T''d Sub-Transient Time Const.		0.016
T'do O.C. Field Time Const.		4.180
Ta Armature Time Const.		0.036
T''q Sub-Transient Time Const.		0.0097
Resistances in Ohms ( $\Omega$ ) at 22°C		
Stator Winding Resistance (Ra), per phase for series connected		0.00282
Rotor Winding Resistance (Rf)		1.82
Exciter Stator Winding Resistance		22.3
Exciter Rotor Winding Resistance per phase		0.065
PMG Phase Resistance (Rpmg) per phase		1.91
Positive Sequence Resistance (R1)		0.0035
Negative Sequence Resistance (R2)		0.0041
Zero Sequence Resistance (R0)		0.0035
Saturation Factors		690V
SG1.0		0.397
SG1.2		2.726
Mechanical Data		
Shaft and Keys	All alternator rotors are dynamically balanced to better than ISO 21940-11 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearing
SAE Adaptor	SAE0 , 00	SAE0, 00
Moment of Inertia	37.2 kgm <sup>2</sup>	36.3 kgm <sup>2</sup>
Weight Wound Stator	1395kg	1395kg
Weight Wound Rotor	1255kg	1203kg
Weight Complete Alternator	3066kg	3043kg
Shipping weight in a Crate	3115kg	3092kg
Packing Crate Size	200 X 105 X 155(cm)	200 X 105 X 155(cm)
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	-	BALL. 6228; Sleeve EFWLK 14 (optional)
Bearing Non-Drive End	BALL. 6319	BALL. 6319; Sleeve EFNLQ 11 (optional)

### Notes:



- 1) Mechanical data are applicable for S7L1D with anti-friction bearing. Refer the GA and rotor drawings for S7L1W and sleeve bearing.
- 2) S7L1W and/ or sleeve bearings are available for 2-bearing alternators only.
- 3) SAE adaptor options are not applicable for sleeve bearing.

# STAMFORD®

S7L1D-D4 & S7L1W-D4 (Industrial) Wdg.26

## THREE PHASE EFFICIENCY CURVES

50Hz

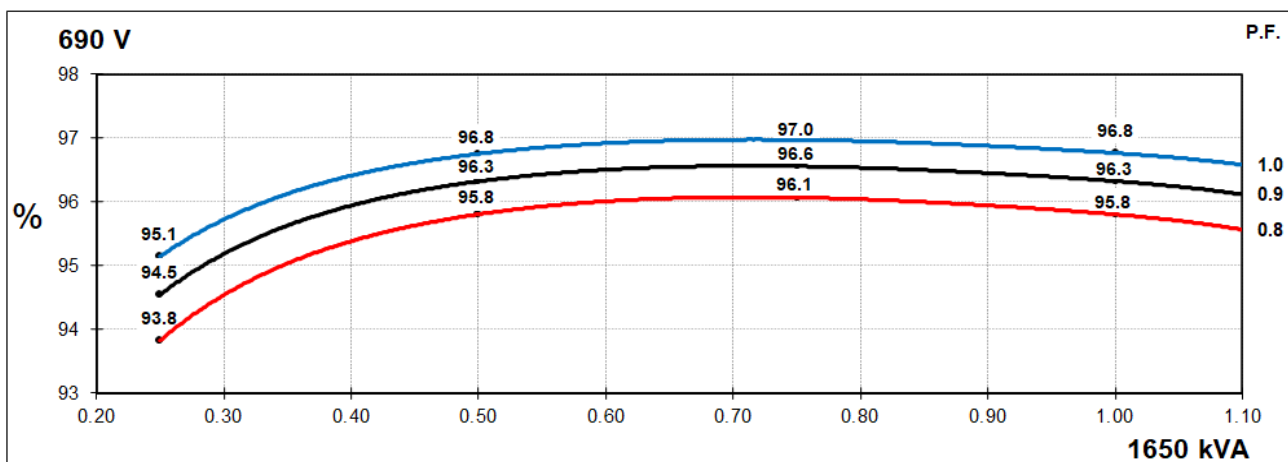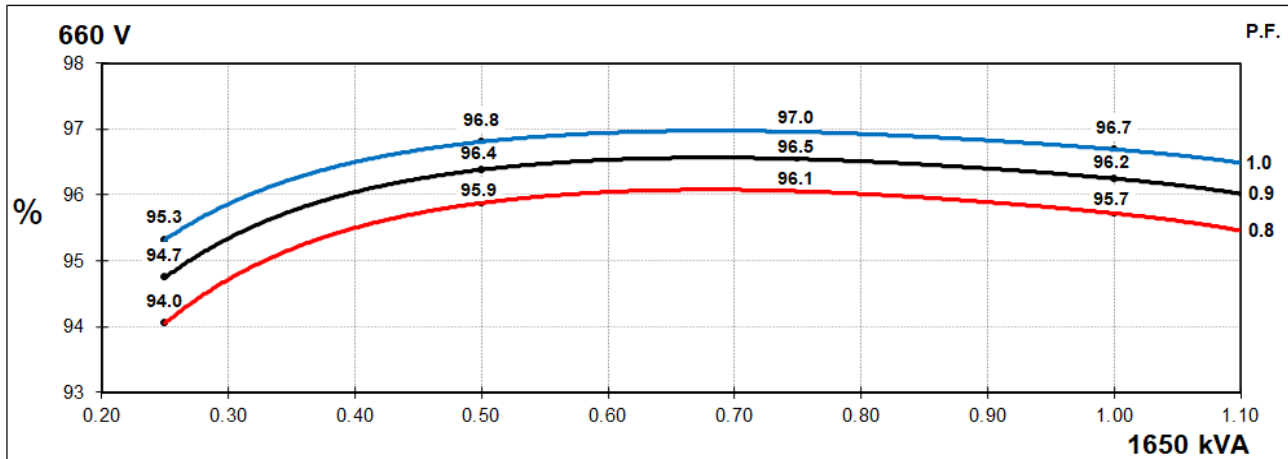


# STAMFORD

## S7L1D-D4 & S7L1W-D4 (Industrial) Wdg.26

### Locked Rotor Motor Starting Curves - Separately Excited

**50Hz**

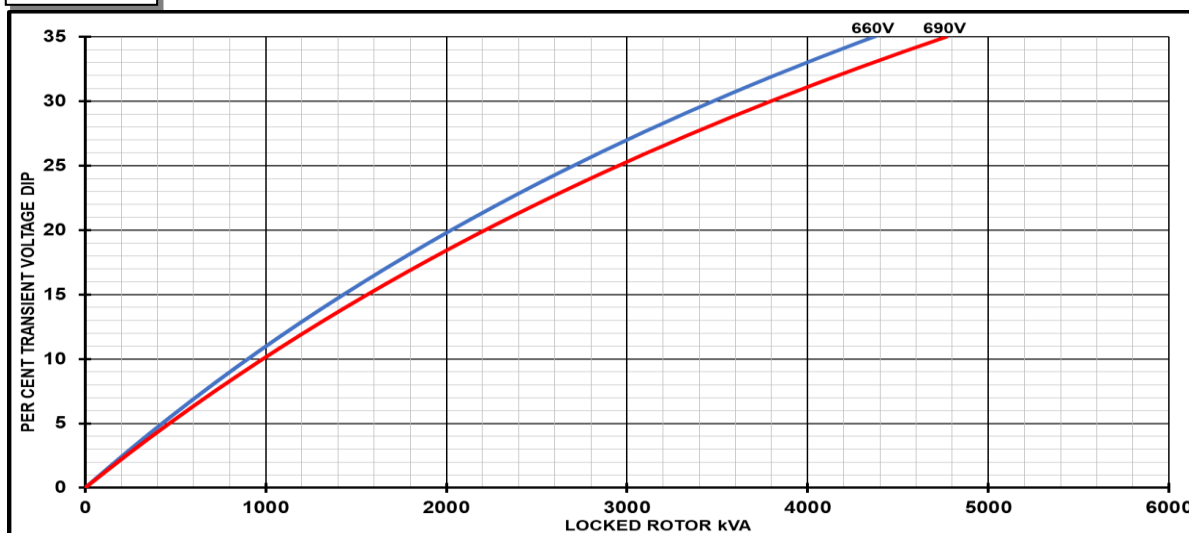

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor	
Lagging PF	Scaling Factor	Lagging PF	Scaling Factor
$\leq 0.4$	1.00	$\leq 0.4$	1.25
0.5	0.95	0.5	1.20
0.6	0.90	0.6	1.15
0.7	0.86	0.7	1.10
0.8	0.83	$> 0.7$	1.00
0.9	0.75		
0.95	0.70		
1	0.65		


**Note:** To determine % Transient Voltage Dip or Voltage Rise at various PF, multiply the % Voltage Dip from the curve directly by the Scaling Factor.

# STAMFORD®

## S7L1D-D4 & S7L1W-D4 (Industrial) Wdg.26

### Three-phase Short Circuit Decrement Curve - Separately Excited

**50Hz**

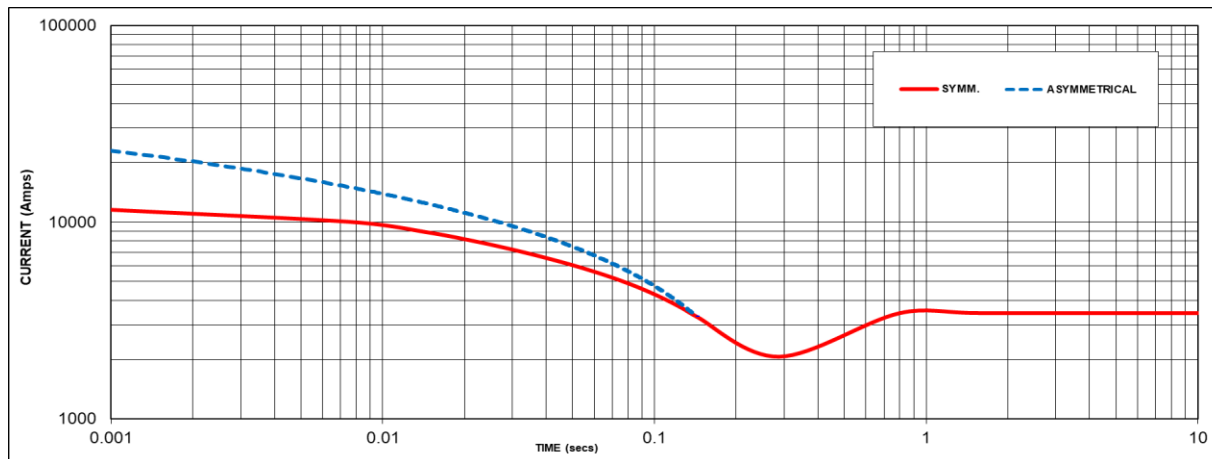

Sustained Short Circuit = 3451 Amps

#### Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
660V	X 1.00	-	-
690V	X 1.05	-	-
-	-	-	-
-	-	-	-

The sustained current value is constant irrespective of voltage level

If MX322 or digital AVR is used, the sustained short-circuit current value is to be multiplied by a factor of 1.2.

#### Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

#### Note 3

All other times are unchanged

Curves are drawn for Star connections under no-load excitation at rated speeds. For other connection (where applicable) the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2


Series Delta = Curve current value X 1.732

# STAMFORD®

## S7L1D-D4 & S7L1W-D4 (Industrial) Wdg.26

### Typical Alternator Operating Charts

**690V/50Hz**

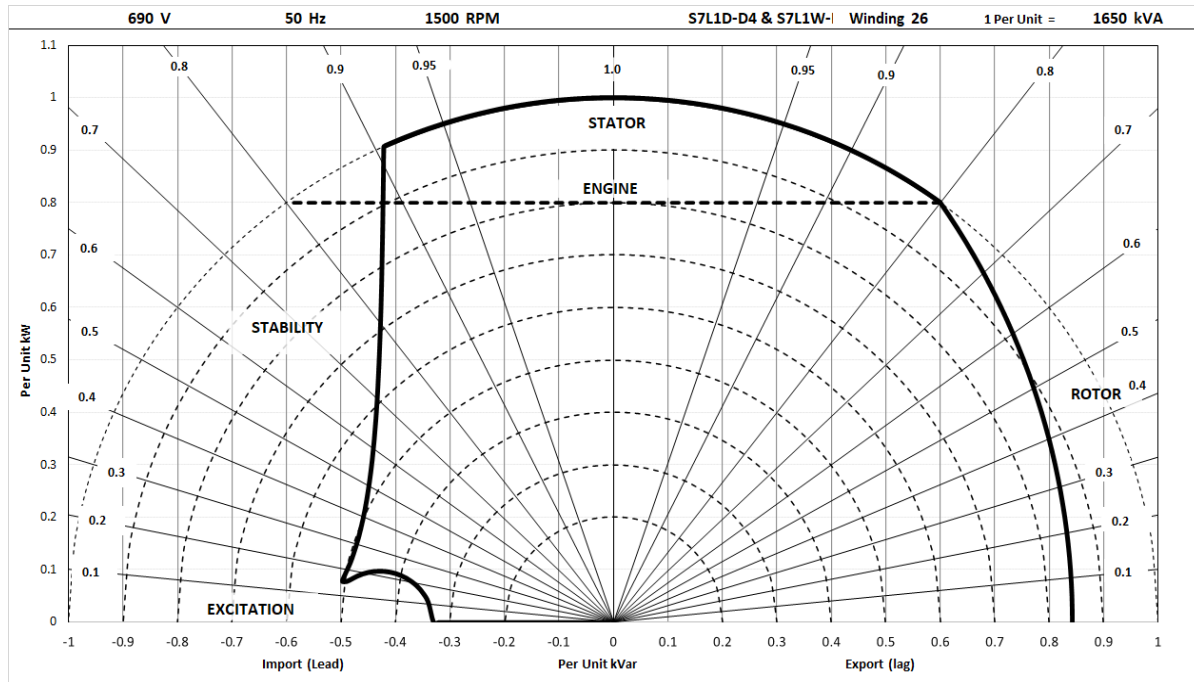

# STAMFORD®

## S7L1D-D4 & S7L1W-D4 (Industrial) Wdg.26

### RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C		Standby - 150/40°C		Cont. H - 125/40°C		Cont. F - 105/40°C	
<b>50</b> Hz	Star (V)	660	690	660	690	660	690	660	690
	Parallel Star (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Delta (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	kVA	1770	1770	1720	1720	1650	1650	1535	1535
	kW	1416	1416	1376	1376	1320	1320	1228	1228
	Efficiency (%)	95.5	95.7	95.6	95.7	95.7	95.8	95.9	95.9
	kW Input	1482	1480	1439	1438	1379	1378	1281	1280

<b>60</b> Hz	Star (V)	N/A	N/A	N/A	N/A
	Parallel Star (V)	N/A	N/A	N/A	N/A
	Delta (V)	N/A	N/A	N/A	N/A
	kVA	N/A	N/A	N/A	N/A
	kW	N/A	N/A	N/A	N/A
	Efficiency (%)	N/A	N/A	N/A	N/A
	kW Input	N/A	N/A	N/A	N/A

**Note:**

For S7L1W industrial application, ratings above are applicable for water inlet temperature up to 25°C.

Ratings are subject to the following reduction:

- 3% for every 5°C by which the water inlet temperature exceeds 25°C, up to maximum 38°C

Standby (163/27°C) ratings are not applicable for S7L1W.

**De-rates**

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C @ Class H temperature rise (not applicable to S7L1W)
- For marine alternators (IP23), 3% for every 5°C by which the operational ambient temperature exceeds 50°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters (for <690V) or 1500 meters (for >690V) must be referred to applications.

**Dimensional and Torsional Drawing**

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

**Note:** Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.





Follow us @stamfordavk



Cummins Generator Technologies



View our videos at [youtube.com/stamfordavk](https://youtube.com/stamfordavk)

[stamford-avk.com](https://stamford-avk.com)

**For Applications Support:**  
**[applications@cummins.com](mailto:applications@cummins.com)**

**For Customer Service:**  
**[emea.service@cummins.com](mailto:emea.service@cummins.com)**

**For General Enquiries:**  
**[Stamford-avk@cummins.com](mailto:Stamford-avk@cummins.com)**

Copyright 2021. Cummins Generator Technologies Ltd. All rights reserved.  
Cummins and the Cummins logo are registered trade marks of Cummins Inc.  
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

