

# STAMFORD®


## S9M1D-A4 Wdg.851 - Technical Data Sheet

### Standards

STAMFORD industrial alternators meet the requirements of the relevant parts of the IEC 60034 and the relevant sections of other international standards such as BS5000-3, ISO 8528-3, VDE 0530, NEMA MG1-32, CSA C22.2-100 and AS 60034. Other standards and certifications can be considered on request.

### Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

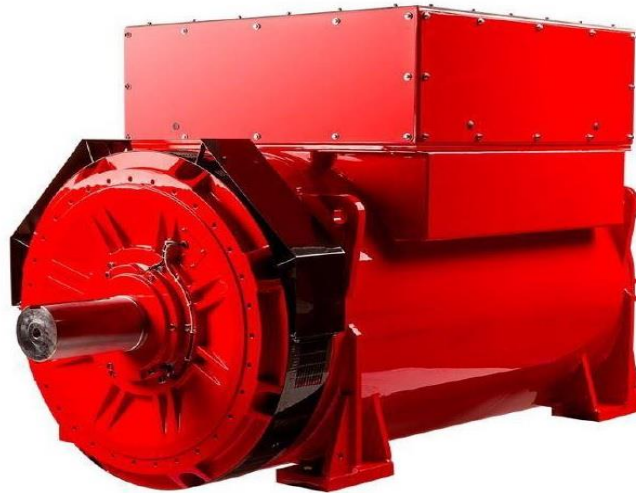

### Excitation and Voltage Regulators

Excitation System					
AVR Type	DM110	DECS100	DECS150		
Voltage Regulation	± 0.25%	± 0.25%	± 0.25%		with 4% Engine Governing
AVR Power	PMG	PMG	PMG		

No Load Excitation Voltage (V)	9.1 - 9.5
No Load Excitation Current (A)	0.83 - 0.86
Full Load Excitation Voltage (V)	36.9
Full Load Excitation Current (A)	3.36
Exciter Time Constant (seconds)	0.34

# STAMFORD

## S9M1D-A4 Wdg.851

Electrical Data		
Insulation System	H	
Stator Winding	Double Layer Lap	
Winding Pitch	2/3	
Winding Leads	6	
Winding Number	851	
Number of Poles	4	
IP Rating	IP23	
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others	
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%	
Short Circuit Ratio	1/Xd	
Steady State X/R Ratio	29.50	
50 Hz		60 Hz
Telephone Interference	THF<2%	TIF<50
Cooling Air Flow	2.78 m <sup>3</sup> /sec	3.33 m <sup>3</sup> /sec
Voltage Series Star (V)	3300	4160
Voltage Parallel Star (V)	-	-
Voltage Delta (V)	-	-
kVA Base Rating (Class H) for Reactance Values (kVA)	1800	2300
Saturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	2.676	2.582
X'd Dir. Axis Transient	0.312	0.301
X''d Dir. Axis Subtransient	0.199	0.192
Xq Quad. Axis Reactance	1.263	1.219
X''q Quad. Axis Subtransient	0.324	0.313
XL Stator Leakage Reactance	0.179	0.173
X2 Negative Sequence Reactance	0.298	0.288
X0 Zero Sequence Reactance	0.139	0.134
Unsaturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	3.211	3.098
X'd Dir. Axis Transient	0.359	0.346
X''d Dir. Axis Subtransient	0.233	0.225
Xq Quad. Axis Reactance	1.301	1.255
X''q Quad. Axis Subtransient	0.389	0.375
XL Stator Leakage Reactance	0.202	0.195
Xlr Rotor Leakage Reactance	0.271	0.261
X2 Negative Sequence Reactance	0.358	0.345
X0 Zero Sequence Reactance	0.163	0.157

# STAMFORD®

## S9M1D-A4 Wdg.851


<b>Time Constants (Seconds)</b>		
T'd Transient Time Const.	0.259	
T''d Sub-Transient Time Const.	0.020	
T'do O.C. Field Time Const.	2.340	
Ta Armature Time Const.	0.038	
T''q Sub-Transient Time Const.	0.0250	
<b>Resistances in Ohms (<math>\Omega</math>) at 22<sup>o</sup>C</b>		
Stator Winding Resistance (Ra), per phase for series connected	0.0618	
Rotor Winding Resistance (Rf)	0.48	
Exciter Stator Winding Resistance	9.8	
Exciter Rotor Winding Resistance per phase	0.014	
PMG Phase Resistance (Rpmg) per phase	3.8	
Positive Sequence Resistance (R1)	0.0773	
Negative Sequence Resistance (R2)	0.0890	
Zero Sequence Resistance (R0)	0.0773	
<b>Saturation Factors</b>	<b>3300V</b>	<b>4160V</b>
SG1.0	0.176	0.178
SG1.2	0.854	0.862
<b>Mechanical Data</b>		
Shaft and Keys	All alternator rotors are dynamically balanced to better than ISO 21940-11 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearing
SAE Adaptor	0, 00	0, 00, None
Moment of Inertia	65.8 kgm <sup>2</sup>	63.7 kgm <sup>2</sup>
Weight Wound Stator	1500kg	1500kg
Weight Wound Rotor	1686kg	1614kg
Weight Complete Alternator	4800kg	4800kg
Shipping weight in a Crate	5150kg	5150kg
Packing Crate Size	160 x 200 x 220(cm)	160 x 200 x 220(cm)
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	-	6232
Bearing Non-Drive End	6324	6324

# STAMFORD®


S9M1D-A4 Wdg.851

## THREE PHASE EFFICIENCY CURVES

50Hz

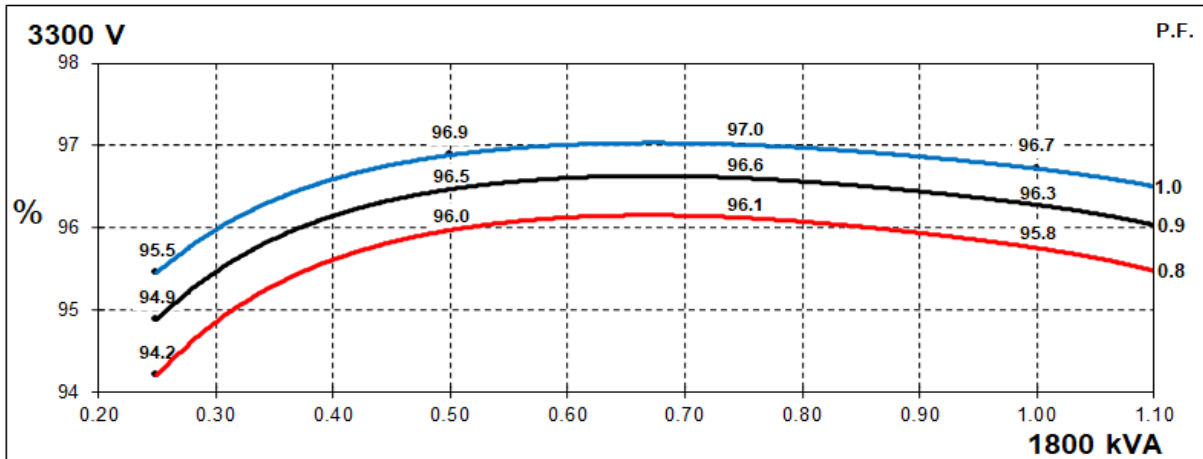

60Hz

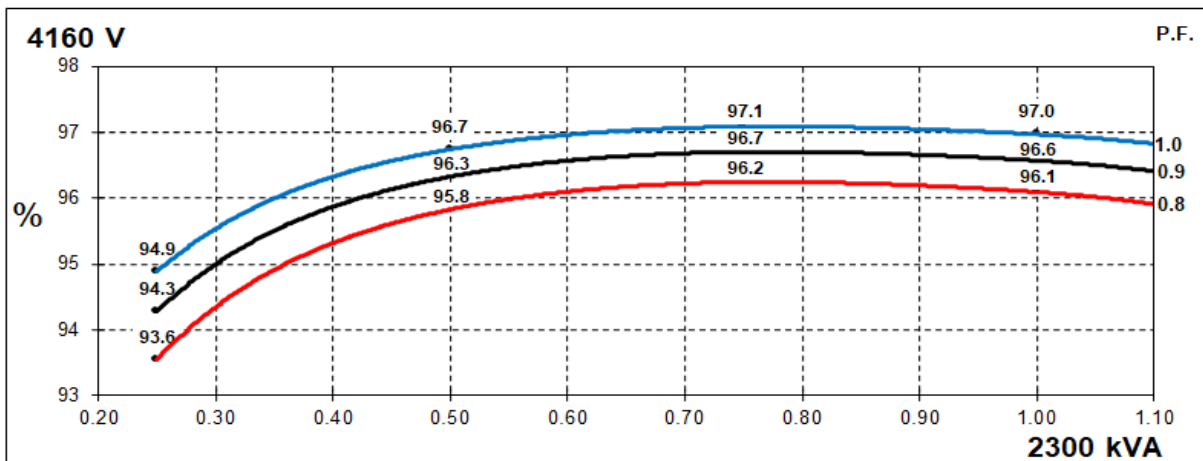


# STAMFORD®


## S9M1D-A4 Wdg.851

### Locked Rotor Motor Starting Curves - Separately Excited

**50Hz**

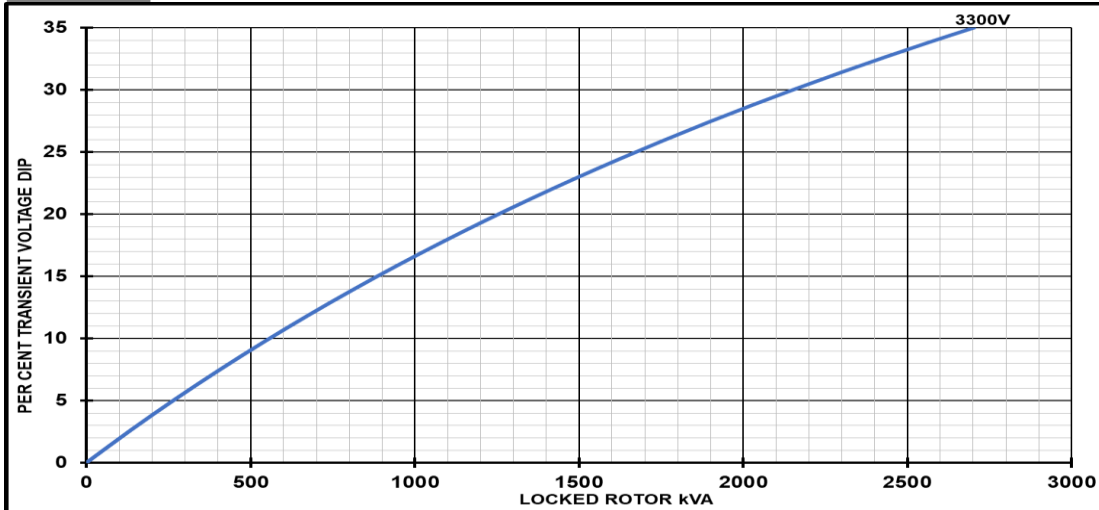

**60Hz**

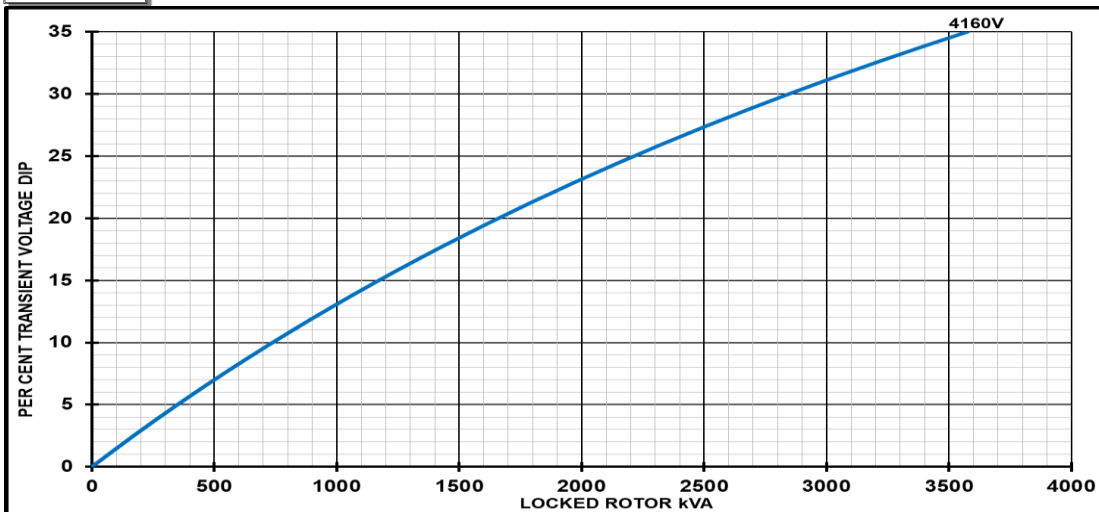

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor	
Lagging PF	Scaling Factor	Lagging PF	Scaling Factor
<= 0.4	1.00	<= 0.4	1.25
0.5	0.95	0.5	1.20
0.6	0.90	0.6	1.15
0.7	0.86	0.7	1.10
0.8	0.83	> 0.7	1.00
0.9	0.75		
0.95	0.70		
1	0.65		


**Note:** To determine % Transient Voltage Dip or Voltage Rise at various PF, multiply the % Voltage Dip from the curve directly by the Scaling Factor.

# STAMFORD<sup>®</sup>

## S9M1D-A4 Wdg.851


### Three-phase Short Circuit Decrement Curve - Separately Excited

**50Hz**

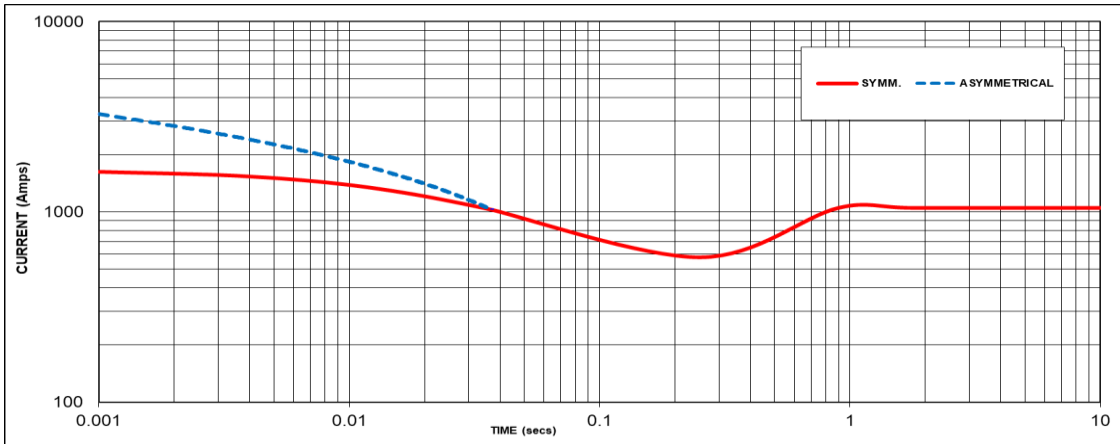

Sustained Short Circuit = 1040 Amps

**60Hz**

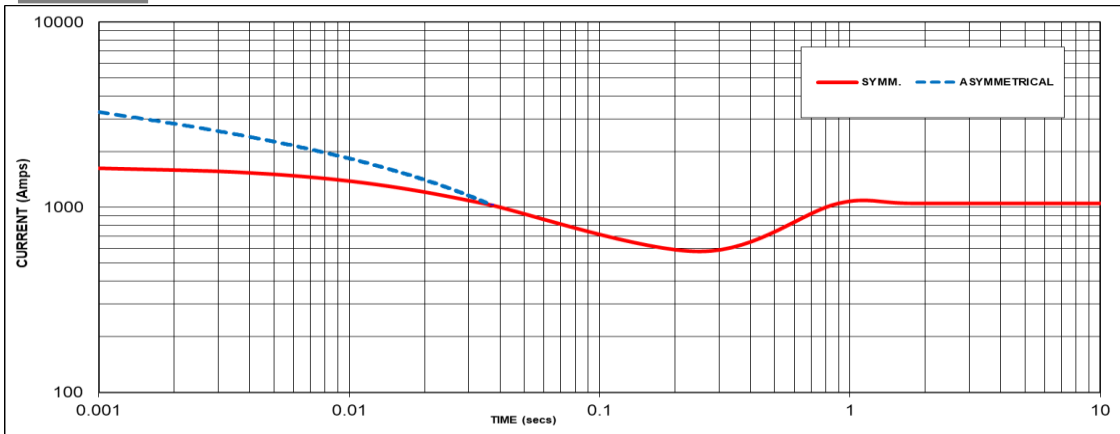

Sustained Short Circuit = 1054 Amps

**Note 1**

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
3300V	X 1.00	4160V	X 1.00
-	-	-	-
-	-	-	-
-	-	-	-

The sustained current value is constant irrespective of voltage level

**Note 2**

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

**Note 3**

All other times are unchanged

Curves are drawn for Star connections under no-load excitation at rated speeds. For other connection (where applicable) the following multipliers should be applied to current values as shown :


- Parallel Star = Curve current value X 2
- Series Delta = Curve current value X 1.732

# STAMFORD


S9M1D-A4 Wdg.851

## Typical Alternator Operating Charts

**3300V/50Hz**

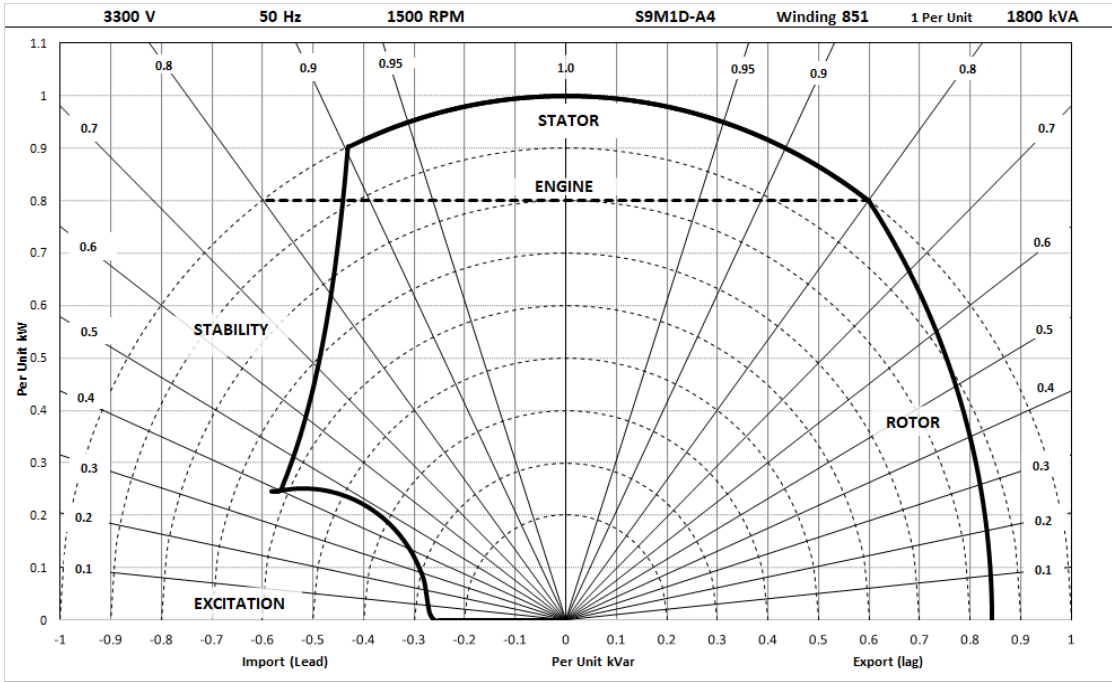

**4160V/60Hz**

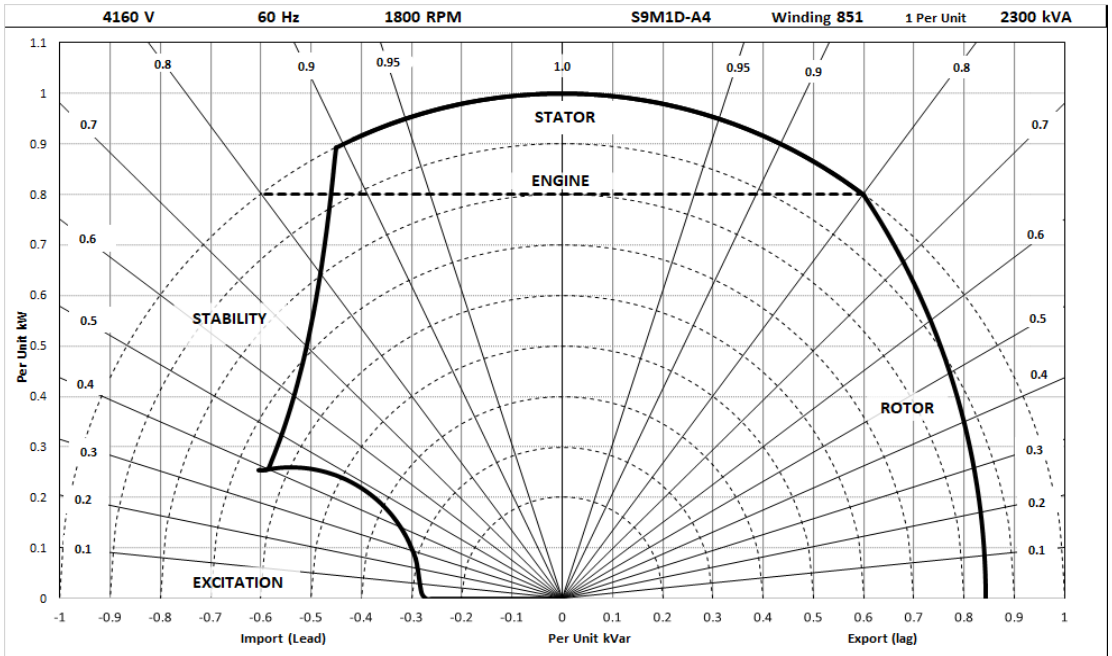

# STAMFORD®

## S9M1D-A4 Wdg.851

### RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C	Standby - 150/40°C	Cont. H - 125/40°C	Cont. F - 105/40°C
<b>50</b> Hz	Star (V)	3300	3300	3300	3300
	Parallel Star (V)	N/A	N/A	N/A	N/A
	Delta (V)	N/A	N/A	N/A	N/A
	kVA	1980	1926	1800	1656
	kW	1584	1541	1440	1325
	Efficiency (%)	95.5	95.6	95.8	95.9
	kW Input	1659	1612	1504	1381

<b>60</b> Hz	Star (V)	4160	4160	4160	4160
	Parallel Star (V)	N/A	N/A	N/A	N/A
	Delta (V)	N/A	N/A	N/A	N/A
	kVA	2530	2461	2300	2116
	kW	2024	1969	1840	1693
	Efficiency (%)	95.9	96.0	96.1	96.2
	kW Input	2110	2051	1915	1760

#### De-rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C @ Class H temperature rise (please refer to applications for ambient temperature de-rates at other temperature rise classes)
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters (for <690V) or 1500 meters (for >690V) must be referred to applications.

#### Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

**Note:** Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.





Follow us @stamfordavk



Cummins Generator Technologies



View our videos at [youtube.com/stamfordavk](https://youtube.com/stamfordavk)

[stamford-avk.com](https://stamford-avk.com)

**For Applications Support:  
[applications@cummins.com](mailto:applications@cummins.com)**

**For Customer Service:  
[emea.service@cummins.com](mailto:emea.service@cummins.com)**

**For General Enquiries:  
[Stamford-avk@cummins.com](mailto:Stamford-avk@cummins.com)**

Copyright 2020. Cummins Generator Technologies Ltd. All rights reserved.  
Cummins and the Cummins logo are registered trade marks of Cummins Inc.  
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

