

A7L1D-K6 Wdg.412 - Technical Data Sheet

Standards

STAMFORD | AvK industrial alternators meet the requirements of the relevant parts of the IEC 60034 and the relevant sections of other international standards such as BS5000-3, ISO 8528-3, VDE 0530, NEMA MG1-32, CSA C22.2-100 and AS 60034. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System					
AVR Type	DECS150	DECS100	DM110		
Voltage Regulation	± 0.25%	± 0.25%	± 0.25%		with 4% Engine Governing
AVR Power	PMG	PMG	PMG		

No Load Excitation Voltage (V)	28.70 - 27.30
No Load Excitation Current (A)	1.33 - 1.27
Full Load Excitation Voltage (V)	95
Full Load Excitation Current (A)	3.7
Exciter Time Constant (seconds)	0.251

STAMFORD | AvK

A7L1D-K6 Wdg.412

Electrical Data								
Insulation System	H							
Stator Winding	Double Layer Concentric							
Winding Pitch	5/6							
Winding Leads	6							
Winding Number	412							
Number of Poles	6							
IP Rating	IP23							
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others							
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
Short Circuit Ratio	1/Xd							
Steady State X/R Ratio	27.45							
50 Hz					60 Hz			
Telephone Interference	THF<2%				TIF<50			
Cooling Air Flow	2.07 m³/sec				2.48 m³/sec			
Voltage Star (V)	380	400	415	N/A	416	440	460	480
Voltage Parallel Star (V)	-	-	-	-	-	-	-	-
Voltage Delta (V)	-	-	-	-	-	-	-	-
kVA Base Rating (Class H) for Reactance Values (kVA)	2035	2100	2100	N/A	2188	2313	2413	2519
Saturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	1.65	1.54	1.43	-	1.78	1.68	1.61	1.54
X'd Dir. Axis Transient	0.14	0.13	0.12	-	0.15	0.15	0.14	0.13
X''d Dir. Axis Subtransient	0.10	0.10	0.09	-	0.11	0.11	0.10	0.10
Xq Quad. Axis Reactance	1.52	1.42	1.31	-	1.64	1.55	1.48	1.41
X''q Quad. Axis Subtransient	0.18	0.17	0.16	-	0.19	0.18	0.17	0.17
XL Stator Leakage Reactance	0.16	0.15	0.14	-	0.17	0.16	0.15	0.15
X2 Negative Sequence Reactance	0.14	0.13	0.12	-	0.15	0.15	0.14	0.13
X0 Zero Sequence Reactance	0.10	0.10	0.09	-	0.11	0.11	0.10	0.10
Unsaturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	1.98	1.85	1.72	-	2.14	2.02	1.93	1.85
X'd Dir. Axis Transient	0.17	0.15	0.14	-	0.18	0.17	0.16	0.15
X''d Dir. Axis Subtransient	0.12	0.11	0.10	-	0.13	0.12	0.12	0.11
Xq Quad. Axis Reactance	1.56	1.46	1.35	-	1.68	1.59	1.52	1.46
X''q Quad. Axis Subtransient	0.22	0.20	0.19	-	0.23	0.22	0.21	0.20
XL Stator Leakage Reactance	0.18	0.16	0.15	-	0.19	0.18	0.17	0.16
Xlr Rotor Leakage Reactance	0.12	0.11	0.10	-	0.13	0.12	0.11	0.11
X2 Negative Sequence Reactance	0.17	0.16	0.15	-	0.19	0.18	0.17	0.16
X0 Zero Sequence Reactance	0.12	0.11	0.11	-	0.13	0.12	0.12	0.11

STAMFORD | AvK

A7L1D-K6 Wdg.412


Time Constants (Seconds)		
T'd Transient Time Const.	0.119	
T''d Sub-Transient Time Const.	0.014	
T'do O.C. Field Time Const.	3.020	
Ta Armature Time Const.	0.021	
T''q Sub-Transient Time Const.	0.0268	
Resistances in Ohms (Ω) at 22°C		
Stator Winding Resistance (Ra), per phase for series connected	0.00077	
Rotor Winding Resistance (Rf)	3.997	
Exciter Stator Winding Resistance	21	
Exciter Rotor Winding Resistance per phase	0.156	
PMG Phase Resistance (Rpmg) per phase	4.11	
Positive Sequence Resistance (R1)	0.0010	
Negative Sequence Resistance (R2)	0.0011	
Zero Sequence Resistance (R0)	0.0010	
Saturation Factors	400V	480V
SG1.0	0.389	0.439
SG1.2	1.713	1.838
Mechanical Data		
Shaft and Keys	All alternator rotors are dynamically balanced to better than ISO 21940-11 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearing
SAE Adaptor	-	SAE0,00
Moment of Inertia	-	86 kgm ²
Weight Wound Stator	-	1418kg
Weight Wound Rotor	-	1585kg
Weight Complete Alternator	-	4721kg
Shipping weight in a Crate	-	4971kg
Packing Crate Size	-	230*115*155(cm)
Maximum Over Speed	1500 RPM for two minutes	
Bearing Drive End	-	BALL 6232
Bearing Non-Drive End	-	BALL 6324

STAMFORD | AvK







A7L1D-K6 Wdg.412

THREE PHASE EFFICIENCY CURVES

50Hz

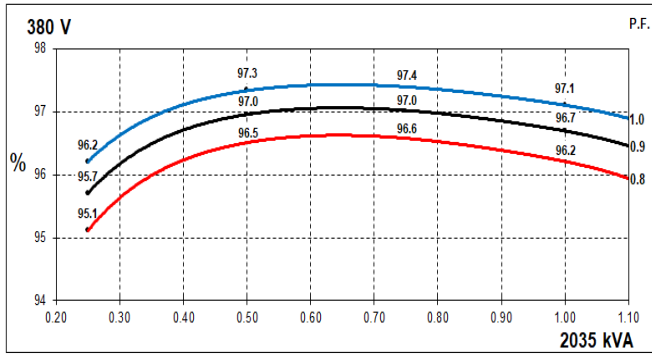

60Hz

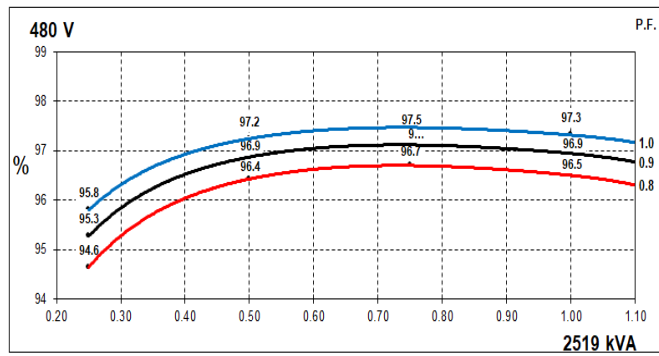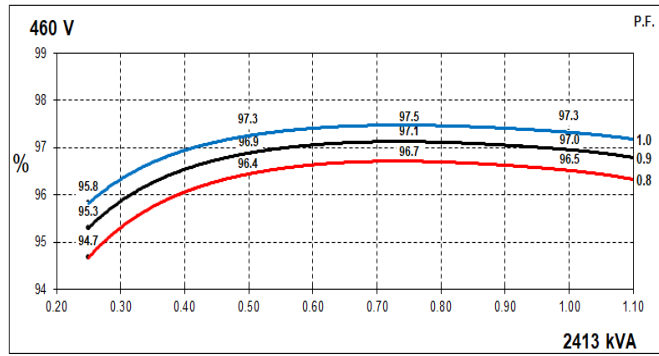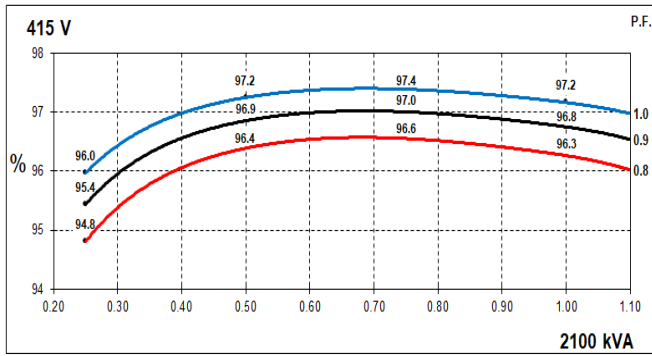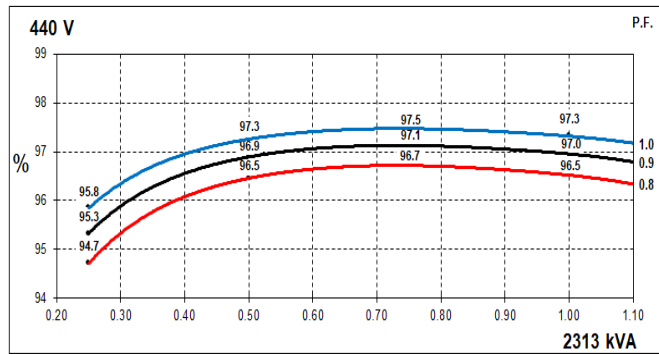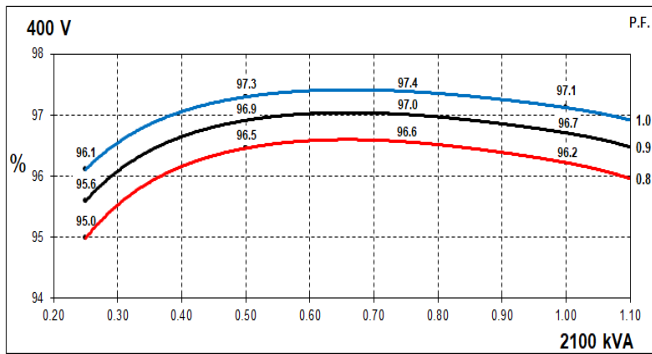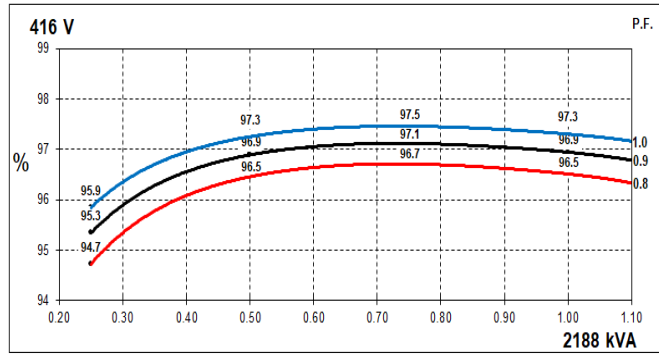


STAMFORD | AvK


A7L1D-K6 Wdg.412

Locked Rotor Motor Starting Curves - Separately Excited

50Hz

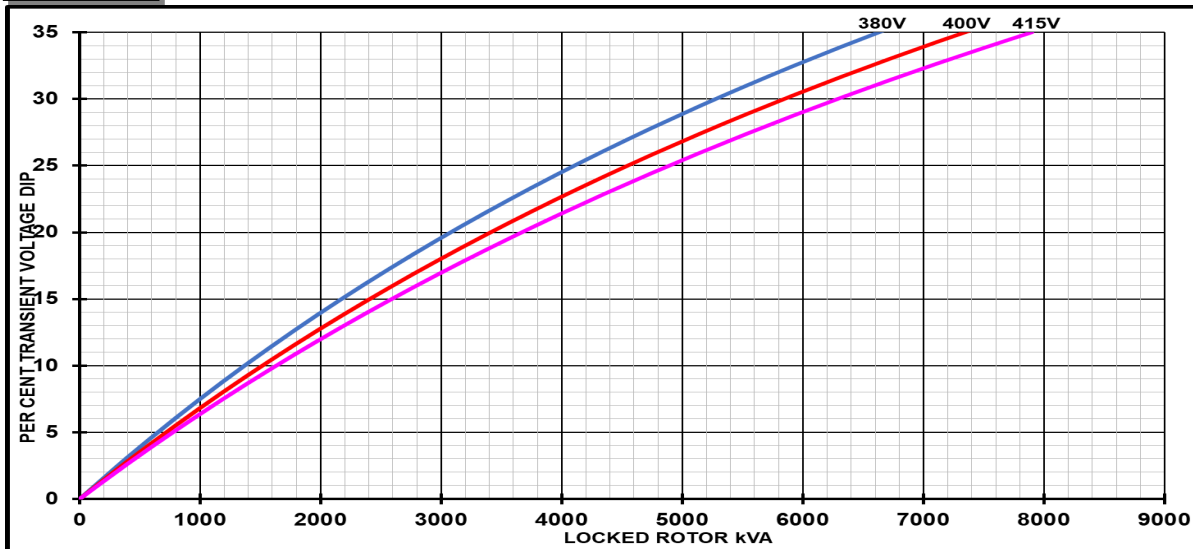

60Hz

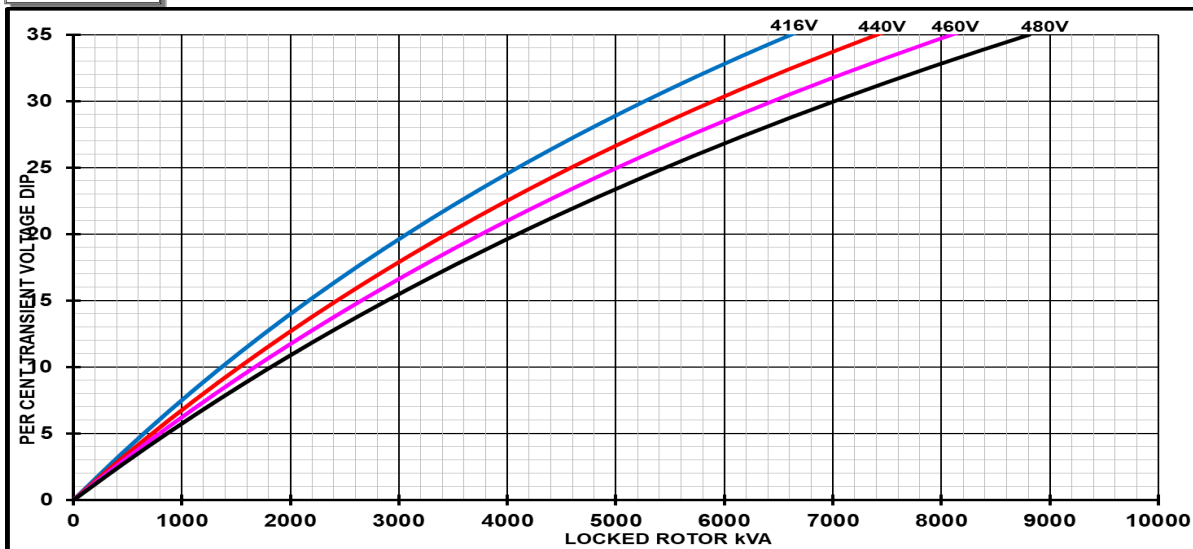

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor	
Lagging PF	Scaling Factor	Lagging PF	Scaling Factor
<= 0.4	1.00	<= 0.4	1.25
0.5	0.95	0.5	1.20
0.6	0.90	0.6	1.15
0.7	0.86	0.7	1.10
0.8	0.83	> 0.7	1.00
0.9	0.75		
0.95	0.70		
1	0.65		


Note: To determine % Transient Voltage Dip or Voltage Rise at various PF, multiply the % Voltage Dip from the curve directly by the Scaling Factor.

STAMFORD | AvK

A7L1D-K6 Wdg.412


Three-phase Short Circuit Decrement Curve - Separately Excited

50Hz

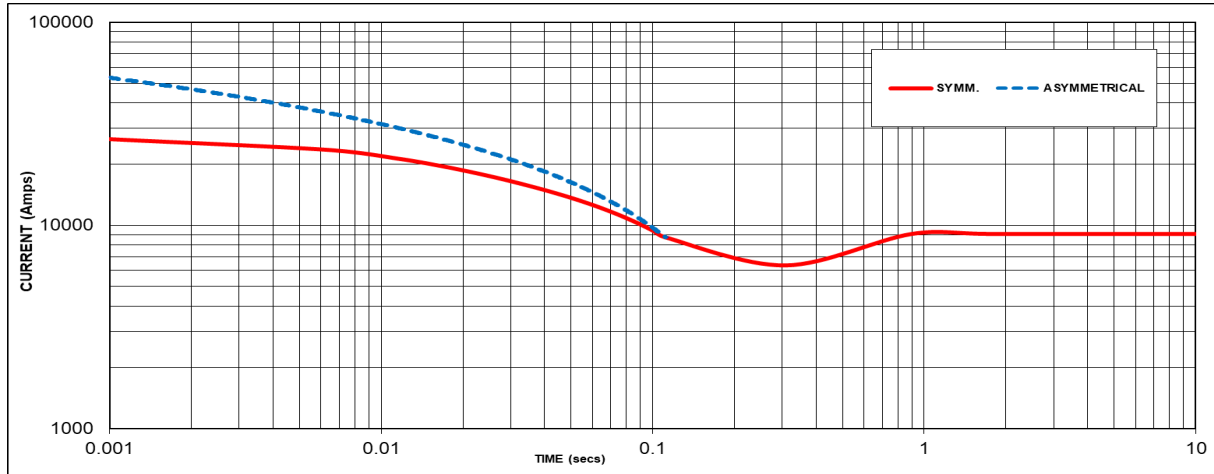

Sustained Short Circuit = 7470 Amps

60Hz

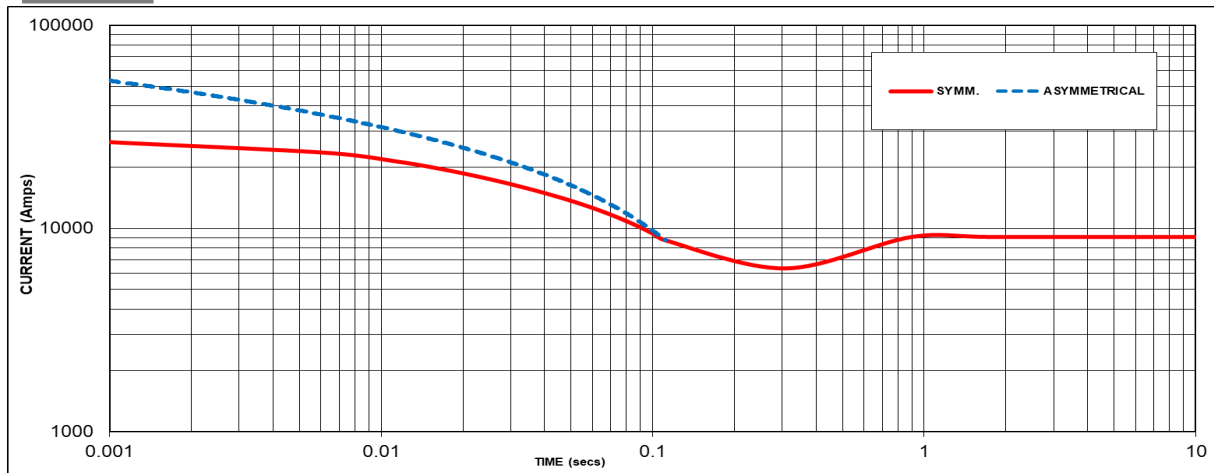

Sustained Short Circuit = 9080 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380V	X 1.00	416V	X 1.00
400V	X 1.07	440V	X 1.06
415V	X 1.12	460V	X 1.12
N/AV	X 1.18	480V	X 1.17

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

Note 3

All other times are unchanged

Curves are drawn for Star connections under no-load excitation at rated speeds. For other connection (where applicable) the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2


Series Delta = Curve current value X 1.732

STAMFORD | AvK


A7L1D-K6 Wdg.412

Typical Alternator Operating Charts

400V/50Hz

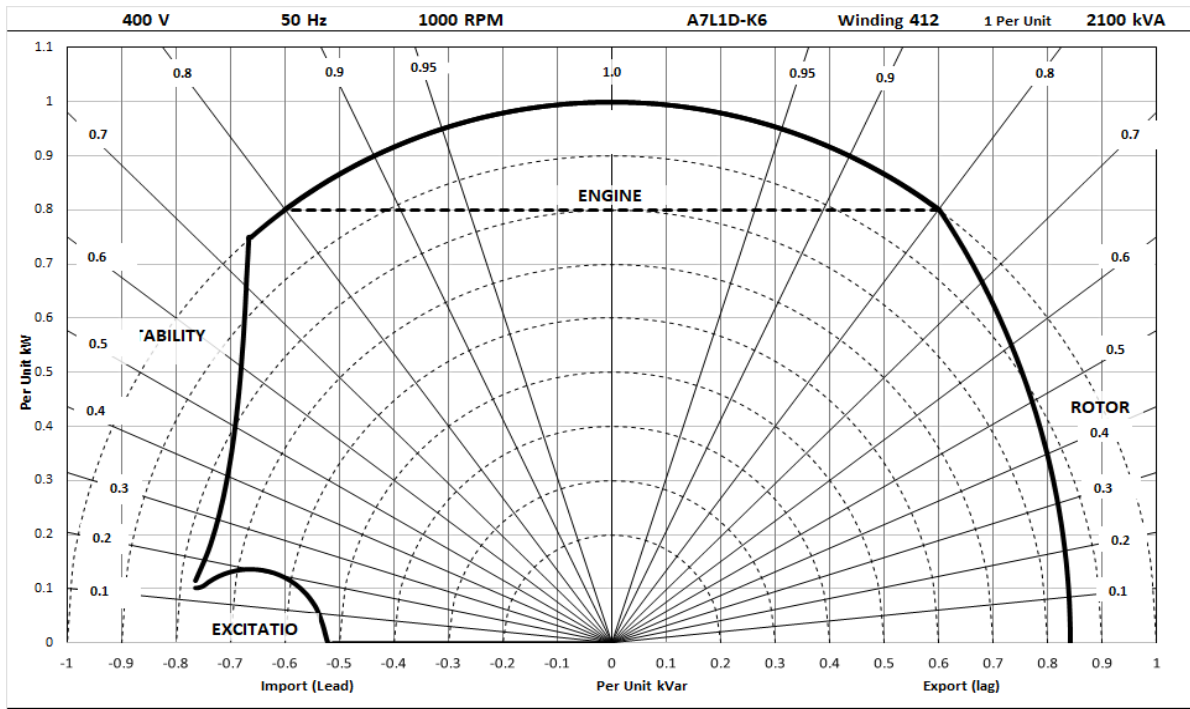

480V/60Hz

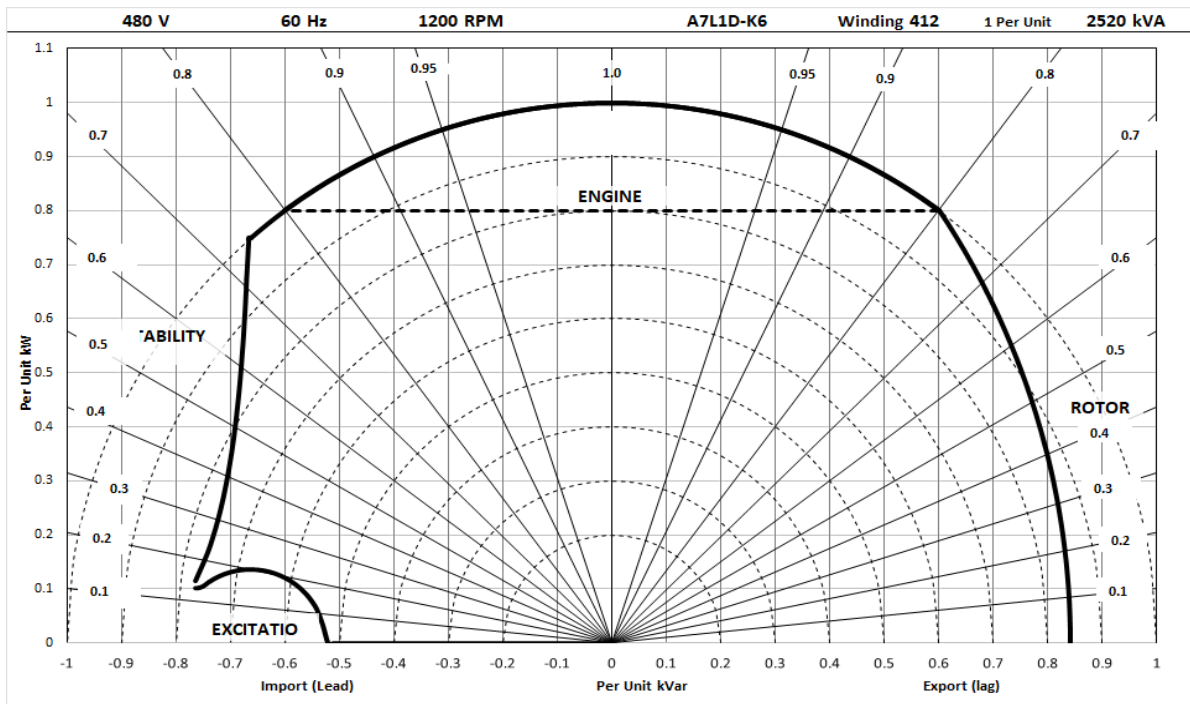

STAMFORD | AvK

A7L1D-K6 Wdg.412

RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C				Standby - 150/40°C				Cont. H - 125/40°C				Cont. F - 105/40°C			
50 Hz	Star (V)	380	400	415	N/A	380	400	415	N/A	380	400	415	N/A	380	400	415	N/A
	Parallel Star (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Delta (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	kVA	2185	2250	2250	N/A	2120	2185	2185	N/A	2035	2100	2100	N/A	1835	1890	1890	N/A
	kW	1748	1800	1800	N/A	1696	1748	1748	N/A	1628	1680	1680	N/A	1468	1512	1512	N/A
	Efficiency (%)	96.0	96.1	96.1	N/A	96.1	96.1	96.2	N/A	96.2	96.2	96.3	N/A	96.4	96.4	96.4	N/A
	kW Input	1820	1874	1873	N/A	1765	1818	1817	N/A	1692	1746	1745	N/A	1523	1568	1568	N/A

60 Hz	Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Delta (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	kVA	2356	2481	2588	2700	2275	2406	2519	2619	2188	2313	2413	2519	1963	2075	2169	2269
	kW	1885	1985	2070	2160	1820	1925	2015	2095	1750	1850	1930	2015	1570	1660	1735	1815
	Efficiency (%)	96.4	96.4	96.4	96.4	96.5	96.5	96.4	96.4	96.5	96.5	96.5	96.5	96.6	96.6	96.6	96.6
	kW Input	1955	2059	2148	2241	1887	1995	2089	2173	1814	1917	2000	2088	1625	1718	1796	1879

De-rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C @ Class H temperature rise (please refer to applications for ambient temperature de-rates at other temperature rise classes)
- For marine alternators, 3% for every 5°C by which the operational ambient temperature exceeds 50°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters (for <690V) or 1500 meters (for >690V) must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

stamford-avk.com

For Applications Support:
applications@cummins.com

For Customer Service:
emea.service@cummins.com

For General Enquiries:
Stamford-avk@cummins.com

Copyright 2025. Cummins Generator Technologies Ltd. All rights reserved.
Cummins and the Cummins logo are registered trade marks of Cummins Inc.
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

