

STAMFORD®

S0L2M-G Winding 06 / 706

S0L2M-G - Technical Data Sheet

Standards

Stamford industrial alternators meet the requirements of IEC EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System	
AVR Type	AVR Power
AS540	Self-Excited / Aux winding
Voltage Regulation	± 1%
No Load Excitation Voltage (V)	12 V
Full Load Excitation Voltage (V)	48 V

STAMFORD®

S0L2M-G Winding 06 / 706

Electrical Data		
Insulation System	Class H	
Stator Winding	Double Layer Concentric	
Winding Pitch	Two Thirds	
Winding Leads	4	
Winding Number	06 / 706	
Number of Poles	4	
IP Rating	IP23	
RFI Suppression	EN 61000-6-2 & EN 61000-6-4, refer to factory for others	
Waveform Distortion	NO LOAD < 2.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%	
Short Circuit Ratio	1/Xd	
Steady State X/R Ratio	4.34	
	60 Hz	
Telephone Interference	TIF<75	
Voltage Series/ Voltage Parallel	240/120	240/120
Power Factor	0.8	1.0
kVA Base Rating (Class H)	12.8	13.8
Saturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	0.830	0.895
X'd Dir. Axis Transient	0.096	0.104
X''d Dir. Axis Subtransient	0.095	0.103
Xq Quad. Axis Reactance	0.736	0.794
X''q Quad. Axis Subtransient	0.123	0.132
XL Stator Leakage Reactance	0.066	0.071
X2 Negative Sequence Reactance	0.187	0.202
X0 Zero Sequence Reactance	0.063	0.068
Unsaturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	0.996	1.074
X'd Dir. Axis Transient	0.111	0.119
X''d Dir. Axis Subtransient	0.112	0.120
Xq Quad. Axis Reactance	0.758	0.818
X''q Quad. Axis Subtransient	0.147	0.159
XL Stator Leakage Reactance	0.075	0.081
X2 Negative Sequence Reactance	0.225	0.242
X0 Zero Sequence Reactance	0.073	0.079
Time Constants (Seconds)		
T'd TRANSIENT TIME CONST.	0.025	
T''d SUB-TRANSTIME CONST.	0.001	
T'do O.C. FIELD TIME CONST.	0.508	
Ta ARMATURE TIME CONST.	0.012	

STAMFORD®

S0L2M-G Winding 06 / 706



Resistances in Ohms (Ω) at 22°C		
Stator Winding Resistance (Ra)	0.141Ω per phase series connected	
Rotor Winding Resistance (Rf)	0.644Ω	
Exciter Stator Winding Resistance	14.624 Ω	
Exciter Rotor Winding Resistance	0.135 Ω per phase	
Positive Sequence Resistance (R1)	0.176 Ω	
Negative Sequence Resistance (R2)	0.203 Ω	
Zero Sequence Resistance (R0)	0.176 Ω	
Aux Winding Resistance (with winding 706 only)	2.731 Ω	
Mechanical data		
Cooling Air	0.126 m³/sec (50Hz)	
Shaft and Keys	All alternator rotors are dynamically balanced to better than ISO 21940-11 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearing
SAE Adaptor	3, 4	3, 4, None
Moment of Inertia	0.1269 kgm²	0.1272 kgm²
Weight Wound Stator	40.5kg	40.5kg
Weight Wound Rotor	36.5kg	37.5kg
Weight Complete Alternator	105kg	118kg
Shipping weight in a Crate	143kg	157g
Packing Crate Size	930 x 590 x 760(mm)	930 x 590 x 760(mm)
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	-	BALL. 6309-2RS (ISO)
Bearing Non-Drive End	Ball Bearing, 6306-2RS1	Ball Bearing, 6305-2RS1

STAMFORD®

S0L2M-G Winding 06 / 706

Single Phase Efficiency Curves

60Hz Curves

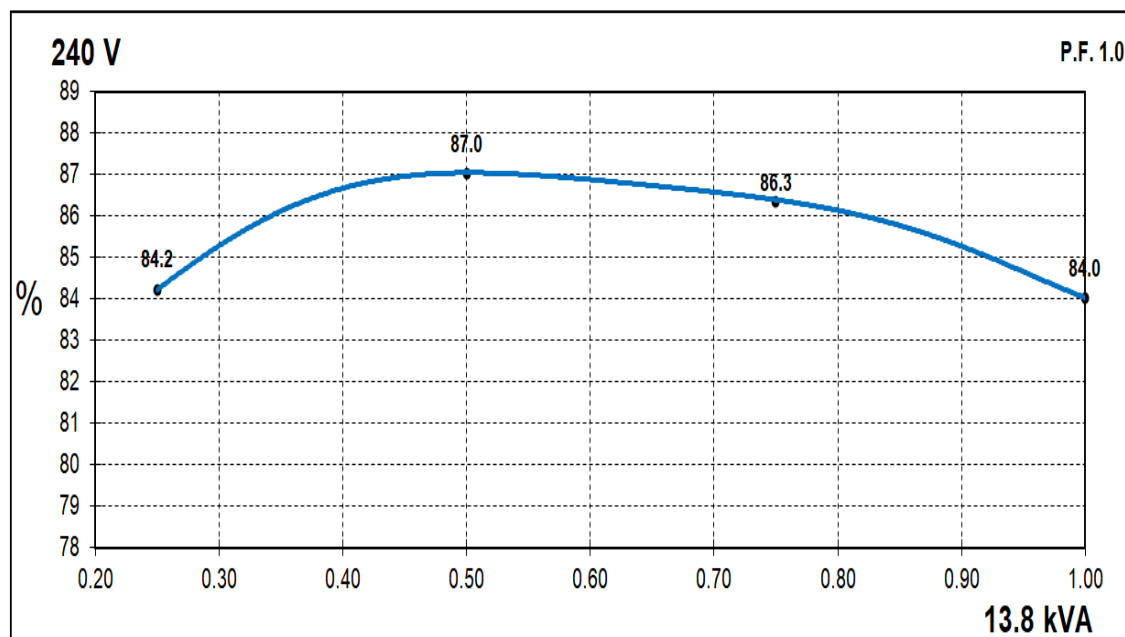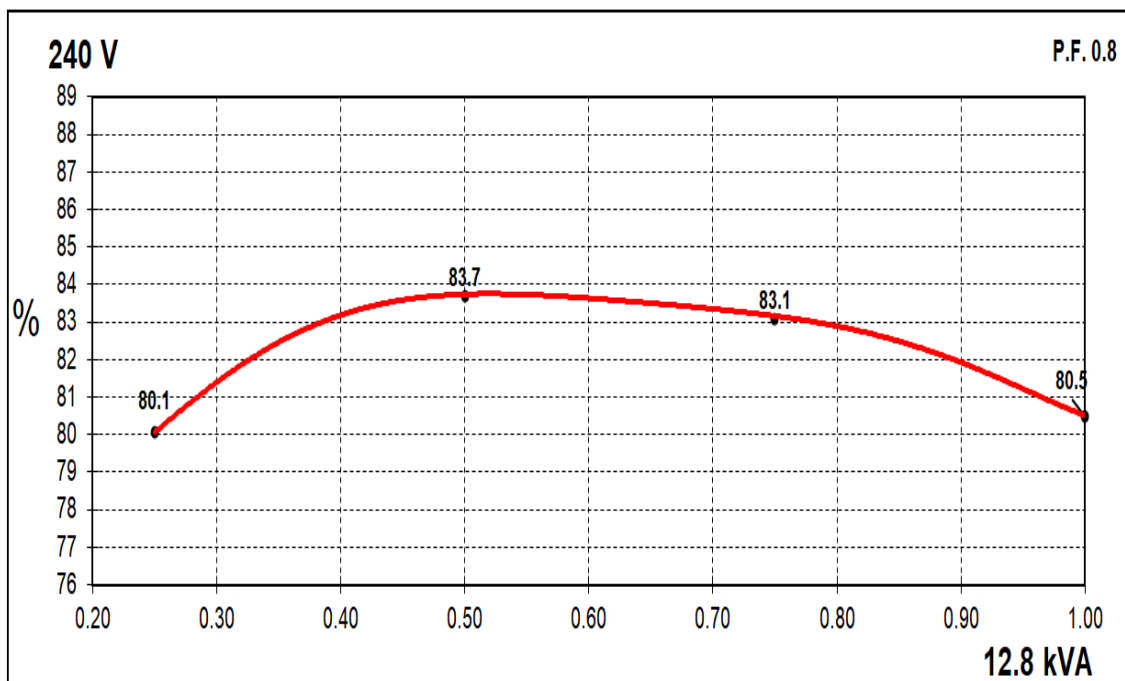


ES10462546, A.3, Released, Performance Specification, Page 5 of 9, System: cmipm.cummins.com Downloaded: 02-10-2025 11:50UTC
SUID: pm-4NXvEYgUgP0uFjUBD80ZAP19iOVX8oIfznQmjzbzhwH7QIT7iP5wnxUU_vvH8XGy6suXVt0rs0W6AUD9xw==

STAMFORD®

S0L2M-G Winding 06 / 706

Locked Rotor Motor Starting Curves


60Hz

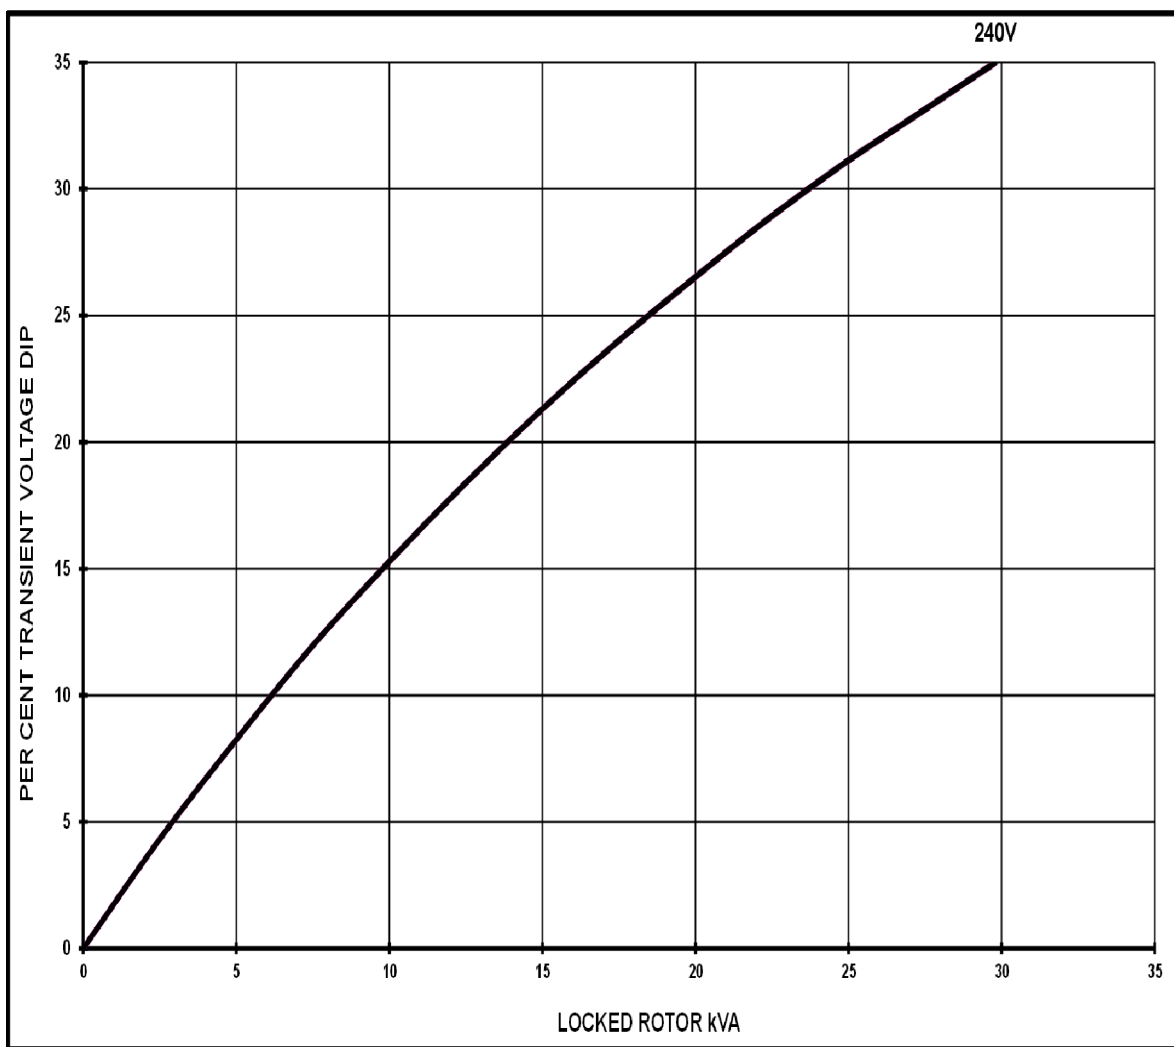

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	For voltage rise multiply voltage dip by 1.25
< 0.5	1.00	
0.5	0.97	
0.6	0.93	
0.7	0.90	
0.8	0.85	
0.9	0.83	
1.0	0.80	

STAMFORD **S0L2M-G Winding 706** **Short Circuit Decrement Curve**

Note: Applicable only for Winding 706 (Auxiliary winding).
Winding 06 (no Auxiliary winding) will not provide short circuit capability.

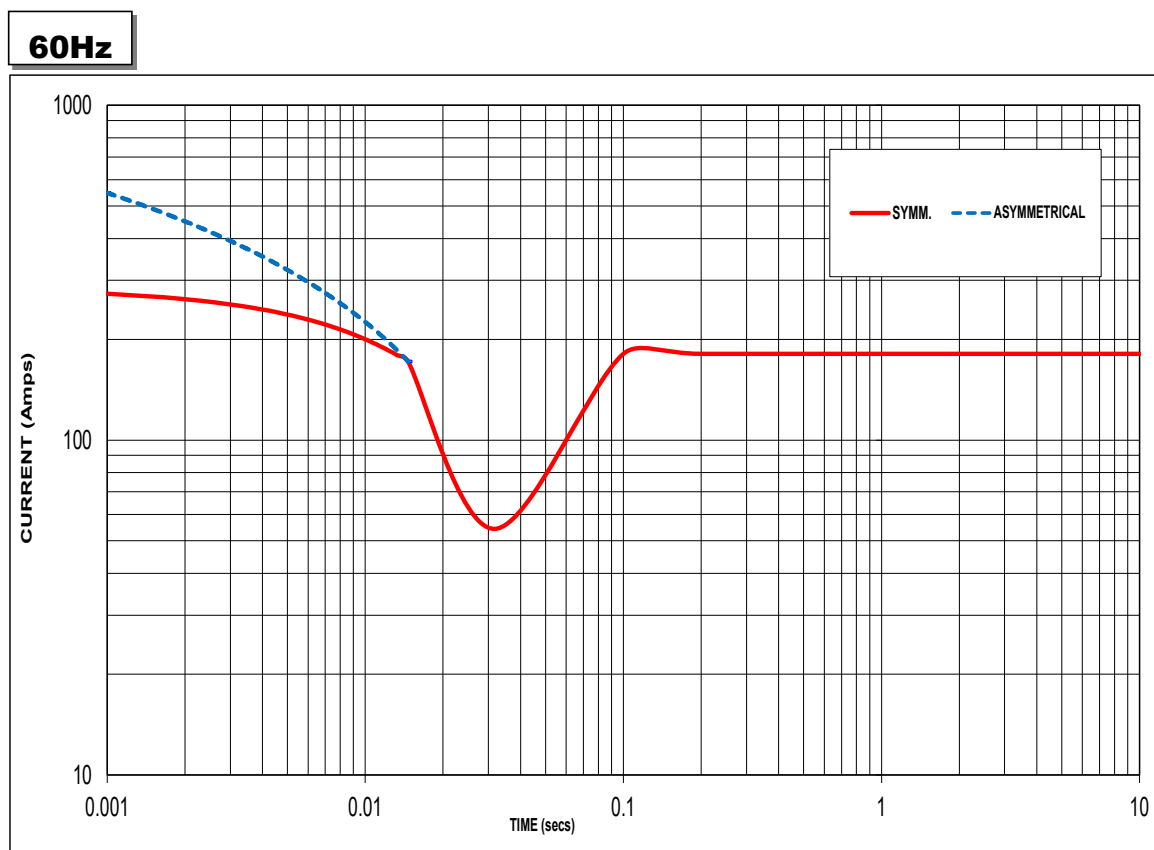


Note: The alternator is capable of delivering 300% short-circuit current for 10 seconds as per requirements specified by marine agencies.

STAMFORD®

SOL2M-G Winding 06 / 706

Typical Alternator Operating Chart

240V/60Hz

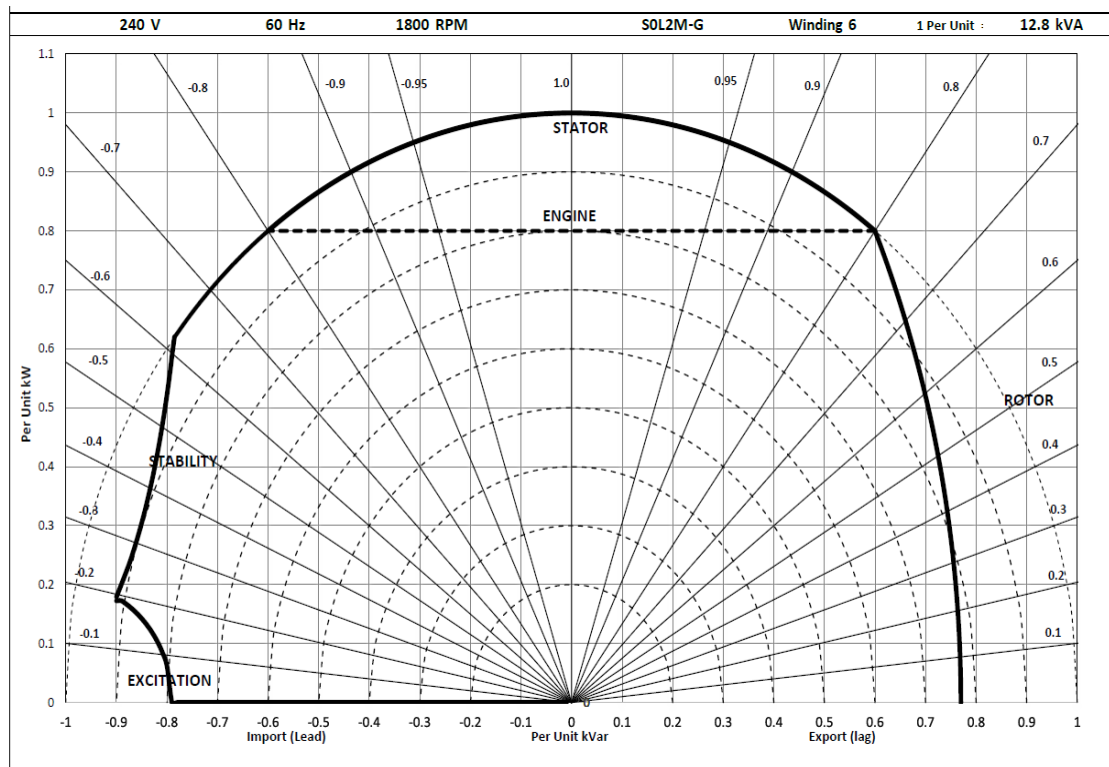

STAMFORD®

S0L2M-G Winding 06 / 706

RATINGS AT 0.8/1.0 POWER FACTOR

Class - Temp Rise		Cont. H - 110/50°C		Cont. F - 90/50°C		Cont. B - 70/50°C		Cont. E - 65/50°C	
60 Hz	Series (V)	240	240	240	240	240	240	240	240
	Parallel(V)	120	120	120	120	120	120	120	120
	Power Factor	0.8	1.0	0.8	1.0	0.8	1.0	0.8	1.0
	kVA	12.8	13.8	11.6	12.5	10.2	11.0	9.8	10.6
	kW	10.2	13.8	9.3	12.5	8.2	11.0	7.8	10.6
	Efficiency (%)	80.5	84.0	81.3	84.8	82.2	85.5	82.4	85.7
	kW Input	12.7	16.4	11.4	14.7	9.9	12.9	9.5	12.4

De-Rates

All values tabulated above are subject to the following reductions:

- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 50°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

news.stamford-avk.com

For Applications Support:
applications@cummins.com

For Customer Service:
service-engineers@stamford-avk.com

For General Enquiries:
info@cumminsgeneratortechnologies.com

Copyright 2016. Cummins Generator Technologies Ltd. All rights reserved.
Cummins and the Cummins logo are registered trade marks of Cummins Inc.
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

