

ES10462551, A.3, Released, Performance Specification, Page 1 of 9, System: cmipm.cummins.com Downloaded: 02-10-2025 11:51UTC
S1ID: dcNZ6cG0Pw44xKOjZXNxRc0ZAP1giOVX8oIfznQmjbYjCjD3jnhGx_OqWmy1BHhBXGYj6suXVr0rs0W6AUD9xw==

STAMFORD

S1L2M-K Winding 06 / 706

S1L2M-K - Technical Data Sheet

Standards

STAMFORD industrial alternators meet the requirements of IEC EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System	
AVR Type	AVR Power
AS540	Self-Excited / Aux winding
Voltage Regulation	± 1%
No Load Excitation Voltage (V)	13 V
Full Load Excitation Voltage (V)	46 V

STAMFORD®

S1L2M-K Winding 06 / 706

Electrical Data		
Insulation System	Class H	
Stator Winding	Double Layer Concentric	
Winding Pitch	Two Thirds	
Winding Leads	4	
Winding Number	06 / 706	
Number of Poles	4	
IP Rating	IP23	
RFI Suppression	EN 61000-6-2 & EN 61000-6-4, refer to factory for others	
Waveform Distortion	NO LOAD < 2% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%	
Short Circuit Ratio	1/Xd	
Steady State X/R Ratio	4.01	
	60 Hz	
Telephone Interference	TIF<50	
Voltage Series	240	240
Power Factor	0.8	1.0
kVA Base Rating (Class H)	29.7	32.5
Saturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	0.912	0.998
X'd Dir. Axis Transient	0.113	0.123
X" d Dir. Axis Subtransient	0.099	0.109
Xq Quad. Axis Reactance	0.950	1.040
X" q Quad. Axis Subtransient	0.117	0.128
XL Stator Leakage Reactance	0.063	0.069
X2 Negative Sequence Reactance	0.164	0.179
X0 Zero Sequence Reactance	0.004	0.005
Unsaturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	1.095	1.198
X'd Dir. Axis Transient	0.129	0.142
X" d Dir. Axis Subtransient	0.116	0.127
Xq Quad. Axis Reactance	0.979	1.071
X" q Quad. Axis Subtransient	0.140	0.154
XL Stator Leakage Reactance	0.071	0.078
X2 Negative Sequence Reactance	0.197	0.215
X0 Zero Sequence Reactance	0.005	0.006
Time Constants (Seconds)		
T'd TRANSIENT TIME CONST.	0.028	
T" d SUB-TRANSTIME CONST.	0.002	
T'do O.C. FIELD TIME CONST.	0.13	
Ta ARMATURE TIME CONST.	0.014	

STAMFORD®

S1L2M-K Winding 06 / 706



Resistances in Ohms (Ω) at 22°C		
Stator Winding Resistance (Ra)	0.066 Ω per phase series connected	
Rotor Winding Resistance (Rf)	0.985 Ω	
Exciter Stator Winding Resistance	16.65 Ω	
Exciter Rotor Winding Resistance	0.118 Ω per phase	
Positive Sequence Resistance (R1)	0.083 Ω	
Negative Sequence Resistance (R2)	0.095 Ω	
Zero Sequence Resistance (R0)	0.083 Ω	
Aux Winding Resistance (with winding 706 only)	2.2 Ω	
Mechanical data		
Cooling Air	0.212 m³/sec (60Hz)	
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation.	
	1 Bearing	2 Bearing
SAE Adaptor	3, 4	3, 4, None
Moment of Inertia	0.2988 kgm²	0.2995 kgm²
Weight Wound Stator	71.4kg	71.4kg
Weight Wound Rotor	62.8kg	64.8kg
Weight Complete Alternator	174kg	200kg
Shipping weight in a Crate	221kg	247kg
Packing Crate Size	1050 x 570 x 960(mm)	1050 x 570 x 960(mm)
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	-	BALL. 6309-2RS (ISO)
Bearing Non-Drive End	Ball Bearing, 6306-2RS1	Ball Bearing, 6306-2RS1

STAMFORD®

S1L2M-K Winding 06 / 706

Single Phase Efficiency Curves

60Hz

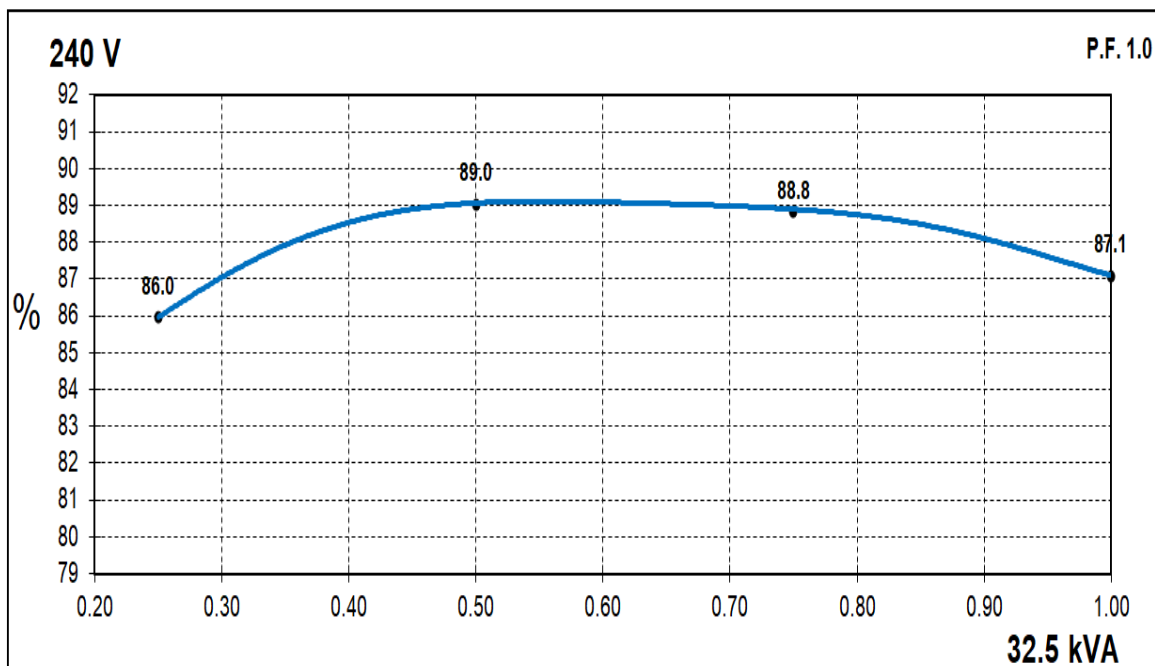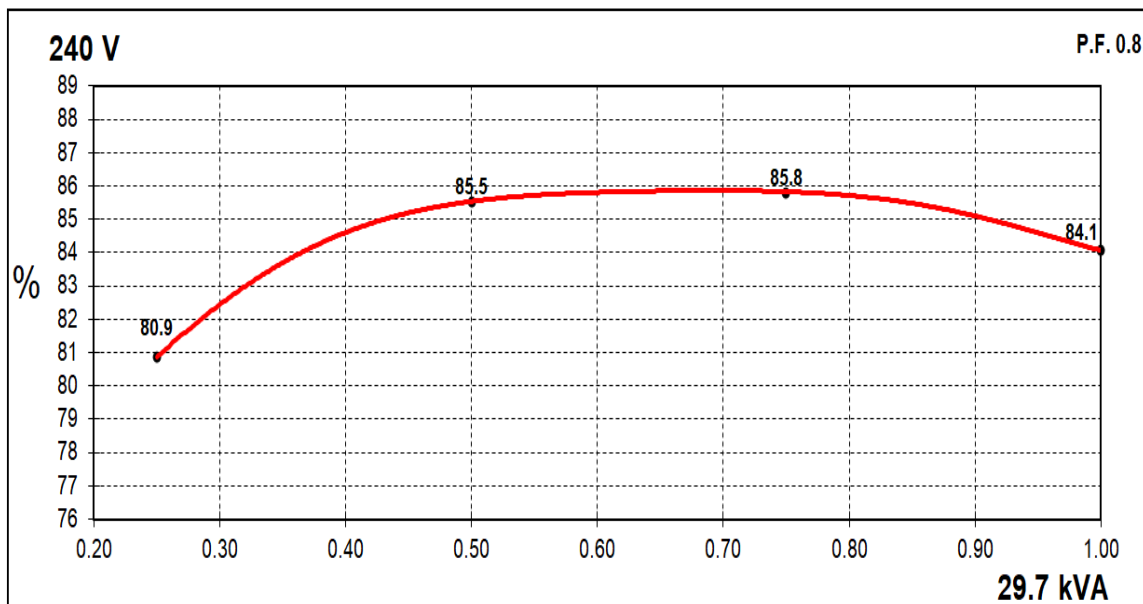


ES10462551, A.3, Released, Performance Specification, Page 5 of 9, System: cmipm.cummins.com Downloaded: 02-10-2025 11:51UTC
SID: dcnz6cG0Pw4xKOjZXNxRc0ZAP19iOVX8oIfznQmbyjCjD3jnhGx_OqWmy1BHABXGYj6suXVr0rs0W6AUD9xw==

STAMFORD®
S1L2M-K Winding 06 / 706

Locked Rotor Motor Starting Curves

60Hz

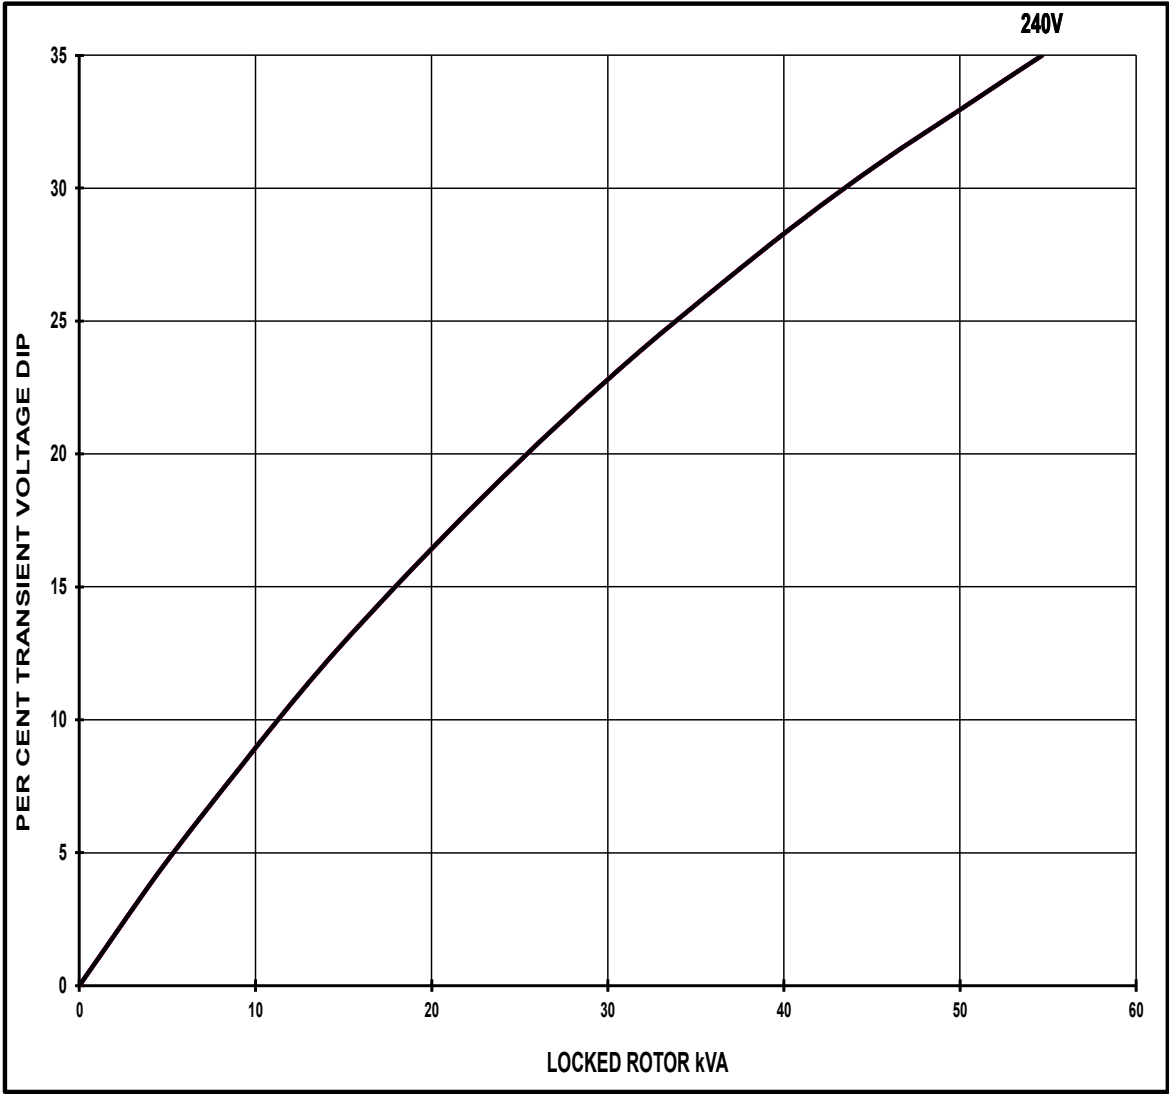


Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor	
PF	Factor	For voltage rise multiply voltage dip by 1.25	
< 0.5	1.00		
0.5	0.97		
0.6	0.93		
0.7	0.90		
0.8	0.85		
0.9	0.83		
1.0	0.80		

STAMFORD
S1L2M-K Winding 06 / 706
Short Circuit Decrement Curve

**Note: Applicable only for Winding 706(Auxiliary winding).
Winding 06(no Auxiliary winding) will not provide short circuit capability.**

60Hz

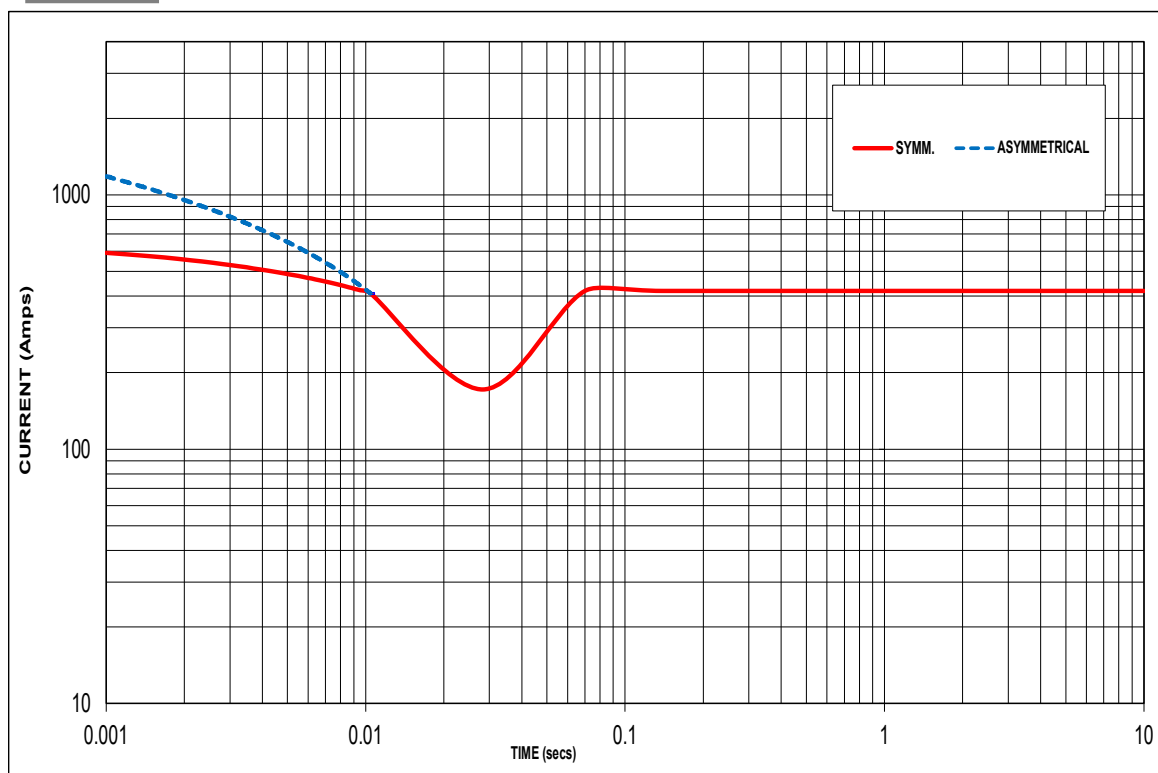


Sustained Short Circuit = 419 Amps

Note: The alternator is capable of delivering 300% short-circuit current for 10 seconds as per requirements specified by marine agencies.

STAMFORD®

S1L2M-K Winding 06 / 706

Typical Alternator Operating Chart

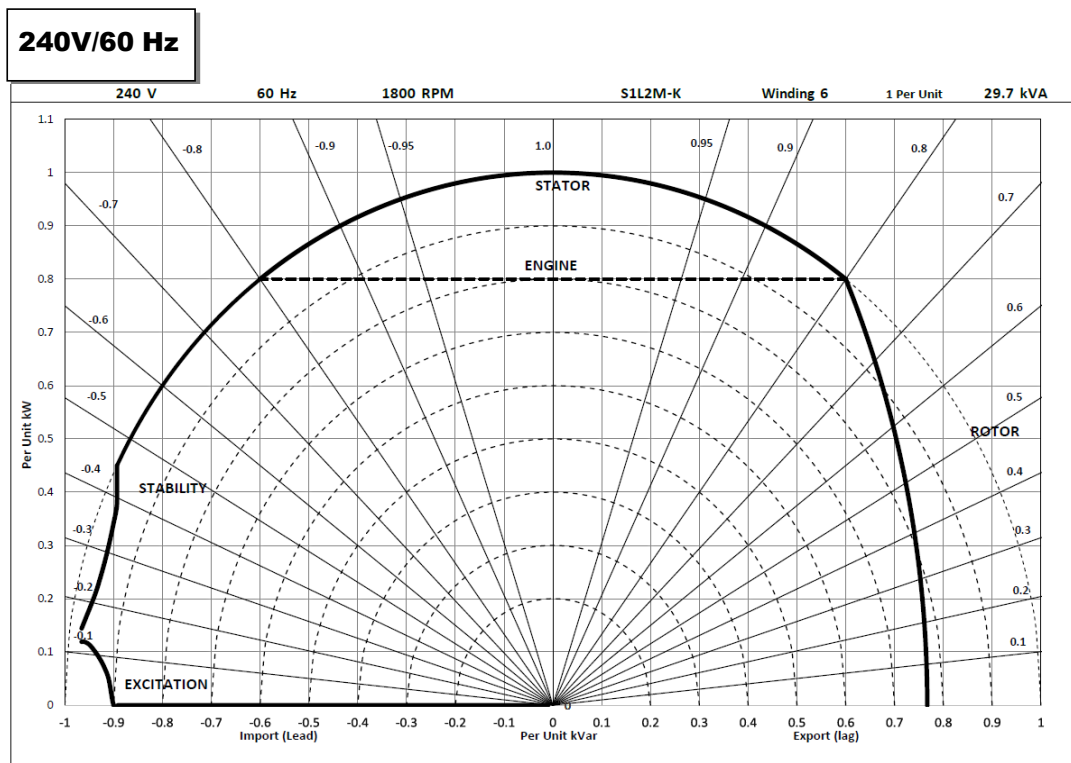

STAMFORD

S1L2M-K Winding 06 / 706

RATINGS AT 0.8/1.0 POWER FACTOR

Class - Temp Rise	Cont. H - 110/50°C	Cont. F - 90/50°C	Cont. B - 70/50°C	Cont. B - 70/50°C
60 Hz				
Series (V)	240 240	240 240	240 240	240 240
Power Factor	0.8 1.0	0.8 1.0	0.8 1.0	0.8 1.0
kVA	29.7 32.5	26.8 29.4	23.7 25.9	22.7 25.0
kW	23.8 32.5	21.4 29.4	19.0 25.9	18.2 25.0
Efficiency (%)	84.1 87.1	84.6 87.7	85.1 88.2	85.2 88.3
kW Input	28.3 37.3	25.3 33.5	22.3 29.4	21.3 28.3

De-Rates

All values tabulated above are subject to the following reductions:

- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 50°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

news.stamford-avk.com

For Applications Support:
applications@cummins.com

For Customer Service:
service-engineers@stamford-avk.com

For General Enquiries:
info@cumminsgeneratortechnologies.com

Copyright 2016. Cummins Generator Technologies Ltd. All rights reserved.

Cummins and the Cummins logo are registered trade marks of Cummins Inc.

STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

