

S6L1M-D4 Wdg.311/312 - Technical Data Sheet

Standards

STAMFORD industrial alternators meet the requirements of the relevant parts of the IEC 60034 and the relevant sections of other international standards such as BS5000-3, ISO 8528-3, VDE 0530, NEMA MG1-32, CSA C22.2-100 and AS 60034. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System					
AVR Type	MX341	MX321/MX322	DECS100	DECS150	
Voltage Regulation	± 1%	± 0.5%	± 0.25%	± 0.25%	with 4% Engine Governing
AVR Power	PMG	PMG	PMG	PMG	

No Load Excitation Voltage (V)	16 - 15.2
No Load Excitation Current (A)	0.87 - 0.82
Full Load Excitation Voltage (V)	59
Full Load Excitation Current (A)	2.9
Exciter Time Constant (seconds)	0.17

STAMFORD

S6L1M-D4 Wdg.311/312

Electrical Data								
Insulation System	H							
Stator Winding	Double Layer Concentric							
Winding Pitch	2/3							
Winding Leads	12/6							
Winding Number	311/312							
Number of Poles	4							
IP Rating	IP23							
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others							
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
Short Circuit Ratio	1/Xd							
Steady State X/R Ratio	19.93							
50 Hz					60 Hz			
Telephone Interference	THF<2%				TIF<50			
Cooling Air Flow	1.11 m³/sec				1.33 m³/sec			
Voltage Series Star (V)	380	400	415	440	416	440	460	480
Voltage Parallel Star (V)*	190	200	208	220	208	220	230	240
Voltage Delta (V)	220	230	240	254	240	254	266	277
kVA Base Rating (Class H) for Reactance Values (kVA)	765	785	805	770	887	931	969	994
Saturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	1.70	1.58	1.50	1.28	1.98	1.86	1.77	1.67
X'd Dir. Axis Transient	0.12	0.11	0.11	0.09	0.14	0.13	0.13	0.12
X''d Dir. Axis Subtransient	0.10	0.09	0.09	0.07	0.12	0.11	0.10	0.10
Xq Quad. Axis Reactance	1.53	1.42	1.35	1.15	1.78	1.67	1.59	1.50
X''q Quad. Axis Subtransient	0.24	0.22	0.21	0.18	0.28	0.26	0.25	0.23
XL Stator Leakage Reactance	0.06	0.05	0.05	0.04	0.07	0.06	0.06	0.05
X2 Negative Sequence Reactance	0.15	0.14	0.13	0.11	0.17	0.16	0.15	0.14
X0 Zero Sequence Reactance	0.04	0.04	0.03	0.03	0.05	0.04	0.04	0.04
Unsaturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	2.05	1.89	1.80	1.54	2.37	2.23	2.12	2.00
X'd Dir. Axis Transient	0.14	0.13	0.12	0.11	0.16	0.15	0.15	0.14
X''d Dir. Axis Subtransient	0.12	0.11	0.10	0.09	0.13	0.13	0.12	0.11
Xq Quad. Axis Reactance	1.58	1.46	1.39	1.19	1.84	1.72	1.64	1.54
X''q Quad. Axis Subtransient	0.29	0.27	0.25	0.22	0.33	0.31	0.30	0.28
XL Stator Leakage Reactance	0.06	0.06	0.06	0.05	0.07	0.07	0.07	0.06
Xlr Rotor Leakage Reactance	0.07	0.07	0.06	0.05	0.08	0.08	0.07	0.07
X2 Negative Sequence Reactance	0.18	0.16	0.16	0.13	0.20	0.19	0.18	0.17
X0 Zero Sequence Reactance	0.05	0.04	0.04	0.03	0.05	0.05	0.05	0.05

* Parallel Star connection only available with 12 leads winding option

STAMFORD

S6L1M-D4 Wdg.311/312


Time Constants (Seconds)		
T'd Transient Time Const.	0.088	
T''d Sub-Transient Time Const.	0.015	
T'do O.C. Field Time Const.	3.63	
Ta Armature Time Const.	0.025	
T''q Sub-Transient Time Const.	0.01	
Resistances in Ohms (Ω) at 22 ⁰ C		
Stator Winding Resistance (Ra), per phase for series connected	0.00210	
Rotor Winding Resistance (Rf)	1.82	
Exciter Stator Winding Resistance	18.47	
Exciter Rotor Winding Resistance per phase	0.095	
PMG Phase Resistance (Rpmg) per phase	1.91	
Positive Sequence Resistance (R1)	0.00263	
Negative Sequence Resistance (R2)	0.00302	
Zero Sequence Resistance (R0)	0.00263	
Saturation Factors	400V	480V
SG1.0	0.528	0.537
SG1.2	2.099	1.879
Mechanical Data		
Shaft and Keys	All alternator rotors are dynamically balanced to better than ISO 21940-11 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearing
SAE Adaptor	SAE0,1	SAE0,1
Moment of Inertia	19 kgm²	18.5 kgm²
Weight Wound Stator	924kg	924kg
Weight Wound Rotor	800kg	758kg
Weight Complete Alternator	1953kg	2030kg
Shipping weight in a Crate	1996kg	2073kg
Packing Crate Size	160x105x153(cm)	160x105x153(cm)
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	-	BALL 6224
Bearing Non-Drive End	BALL 6317	BALL 6317

STAMFORD®








S6L1M-D4 Wdg.311/312

THREE PHASE EFFICIENCY CURVES

50Hz

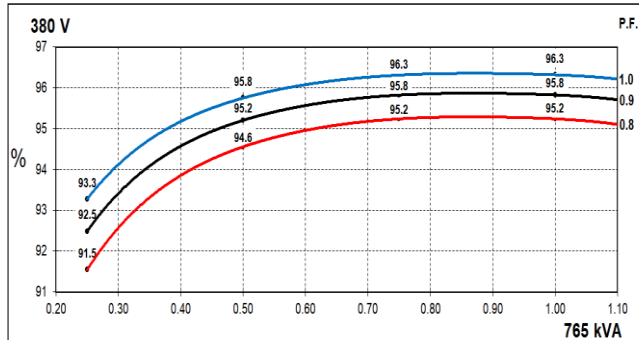

60Hz

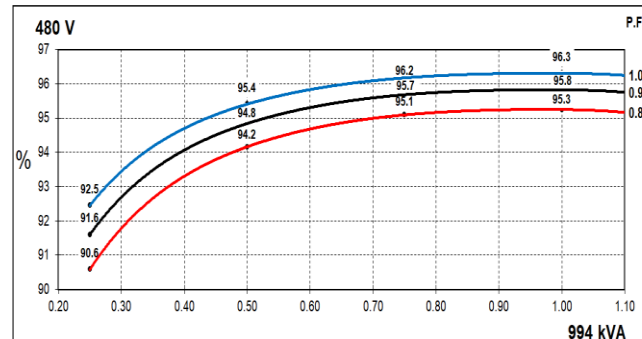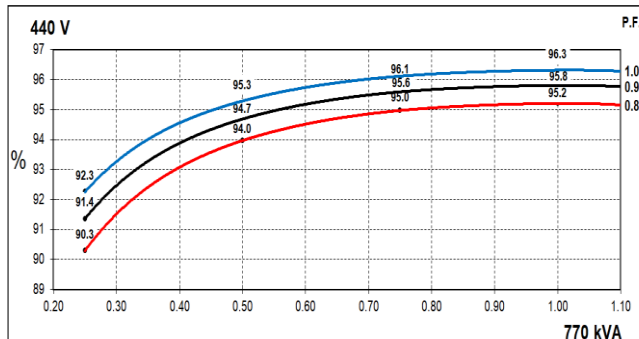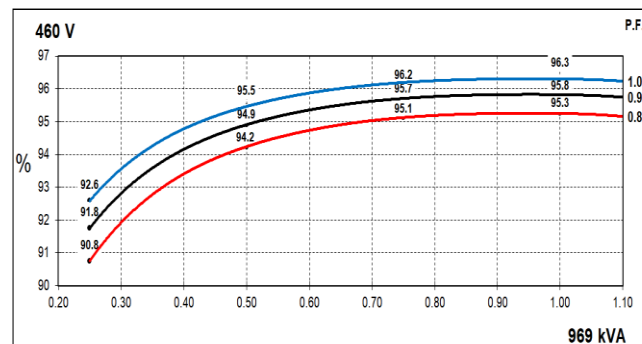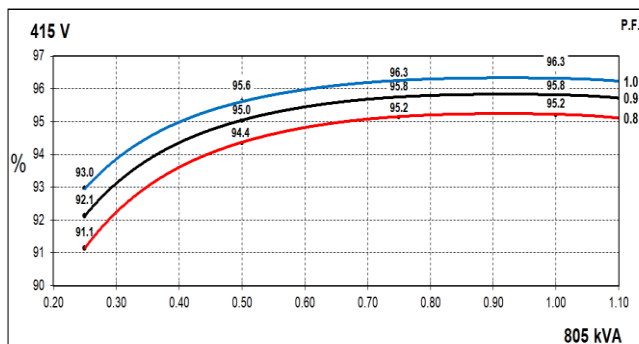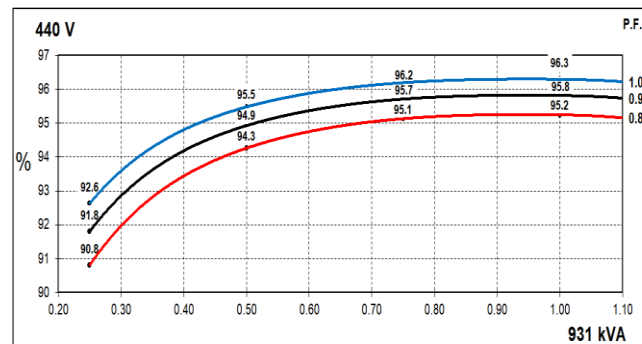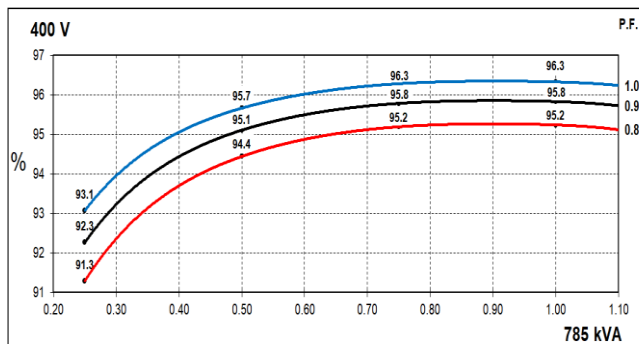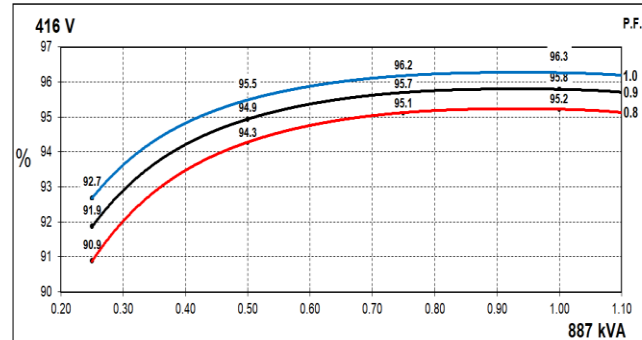


STAMFORD®


S6L1M-D4 Wdg.311/312

Locked Rotor Motor Starting Curves - Separately Excited

50Hz

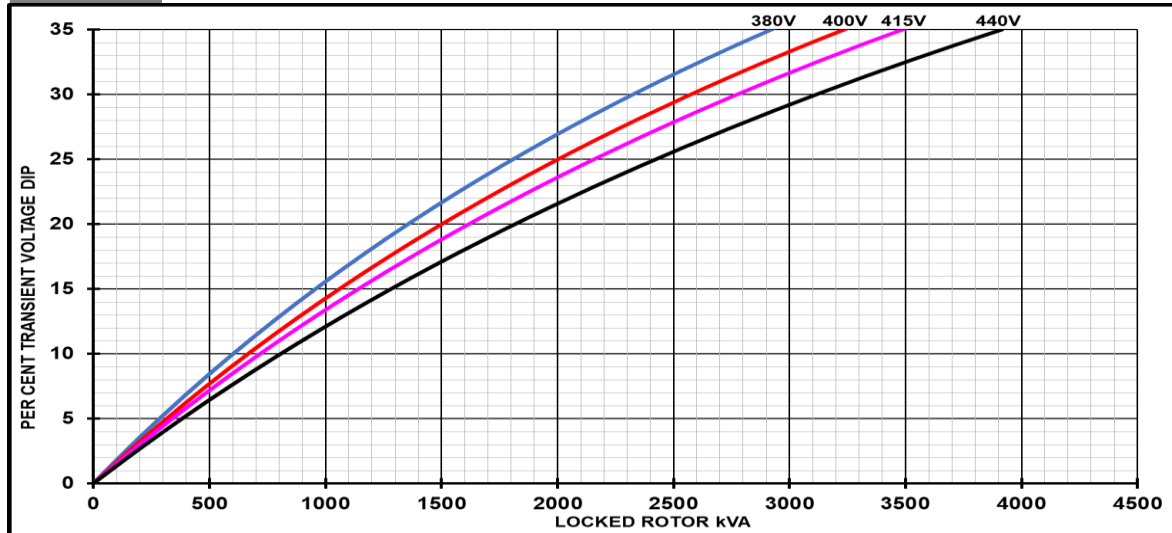

60Hz

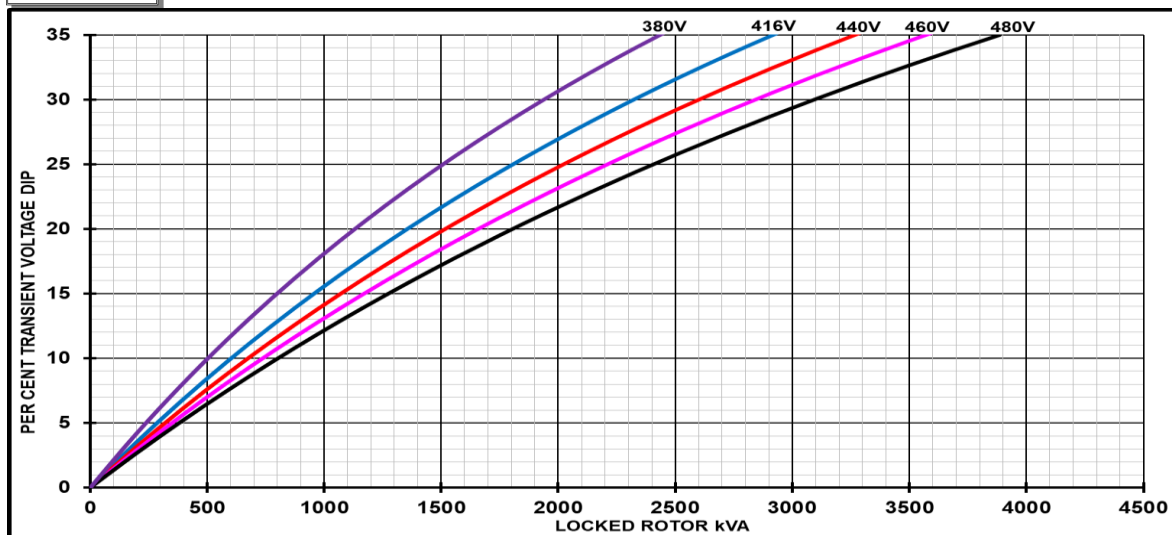

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor	
Lagging PF	Scaling Factor	Lagging PF	Scaling Factor
<= 0.4	1.00	<= 0.4	1.25
0.5	0.95	0.5	1.20
0.6	0.90	0.6	1.15
0.7	0.86	0.7	1.10
0.8	0.83	> 0.7	1.00
0.9	0.75		
0.95	0.70		
1	0.65		


Note: To determine % Transient Voltage Dip or Voltage Rise at various PF, multiply the % Voltage Dip from the curve directly by the Scaling Factor.

STAMFORD®

S6L1M-D4 Wdg.311/312


Three-phase Short Circuit Decrement Curve - Separately Excited

50Hz

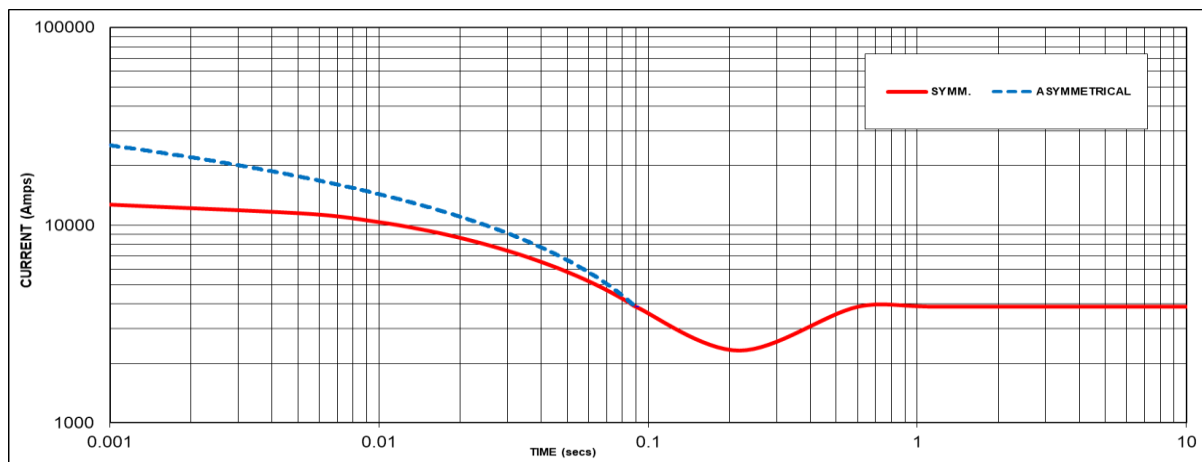

60Hz

Sustained Short Circuit = 3859 Amps

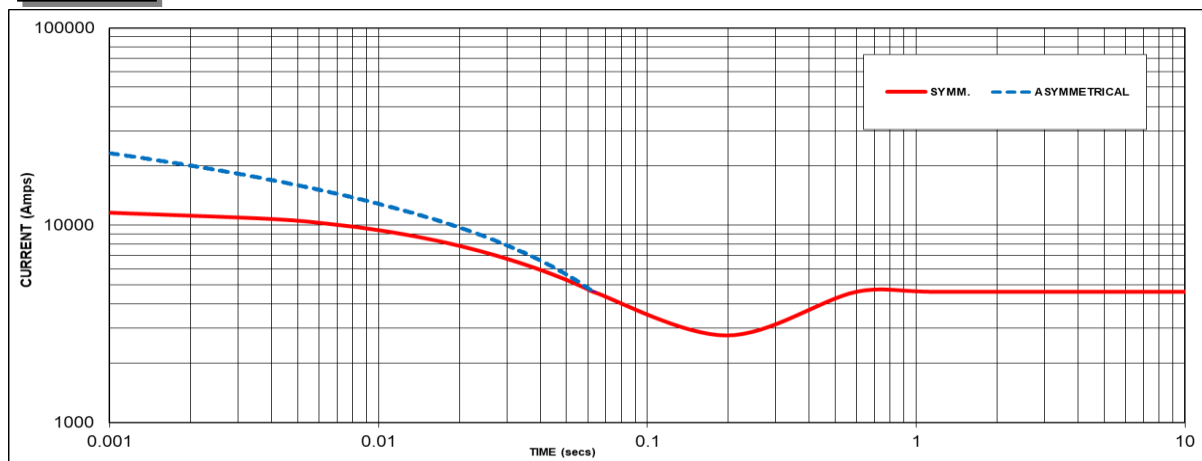

Sustained Short Circuit = 4591 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380V	X 1.00	416V	X 1.00
400V	X 1.05	440V	X 1.06
415V	X 1.09	460V	X 1.10
440V	X 1.16	480V	X 1.15

The sustained current value is constant irrespective of voltage level.

If MX322 or digital AVR is used, the sustained short-circuit current value is to be multiplied by a factor of 1.1.

The alternator is capable of delivering 300% short-circuit current for 10 seconds as per requirements specified by marine agencies.

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

Note 3

All other times are unchanged

Curves are drawn for Star connections under no-load excitation at rated speeds. For other connection (where applicable) the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2


Series Delta = Curve current value X 1.732

STAMFORD


S6L1M-D4 Wdg.311/312

Typical Alternator Operating Charts

400V/50Hz

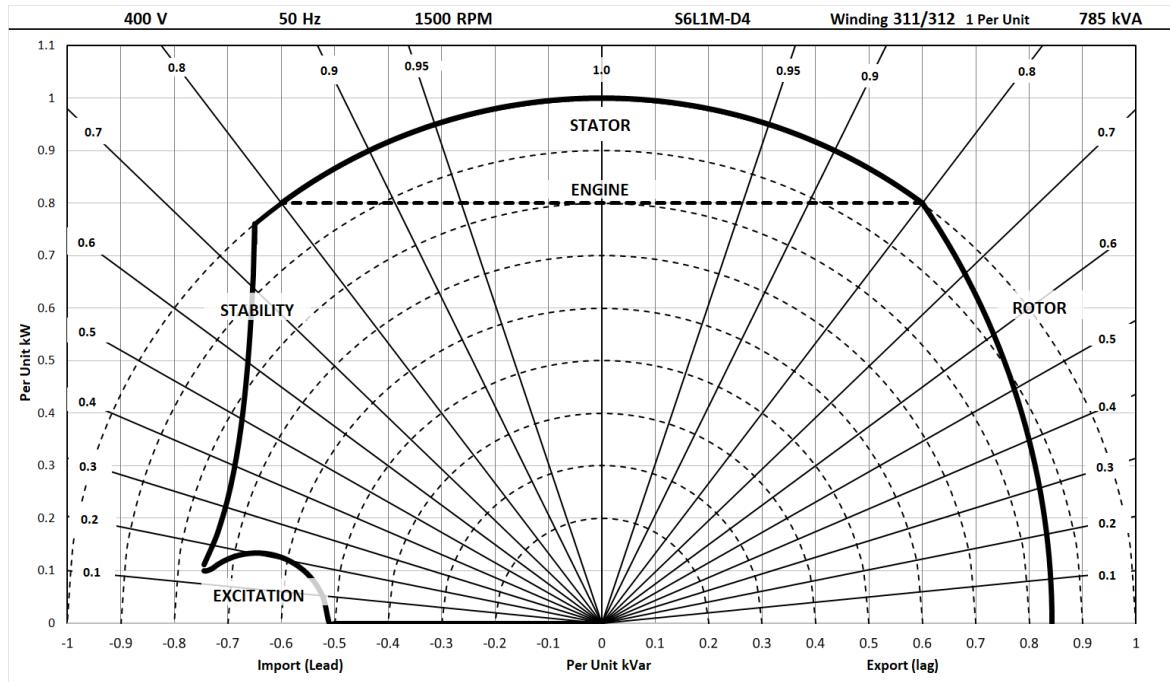

480V/60Hz

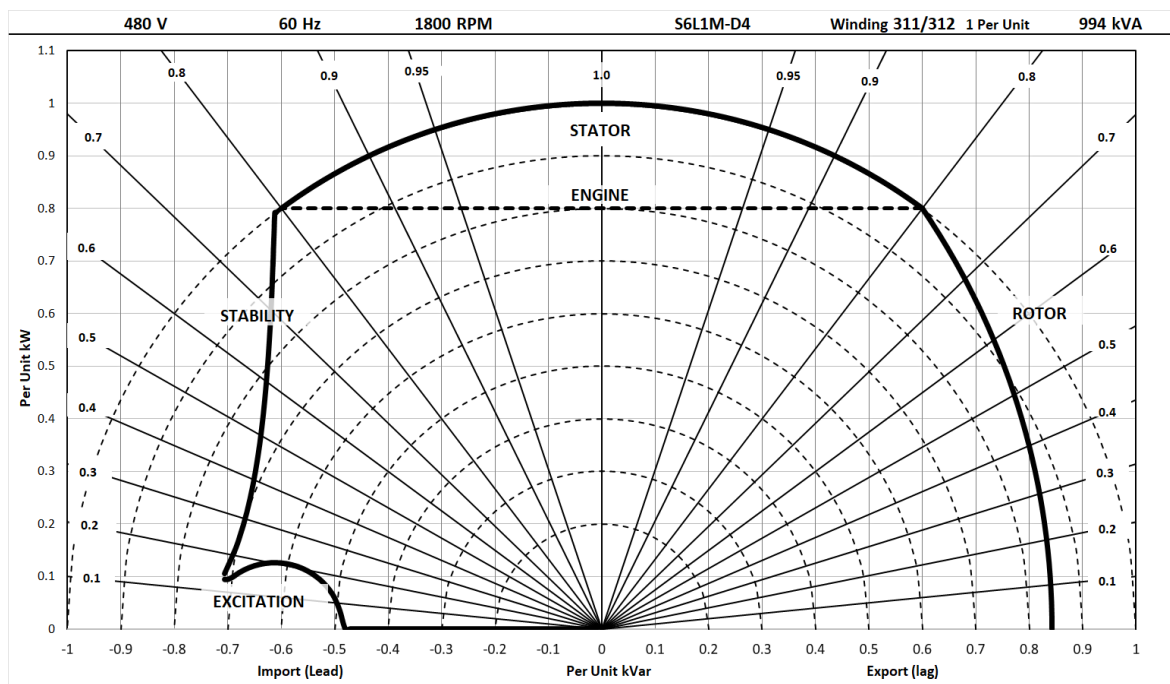

STAMFORD®

S6L1M-D4 Wdg.311/312

RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby				Cont. H - 110/50°C				Cont. F - 90/50°C				Cont. B - 70/50°C			
50 Hz	Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)*	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	N/A	N/A	N/A	N/A	765	785	805	770	700	720	740	700	638	656	675	617
	kW	N/A	N/A	N/A	N/A	612	628	644	616	560	576	592	560	510	525	540	494
	Efficiency (%)	N/A	N/A	N/A	N/A	95.2	95.2	95.2	95.2	95.3	95.3	95.3	95.2	95.3	95.3	95.2	95.1
	kW Input	N/A	N/A	N/A	N/A	643	659	676	647	588	605	621	588	536	551	567	519

60 Hz	Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)*	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	N/A	N/A	N/A	N/A	887	931	969	994	819	863	900	925	713	750	781	800
	kW	N/A	N/A	N/A	N/A	710	745	775	795	655	690	720	740	570	600	625	640
	Efficiency (%)	N/A	N/A	N/A	N/A	95.2	95.2	95.3	95.3	95.2	95.3	95.3	95.3	95.2	95.2	95.2	95.2
	kW Input	N/A	N/A	N/A	N/A	745	782	814	835	688	725	756	777	599	630	656	672

* Parallel Star connection only available with 12 leads winding option

De-rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C @ Class H temperature rise (please refer to applications for ambient temperature de-rates at other temperature rise classes)
- For marine alternators, 3% for every 5°C by which the operational ambient temperature exceeds 50°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters (for <690V) or 1500 meters (for >690V) must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

stamford-avk.com

For Applications Support:
applications@cummins.com

For Customer Service:
emea.service@cummins.com

For General Enquiries:
Stamford-avk@cummins.com

Copyright 2025. Cummins Generator Technologies Ltd. All rights reserved.
Cummins and the Cummins logo are registered trade marks of Cummins Inc.
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

