

**Technical Data Sheet for AvK-Alternators**

FM 7.3-5

Date:	09/01/14	Customer:	GENERIC DATASHEET only
Project No.:		AvK Reference:	dig156p_6_50_6300_A048N159

<b>Object data:</b>	
Site:	Prime Mover:
Application: Stationary Power Plant	Manufacturer:

<b>Generator data:</b>					
Generator:	DIG 156 p/6	Poles:	6	Standards:	IEC 60034
Rated power:	8000 kVA	6400 kWe	6545 kWm		
Power factor:	0.80				
Power at pf 1,0	6434 kVA	6434 kWe	6545 kWm		
Rated voltage:	6.3 kV				
Speed:	1000 1/min				
Frequency:	50 Hz			Voltage range / frequency range:	
Rated current:	733.1 A			Zone A according IEC 60034-1 (dU = +/-5%, df = +/-2%)	
Winding pitch:	ca. 5/6				
Insulation class:	Stator: Class F	Rotor: Class F		Temperature rise:	F
Ambient temperature:	40 ° C		Environment:	Standard environment	
Site altitude:	1000 m				
Enclosure:	IP23		Filter:		
Cooling:	IC 01 - Open-circuit ventilation				
Coolant:	Ambient Air	Temperature	40 ° C	Temperature Air inlet	40 ° C
		Coolant:		generator:	
		Cooling air vol.:	5.5 m³/s	Cooling water quantity:	n/a
Moment of inertia (I):	990 kgm²	Weight:	22500 Kg	Losses (environment):	145 KW
				Losses (cooling):	n/a

Wires:	4 terminals, starpoint connected in terminal box
Operation mode:	Single mode
Regulators:	
Voltage regulator:	DECS 100

<b>Electrical data: (acc. IEC)</b>					
Efficiencies:	110%	100%	75%	50%	25%
Power factor 0.8	97,67	97,78	97,68	97,15	95,46
Power factor 0.9	97,95	98,04	97,89	97,35	95,53
Power factor 1.0	98,22	98,3	98,1	97,55	95,6

<b>Reactances and time constants</b>											
	unsaturated		saturated			unsaturated		saturated			
X <sub>d</sub>	2.02	1.82	p.u.	X <sub>q</sub>	1.01	0.99	p.u.	T <sub>d0'</sub>	3.65 s	T <sub>d0''</sub>	0.04642 s
X <sub>d'</sub>	0.277	0.277	p.u.	X <sub>q'</sub>	1.01	0.99	p.u.	T <sub>d'</sub>	0.50 s	T <sub>q0'</sub>	0.6 s
X <sub>d''</sub>	0.197	0.179	p.u.	X <sub>q''</sub>	0.197	0.197	p.u.	T <sub>d''</sub>	0.03 s	T <sub>q0''</sub>	0.30761 s
X <sub>2</sub>	0.207	0.188	p.u.	X <sub>0</sub>	0.059	0.054	p.u.	T <sub>a</sub>	0.1 s	T <sub>q'</sub>	0.6 s
X <sub>1s</sub>	n.a.	0.107	p.u.							T <sub>q''</sub>	0.06 s
Short circuit ratio saturated: 0.55					Z <sub>n</sub> 4.961 Ohm						


<b>Short circuit data:</b>		
Initial short circuit current (3-phase):	I <sub>k''</sub>	4096 A
Max. peak current (3-phase):	I <sub>s</sub>	10427 A
Sustained short circuit current:	I <sub>k</sub>	2199 A
		Minimum 3 x rated current for max.10 s
Initial short circuit torque:	M <sub>k2</sub>	554.8 kNm
	M <sub>k3</sub>	332.9 kNm
Max. faulty synchron moment:	M <sub>f</sub>	1192.8 kNm
Rated kVA torque:	M <sub>SN</sub>	76.40 kNm
Rated torque	M <sub>N</sub>	61.12 kNm
Shaft torque	M <sub>Sh</sub>	62.51 kNm

<b>Load application:</b>	
max. load application: 4332 kVA (corresponds to 54,15 % from 8000 kVA) for Power factor 0.4 15% transient voltage drop	Power: 8000 kVA Power factor: 0.8 transient voltage drop: -21.7 %

**Remarks:**

<b>Alternator :</b>	<b>DIG 156 p/6</b>		
Rated output [kVA]	8000	Rated power factor:	0.8
Rated frequency [Hz]	50	Rated speed [rpm]	1000
			Rated voltage [kV]: 6.3


### Wirkungsgrad-Kennlinie - Efficiency Curve

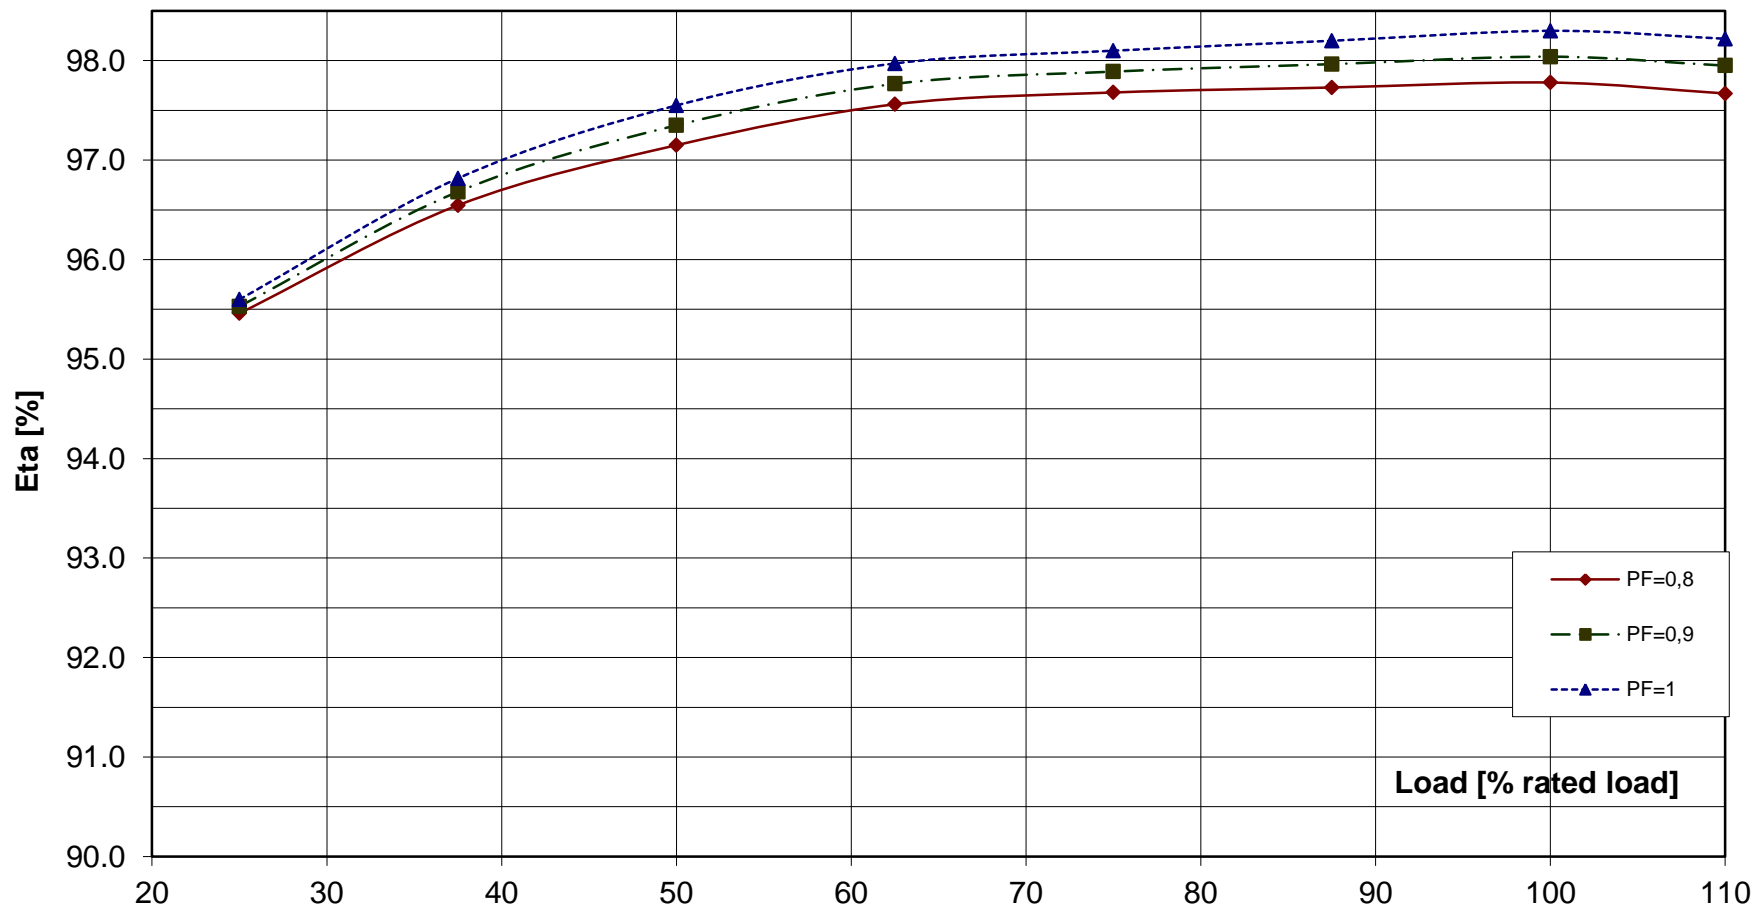

**Alternator : DIG 156 p/6**

Rated output [kVA]	8000	Rated power factor:	0.8	Rated voltage [kV]:	6.3
Rated frequency [Hz]	50	Rated speed [rpm]	1000		

**Transient Voltage rise or drop for sudden load removal or application**

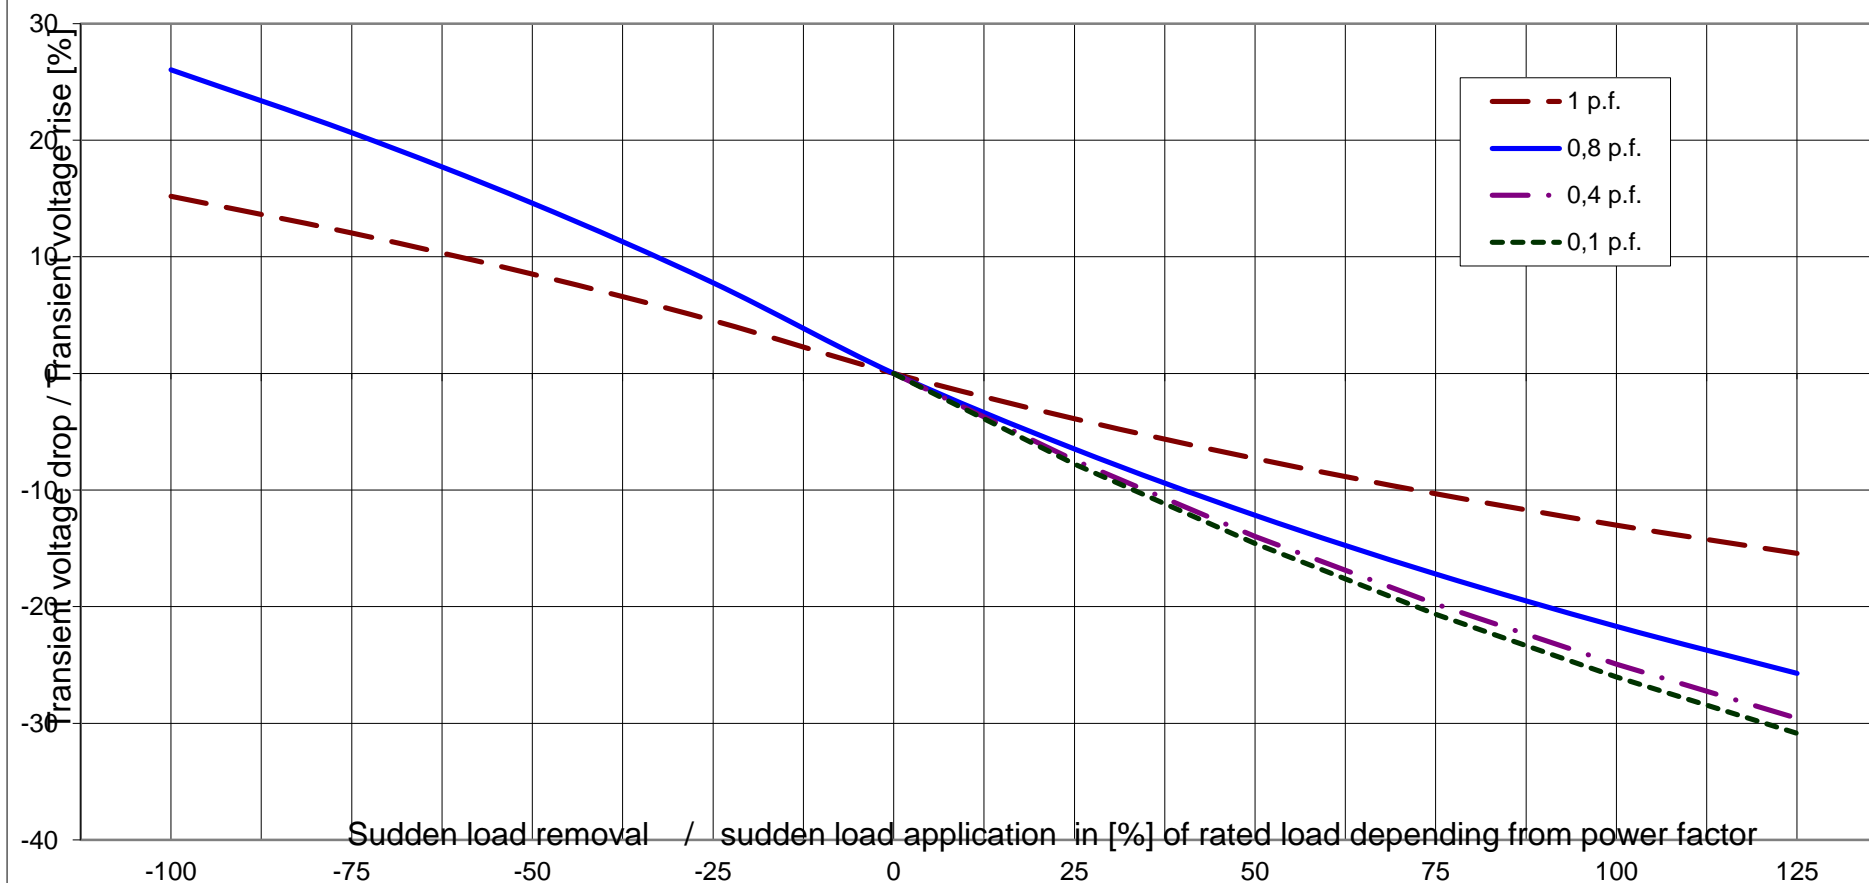




Technisches Datenblatt - Diagramme  
Technical data sheet - Diagrams

ING-FCD-0112

Alternator : **DIG 156 p/6**

Rated output [kVA]	8000	Rated power factor:	0.8	Rated voltage [kV]:	6.3
Rated frequency [Hz]	50	Rated speed [rpm]	1000	MSN related to kVA:	76.39 KNm

Kurzschlußmomenten-Verlauf 2-poliger KS  
Short circuit torque at 2-phase SC

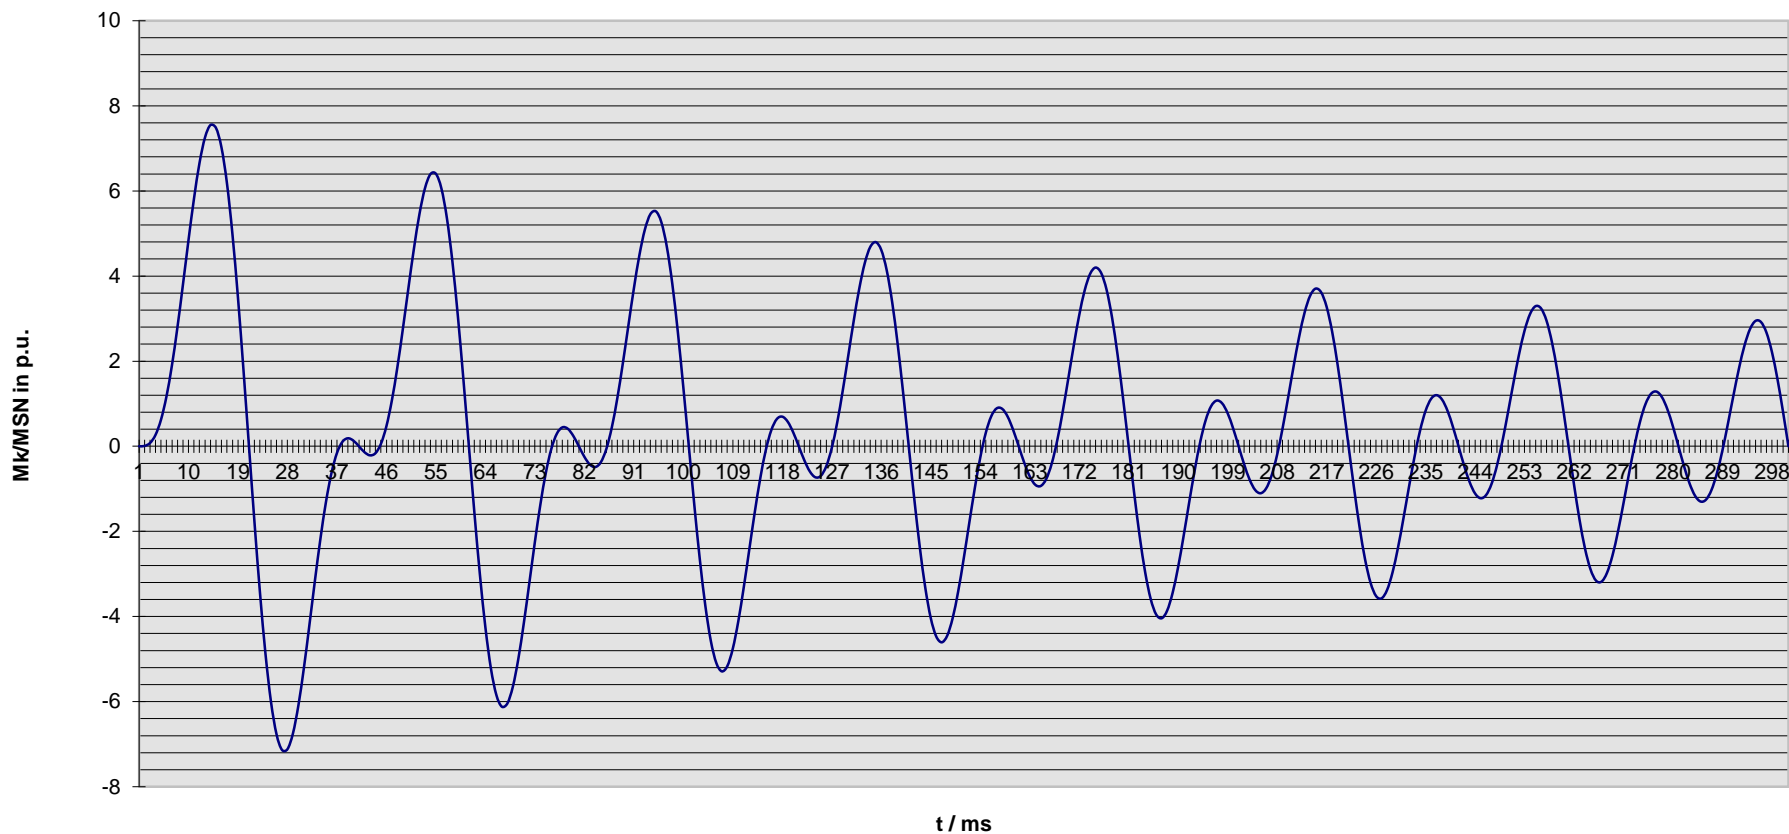

**Nenndaten / nominal data**

DIG 156 p/6

Leistung  $S_N$ : **8000 kVA**

$\cos \varphi$ : **0.80**

*Rating*

*p.f.*

Spannung  $U_N$ : **6.30 kV**

Strom  $I_N$ : **733 A**

*Voltage*

*Current*

Frequenz  $f$ : **50 Hz**

Drehzahl  $n$ : **1,000 min<sup>-1</sup>**

*Frequency*


*Speed*

Schutzart **IP23**

*Protection*

**Kurzschlussstrom  $I_{k3\text{phasig}} / I_N$  [p.u.]**  
**Short-circuit current  $I_{k3\text{phase}} / I_N$  [p.u.]**

**Stosskurzschluss-Strom, 3-phasig, asymmetrisch /**  
*Sudden short circuit current, 3-phase, asymmetrical*

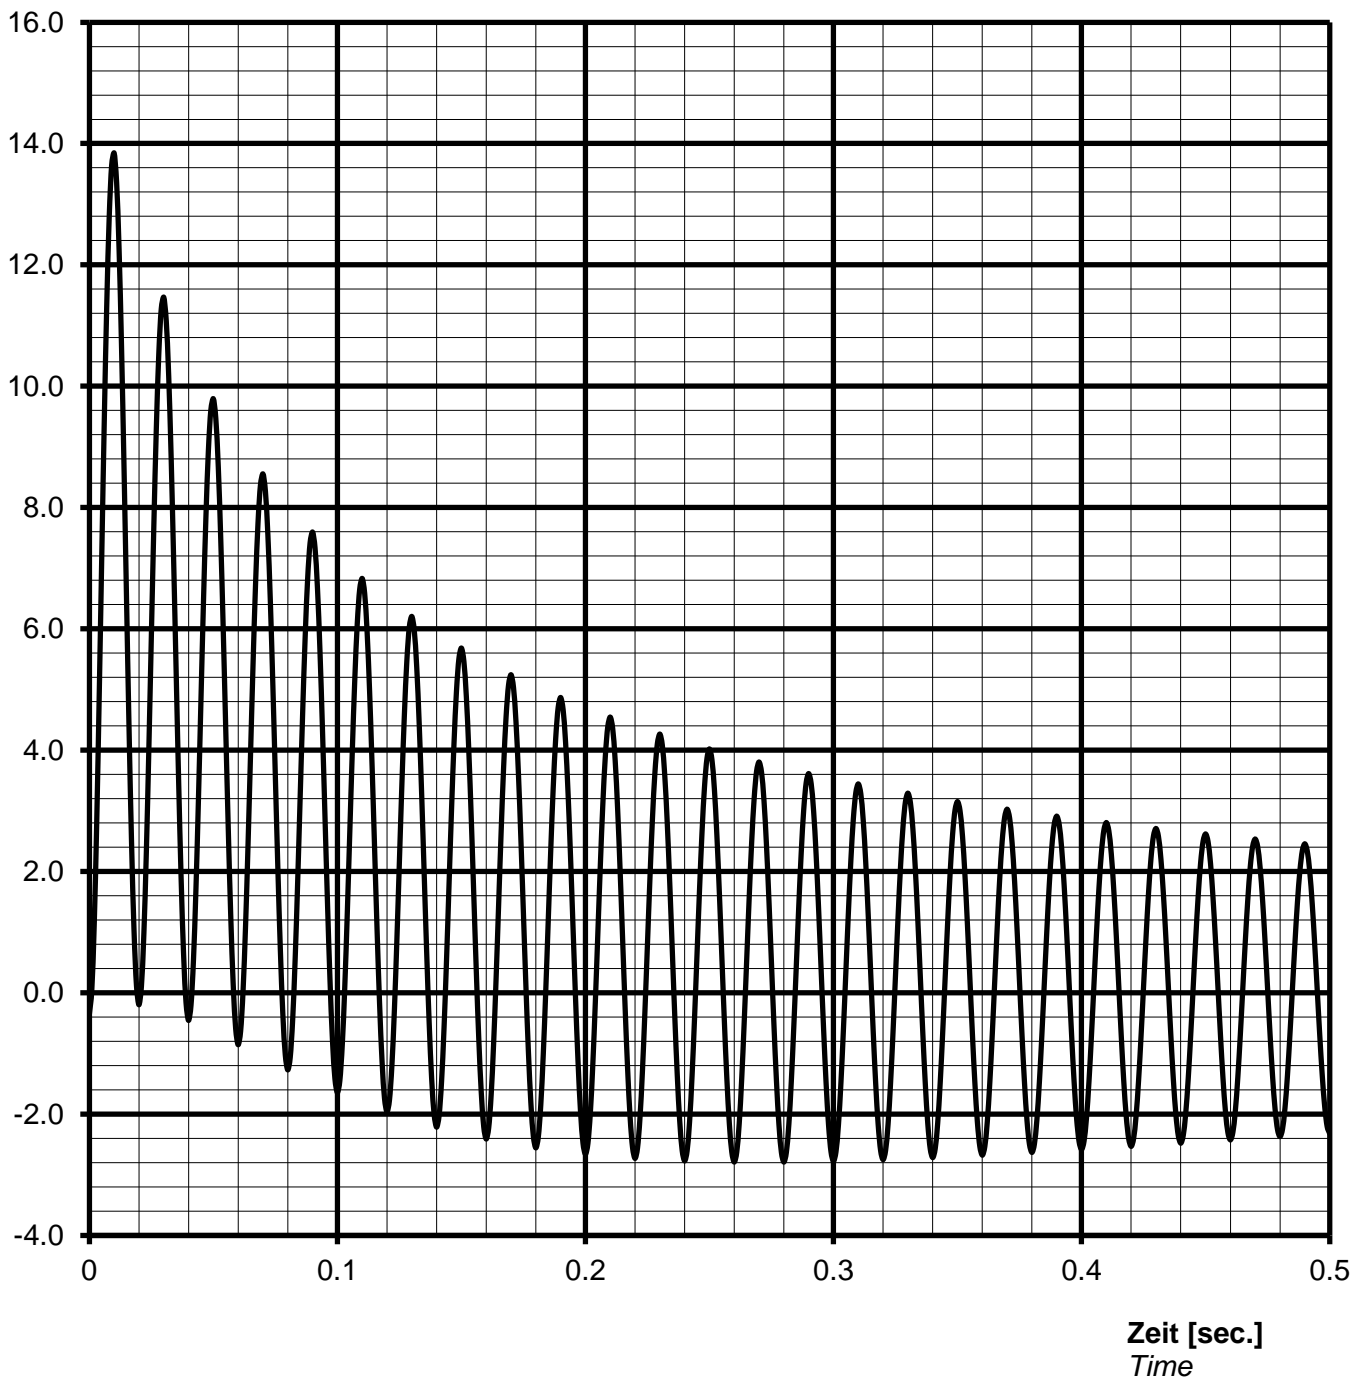

**Notizen / remarks:**

**Maximum asymmetric peak value**  $I_{\text{peak}} =$  **10150 A** or **13.84 p.u.**

**Nenn Daten / nominal data**

**DIG 156 p/6**

Leistung  $S_N$ : **8000** kVA

$\cos \varphi$ : **0.80**

Rating

p.f.

Spannung  $U_N$ : **6.30** kV

Strom  $I_N$ : **733** A

Voltage

Current

Frequenz f: **50** Hz

Drehzahl n: **1000** min<sup>-1</sup>


Frequency

Speed

Schutzart **IP23**

Protection

**Überlast Kennlinie**  
 Overload capability

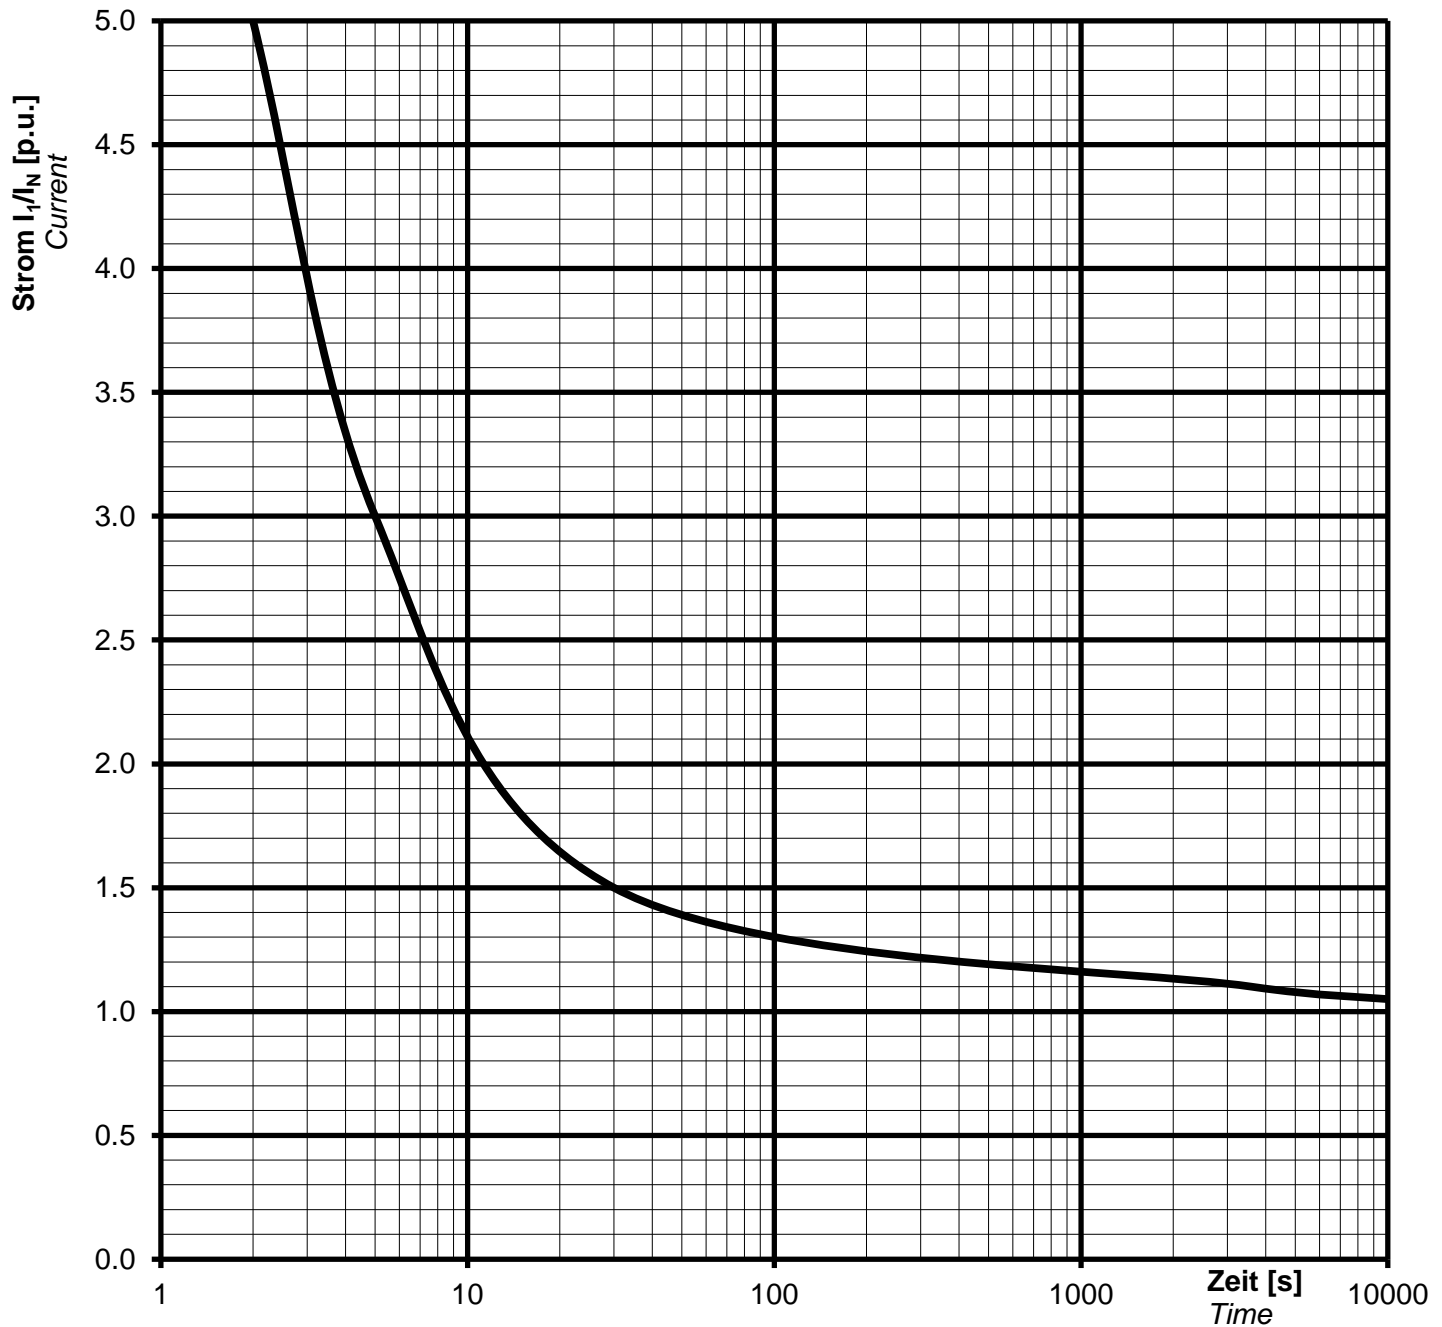

**Notizen / remarks:**

Strom / Zeit Kriterien:

$(I / I_N)^2 \cdot t = 45s$

Current/time characteristics:

1,5 \*  $I_N$  for 30 s

1,1 \*  $I_N$  for 1 h in 6h

#### Nenndaten / nominal data

DIG 156 p/6

Rating  $S_N$ : **8000 kVA**

*p.f.* **0.80**

*Bemessungsleistung*

Leistungsfaktor  $\cos \varphi$ :

Nominal voltage  $U_N$ : **6.30 kV**

Nominal current  $I_N$ : **733 A**

*Bemessungsspannung*

*Bemessungsstrom*

Frequency  $f_N$ : **50 Hz**

Speed  $n$ : **1000 min<sup>-1</sup>**

*Frequenz*

*Drehzahl*

Protection: **IP23**

*Schutzart*

#### Inverse current or unbalanced negative sequence current



Remarks / Notizen:



Technische Daten selbstregelnden Drehstrom-Synchrongenerator  
technical data for self regulating three phase alternator

ING-FCD-0112


TYPE

DIG 156 p/6

Projekt:

Order Nr.:

### Capability (P-Q) Diagram

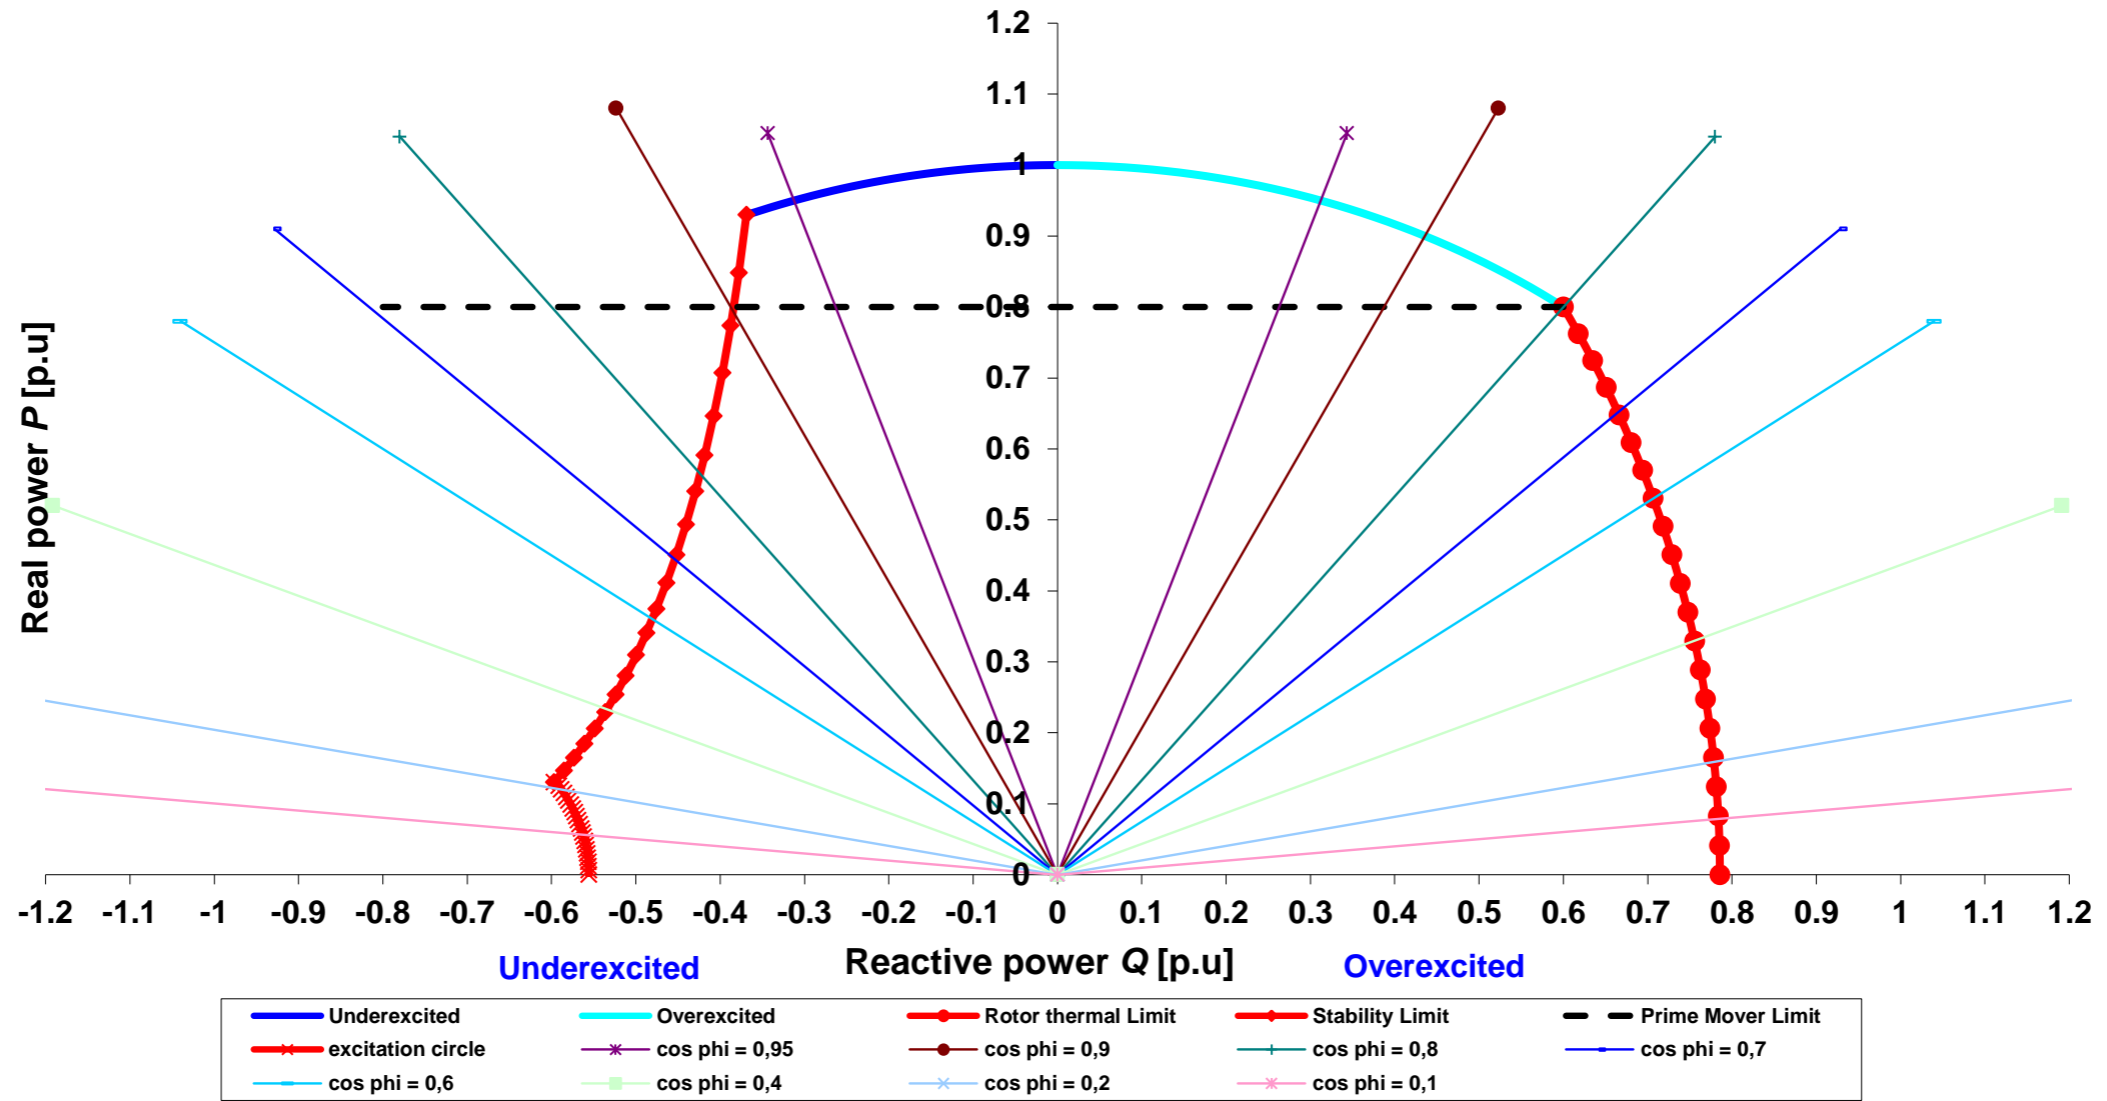

Cummins Generator Technologies

Datum / date:

21/01/2014



