

OUR DIFFERENCE? THE DETAIL.


NOW WITH
3 YEARS
WARRANTY



STAMFORD® S7


Fitted with
CoreCooling™
technology

The S7 Nomenclature

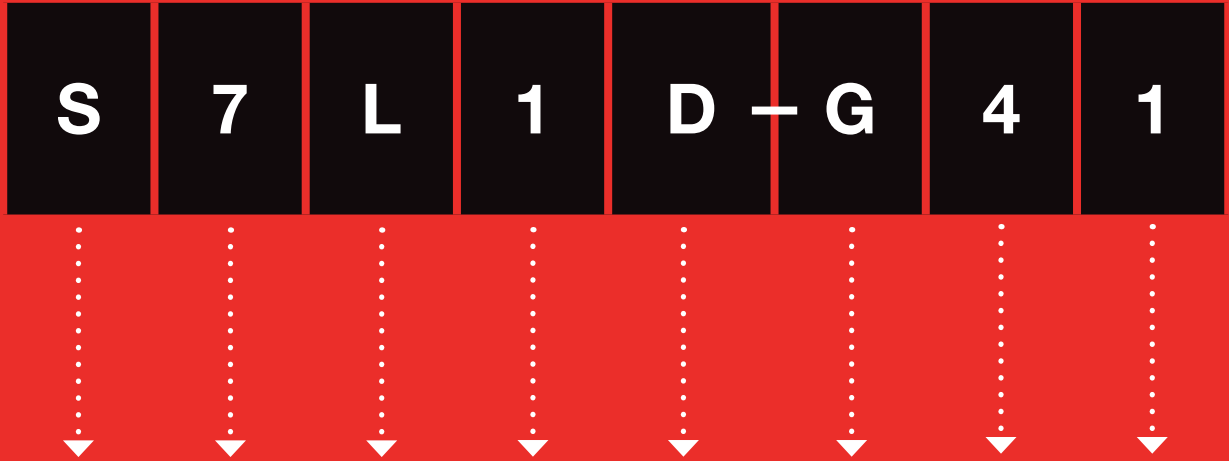

Character	Brand	Family Series	Voltage	Revision	Descriptor	Core Length	Pole	Bearing
Examples	STAMFORD	1/2/3/4/5 etc	L = Low M = Medium H = High	1	D = Dedicated	C/D/E/F/G/ H/J	4	1/2

The New **STAMFORD**® S7 Dedicated

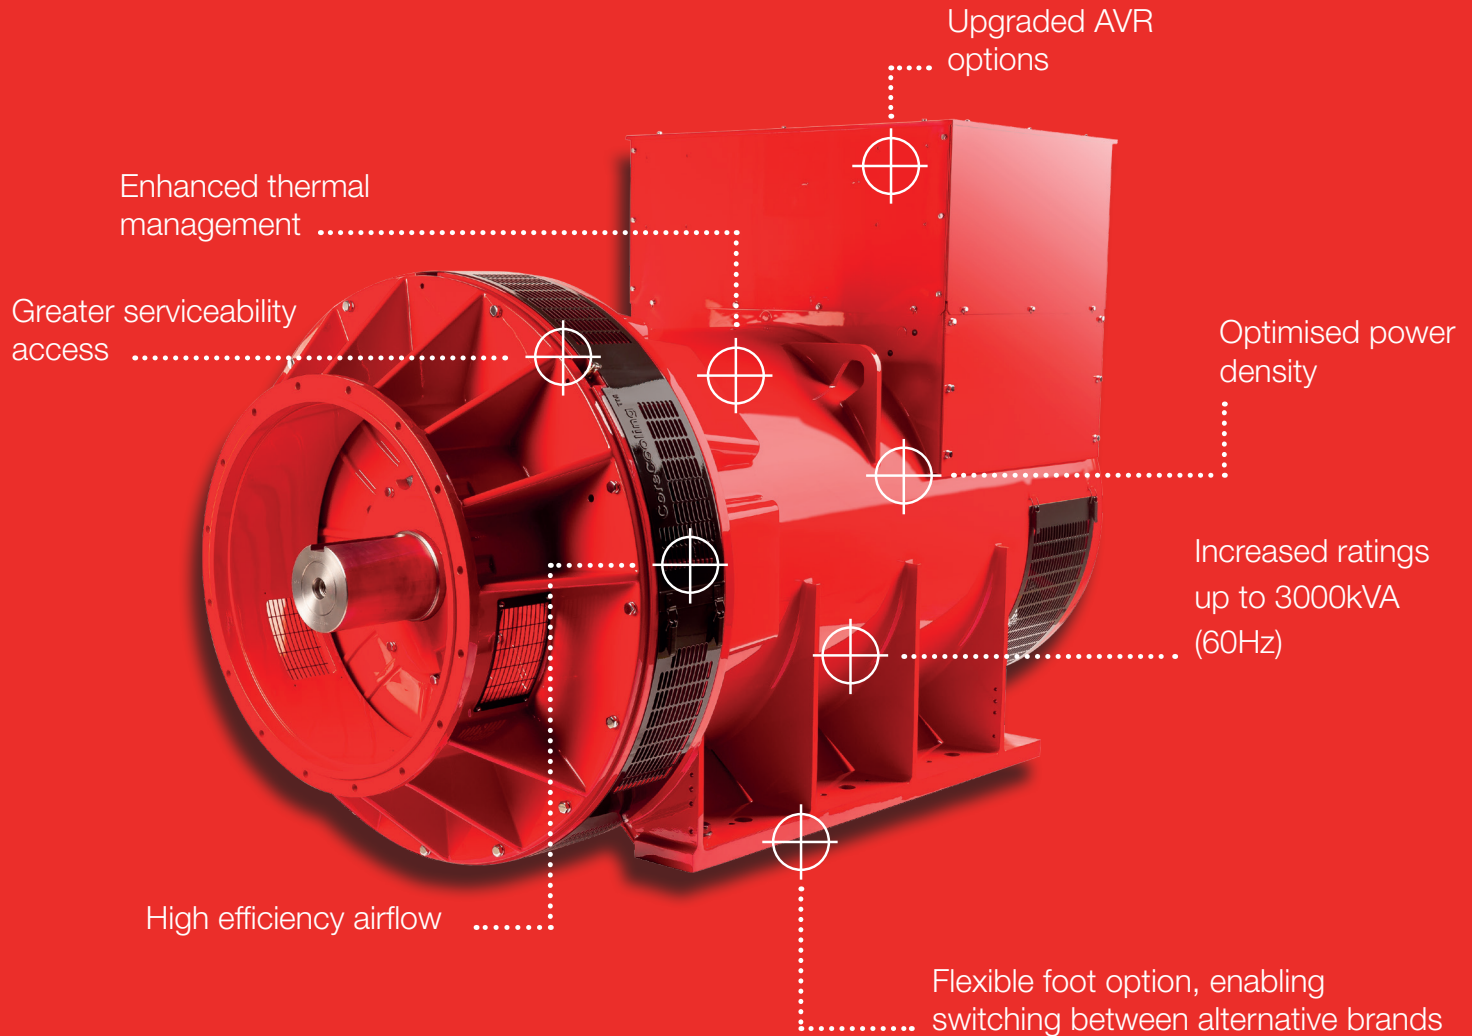

Product evolution through technological revolution.
Our new **CoreCooling™** technology results in improved thermal performance and increased power density... it's in the detail.

S7 Dedicated Ratings

50Hz

Class H 125/140						
Winding Number	312					
Volts	380		400		415	
Model	kW	kVA	kW	kVA	kW	kVA
S7L1D-C41	1204	1505	1240	1550	1240	1550
S7L1D-D41	1292	1615	1320	1650	1320	1650
S7L1D-E41	1360	1700	1400	1750	1400	1750
S7L1D-F41	1476	1845	1520	1900	1520	1900
S7L1D-G41	1616	2020	1664	2080	1664	2080
S7L1D-H41	1798	2135	1800	2250	1800	2250
S7L1D-J41	1940	2425	2000	2500	2000	2500

Standby 150/40						
Winding Number	312					
Volts	380		400		415	
Model	kW	kVA	kW	kVA	kW	kVA
S7L1D-C41	1256	1570	1292	1615	1292	1615
S7L1D-D41	1340	1675	1376	1720	1376	1720
S7L1D-E41	1414	1768	1456	1820	1456	1820
S7L1D-F41	1536	1920	1584	1980	1584	1980
S7L1D-G41	1684	2105	1736	2170	1736	2170
S7L1D-H41	1780	2225	1872	2340	1872	2340
S7L1D-J41	2020	2525	2080	2600	2080	2600


Standby 163/27						
Winding Number	312					
Volts	380		400		415	
Model	kW	kVA	kW	kVA	kW	kVA
S7L1D-C41	1292	1615	1328	1660	1328	1660
S7L1D-D41	1372	1715	1416	1770	1416	1770
S7L1D-E41	1455	1819	1498	1873	1498	1873
S7L1D-F41	1580	1975	1628	2035	1628	2035
S7L1D-G41	1732	2165	1800	2250	1800	2250
S7L1D-H41	1832	2290	1920	2400	1920	2400
S7L1D-J41	2080	2600	2144	2680	2144	2680

60Hz

Class H 125/140						
Winding Number	312					
Volts	416		440		480	
Model	kW	kVA	kW	kVA	kW	kVA
S7L1D-C41	1365	1706	1455	1819	1515	1894
S7L1D-D41	1455	1819	1550	1937	1615	2019
S7L1D-E41	1470	1837	1555	1944	1695	2119
S7L1D-F41	1656	2070	1770	2212	1840	2300
S7L1D-G41	1880	2350	2000	2500	2080	2600
S7L1D-H41	1940	2425	2030	2537	2200	2750
S7L1D-J41	2080	2600	2200	2750	2400	3000

Standby 150/40						
Winding Number	312					
Volts	416		440		480	
Model	kW	kVA	kW	kVA	kW	kVA
S7L1D-C41	1420	1775	1515	1894	1580	1975
S7L1D-D41	1520	1990	1615	2019	1680	2100
S7L1D-E41	1530	1912	1620	2025	1760	2200
S7L1D-F41	1725	2156	1840	2300	1920	2400
S7L1D-G41	1950	2437	2080	2600	2165	2706
S7L1D-H41	2015	2519	2110	2637	2290	2862
S7L1D-J41	2170	2712	2294	2868	2500	3125

Standby 163/27						
Winding Number	312					
Volts	416		440		480	
Model	kW	kVA	kW	kVA	kW	kVA
S7L1D-C41	1456	1820	1556	1945	1620	2025
S7L1D-D41	1555	1944	1660	2075	1730	2162
S7L1D-E41	1575	1969	1665	2081	1810	2263
S7L1D-F41	1775	2219	1895	2369	1975	2469
S7L1D-G41	2005	2506	2140	2675	2230	2787
S7L1D-H41	2075	2594	2175	2719	2360	2950
S7L1D-J41	2230	2787	2350	2938	2560	3200

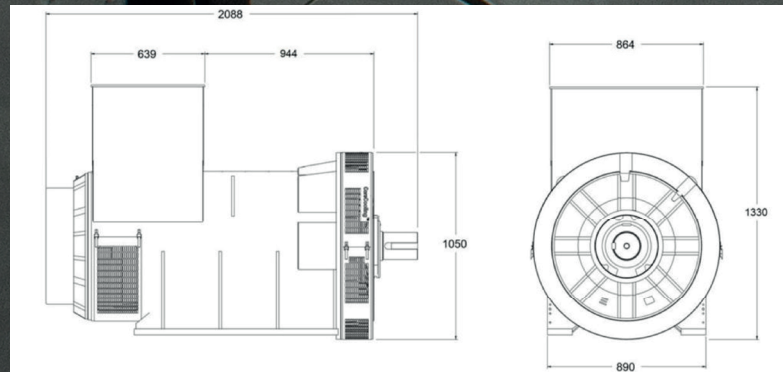

Specification

MODEL	S7-Dedicated
Ratings at 50Hz (kVA) Class H	1505-2500
Ratings at 60Hz (kVA) Class H	1706-3000
Specifications	
Voltage Range	380-480
Poles	4
Technology	Wire Wound
AVR	Analogue
Voltage Sensing	2 Phase
Bearing Arrangement	Single
SAE Adaptors	SAE 0
Terminals	6
Material Insulation Class	H
Excitation System	MX341/PMG
Ingress Protection	IP23
Connection with other machines	Paralleling capability
Optional Features	
Bearing Arrangement	Double
SAE Adaptors	SAE 00
Ingress Protection	IP44 Terminal Box
	IP44
Voltage Sensing	3 Phase sensing
Temperature Monitoring	Winding RTDs
Temperature Monitoring	Thermistors
Environmental Protection	Anti-Condensation Heater
Adaptor Feet	X
Flexible Feet	✓
Prime Movers	
Diesel Engine	✓
Gas Engine	✓

Accessories

Factory Build Options
Anti-Condensation Heater
Quadrature Droop Kit
Bearing RTD (Each Bearing)
Air Inlet Filter
Drip Proof Louvres
Remote Voltage Trimmer
Radio Frequency Interference (RFI) Suppressor Kit
Excitation Loss Module
Diode Failure Detector

Available With	MX322	MX341
Current Sensing Kit	✓	✓
Controlled Short Circuit	✓	X
Manual Voltage Regulator	✓	✓
Frequency Detection Module	✓	✓
Power Factor Controller - PFC3	✓	✓
Remote Control Interface	✓	✓
Excitation Circuit Breaker	✓	✓
Dual AVR	X	X

Voltage Regulator Options	PMG
UL MX341	✓
UL MX322	✓
DECS 150	✓
No AVR	✓

*GA Drawings are indicative of S7-J core dimensions


**Please contact our applications department for additional voltages that are available

***Ratings are preliminary and are subject to change

NOW WITH
3 YEARS
WARRANTY



PRODUCT HERITAGE

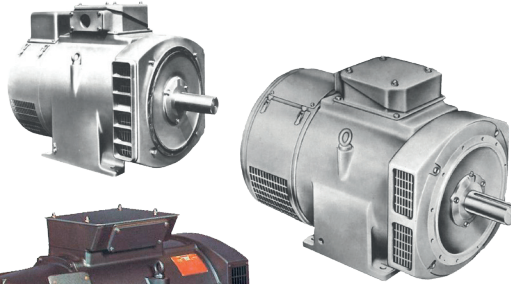

1973

World's
First alternator
to utilise a PMG
for AVR excitation




1950

World's
First regulating
alternator
produced



1966
C Range



1966


World's First
volume produced
brushless
alternator




1973
AC Range


1958

World's First
rotating field
alternator
produced

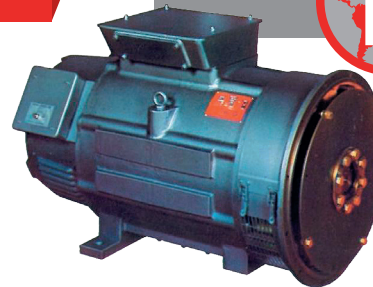



1988
UC Range



2004
P7 Range



2007
P0/P1
Range



2016
S Range




2019
S7 Range



2016
S0/S1
Range



2017
S6 Range



2019
S9 Range



1985
HC Range



1992
BC Range

For more information visit us at
stamford-avk.com



Follow us @stamfordavk



/company/stamfordavk



STAMFORDAvK



youtube.com/stamfordavk

Copyright 2019, Cummins Generator Technologies Ltd. All rights reserved.
STAMFORD is a registered trademark of Cummins Generator Technologies Ltd.

Part No. PB_S7_EN/HP_Rev.1



**Generator
Technologies**