

STAMFORD®


S7L1M-D4 Wdg.13 - Technical Data Sheet

Standards

STAMFORD industrial alternators meet the requirements of the relevant parts of the IEC 60034 and the relevant sections of other international standards such as BS5000-3, ISO 8528-3, VDE 0530, NEMA MG1-32, CSA C22.2-100 and AS 60034. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

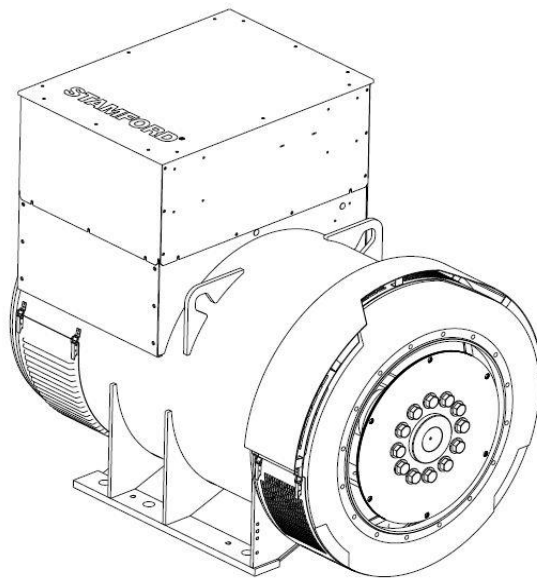

Excitation and Voltage Regulators

Excitation System					
AVR Type	MX322	DECS100	DECS150		
Voltage Regulation	± 0.5%	± 0.25%	± 0.25%		with 4% Engine Governing
AVR Power	PMG	PMG	PMG		

No Load Excitation Voltage (V)	14.7
No Load Excitation Current (A)	0.65
Full Load Excitation Voltage (V)	58
Full Load Excitation Current (A)	2.5
Exciter Time Constant (seconds)	0.125

STAMFORD®

S7L1M-D4 Wdg.13

Electrical Data				
Insulation System	H			
Stator Winding	Double Layer Concentric			
Winding Pitch	2/3			
Winding Leads	6			
Winding Number	13			
Number of Poles	4			
IP Rating	IP23			
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others			
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%			
Short Circuit Ratio	1/Xd			
Steady State X/R Ratio	24.69			
60 Hz				
Telephone Interference	TIF<50			
Cooling Air Flow	3.16 m³/sec			
Voltage Star (V)	380	400	416	-
Voltage Parallel Star (V)	-	-	-	-
Voltage Delta (V)	-	-	-	-
kVA Base Rating (Class H) for Reactance Values (kVA)	1640	1694	1694	-
Saturated Values in Per Unit at Base Ratings and Voltages				
Xd Dir. Axis Synchronous	2.89	2.69	2.49	-
X'd Dir. Axis Transient	0.20	0.18	0.17	-
X''d Dir. Axis Subtransient	0.14	0.13	0.12	-
Xq Quad. Axis Reactance	1.91	1.79	1.65	-
X''q Quad. Axis Subtransient	0.20	0.18	0.17	-
XL Stator Leakage Reactance	0.09	0.08	0.07	-
X2 Negative Sequence Reactance	0.17	0.15	0.14	-
X0 Zero Sequence Reactance	0.03	0.03	0.03	-
Unsaturated Values in Per Unit at Base Ratings and Voltages				
Xd Dir. Axis Synchronous	3.47	3.23	2.99	-
X'd Dir. Axis Transient	0.23	0.21	0.20	-
X''d Dir. Axis Subtransient	0.16	0.15	0.14	-
Xq Quad. Axis Reactance	1.97	1.84	1.70	-
X''q Quad. Axis Subtransient	0.23	0.22	0.20	-
XL Stator Leakage Reactance	0.10	0.09	0.08	-
Xlr Rotor Leakage Reactance	0.21	0.19	0.18	-
X2 Negative Sequence Reactance	0.20	0.18	0.17	-
X0 Zero Sequence Reactance	0.04	0.04	0.03	-

STAMFORD

S7L1M-D4 Wdg.13




Time Constants (Seconds)		
T'd Transient Time Const.		0.161
T''d Sub-Transient Time Const.		0.014
T'do O.C. Field Time Const.		4.060
Ta Armature Time Const.		0.035
T''q Sub-Transient Time Const.		0.0098
Resistances in Ohms (Ω) at 22°C		
Stator Winding Resistance (Ra), per phase for series connected		0.00079
Rotor Winding Resistance (Rf)		1.82
Exciter Stator Winding Resistance		22.3
Exciter Rotor Winding Resistance per phase		0.065
PMG Phase Resistance (Rpmg) per phase		1.91
Positive Sequence Resistance (R1)		0.0010
Negative Sequence Resistance (R2)		0.0011
Zero Sequence Resistance (R0)		0.0010
Saturation Factors		416V
SG1.0		0.229
SG1.2		1.638
Mechanical Data		
Shaft and Keys	All alternator rotors are dynamically balanced to better than ISO 21940-11 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearing
SAE Adaptor	SAE0, 00	SAE0, 00
Moment of Inertia	37.2 kgm ²	36.3 kgm ²
Weight Wound Stator	1395kg	1395kg
Weight Wound Rotor	1255kg	1203kg
Weight Complete Alternator	3066kg	3043kg
Shipping weight in a Crate	3115kg	3092kg
Packing Crate Size	200 x 105 x 155(cm)	200 x 105 x 155(cm)
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	-	BALL. 6228
Bearing Non-Drive End	BALL. 6319	BALL. 6319

STAMFORD[®]

S7L1M-D4 Wdg.13

THREE PHASE EFFICIENCY CURVES


60Hz

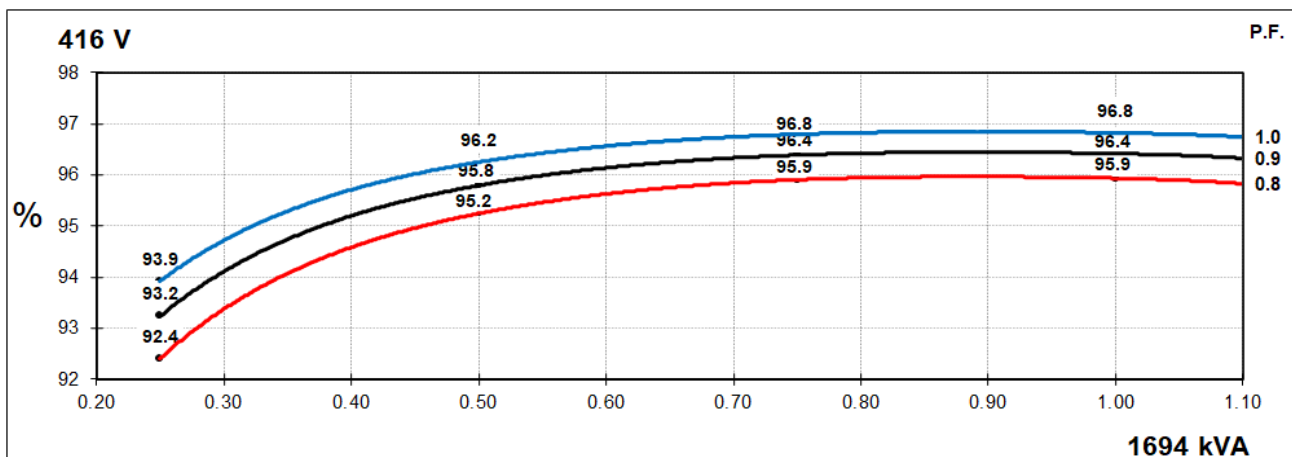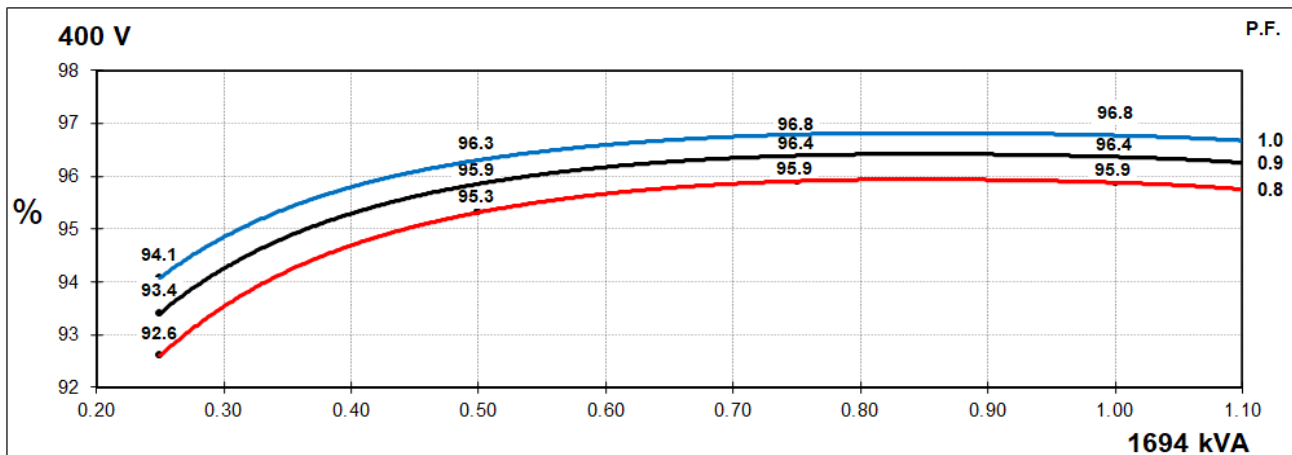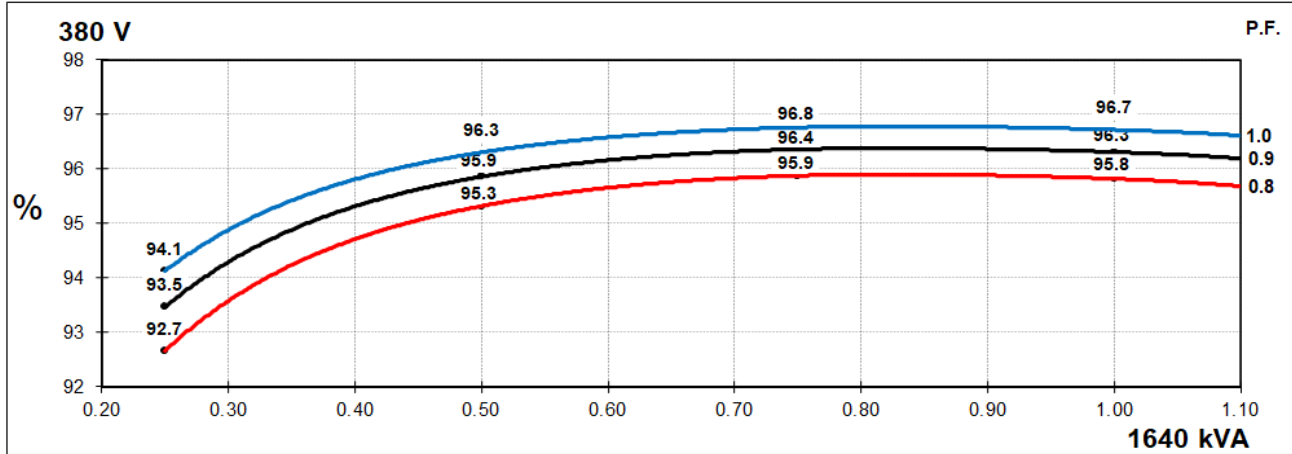

STAMFORD

S7L1M-D4 Wdg.13

Locked Rotor Motor Starting Curves - Separately Excited

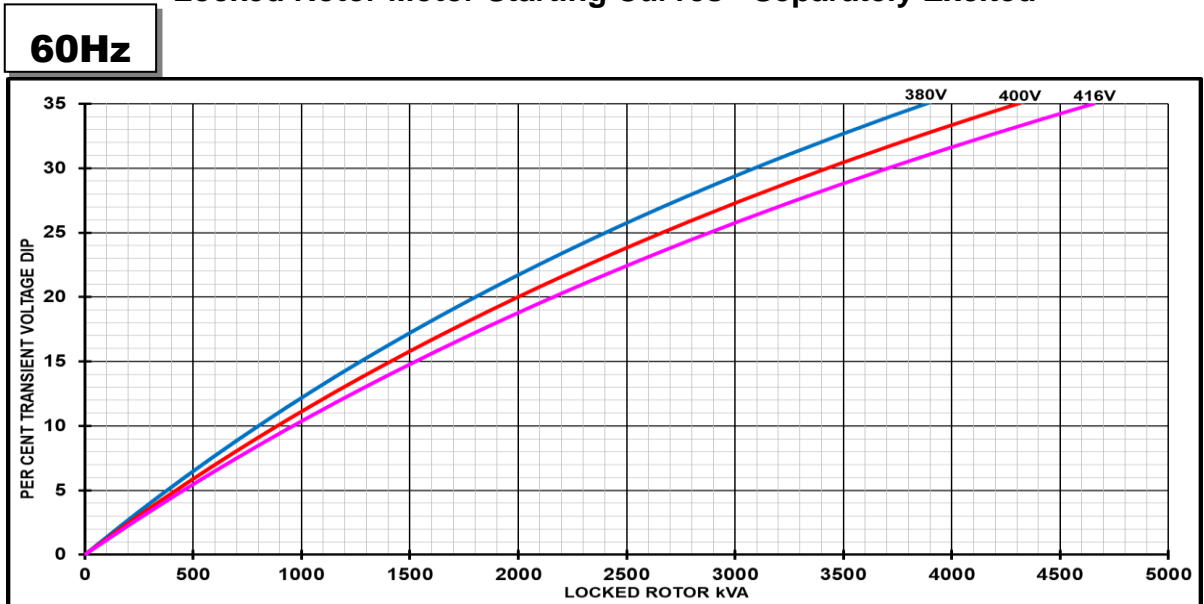

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor	
Lagging PF	Scaling Factor	Lagging PF	Scaling Factor
<= 0.4	1.00	<= 0.4	1.25
0.5	0.95	0.5	1.20
0.6	0.90	0.6	1.15
0.7	0.86	0.7	1.10
0.8	0.83	> 0.7	1.00
0.9	0.75		
0.95	0.70		
1	0.65		


Note: To determine % Transient Voltage Dip or Voltage Rise at various PF, multiply the % Voltage Dip from the curve directly by the Scaling Factor.

STAMFORD®

S7L1M-D4 Wdg.13

Three-phase Short Circuit Decrement Curve - Separately Excited

60Hz

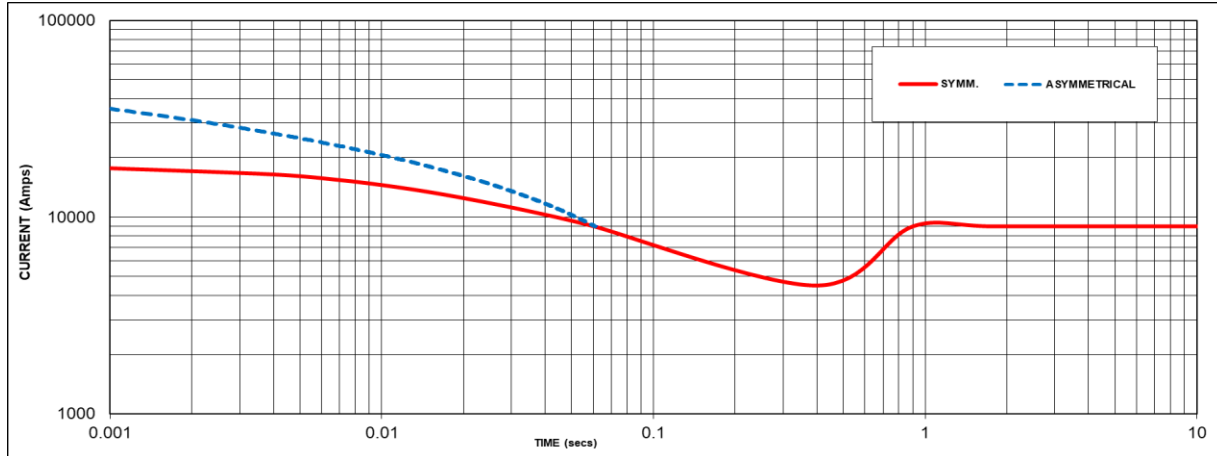

Sustained Short Circuit = 8999 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
-	-	380V	x 1.00
-	-	400V	x 1.05
-	-	416V	x 1.09
-	-	-	-

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

Note 3

All other times are unchanged

Curves are drawn for Star connections under no-load excitation at rated speeds. For other connection (where applicable) the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2


Series Delta = Curve current value X 1.732

STAMFORD

S7L1M-D4 Wdg.13

Typical Alternator Operating Charts

416V/60Hz

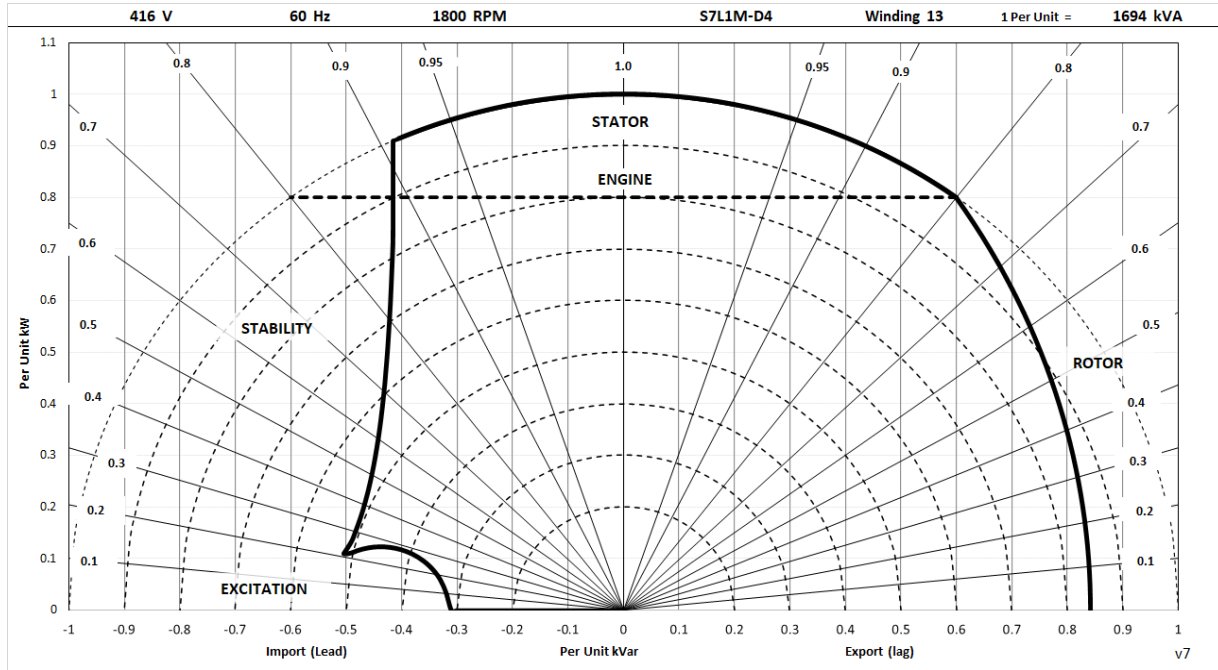

STAMFORD®

S7L1M-D4 Wdg.13

RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby	Cont. H - 110/50°C				Cont. F - 90/50°C				Cont. B - 70/50°C			
50 Hz	Star (V)	N/A	N/A				N/A				N/A			
	Parallel Star (V)	N/A	N/A				N/A				N/A			
	Delta (V)	N/A	N/A				N/A				N/A			
	kVA	N/A	N/A				N/A				N/A			
	kW	N/A	N/A				N/A				N/A			
	Efficiency (%)	N/A	N/A				N/A				N/A			
	kW Input	N/A	N/A				N/A				N/A			

60 Hz	Star (V)	380	400	416	N/A	380	400	416	N/A	380	400	416	N/A	380	400	416	N/A
	Parallel Star (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Delta (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	kVA	N/A	N/A	N/A	N/A	1640	1694	1694	N/A	1570	1570	1570	N/A	1381	1381	1381	N/A
	kW	N/A	N/A	N/A	N/A	1312	1355	1355	N/A	1256	1256	1256	N/A	1105	1105	1105	N/A
	Efficiency (%)	N/A	N/A	N/A	N/A	95.8	95.9	95.9	N/A	95.9	95.9	96.0	N/A	95.9	95.9	96.0	N/A
	kW Input	N/A	N/A	N/A	N/A	1369	1413	1413	N/A	1310	1309	1309	N/A	1152	1152	1151	N/A

De-rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C @ Class H temperature rise (please refer to applications for ambient temperature de-rates at other temperature rise classes)
- For marine alternators, 3% for every 5°C by which the operational ambient temperature exceeds 50°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters (for <690V) or 1500 meters (for >690V) must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

stamford-avk.com

**For Applications Support:
applications@cummins.com**

**For Customer Service:
emea.service@cummins.com**

**For General Enquiries:
Stamford-avk@cummins.com**

Copyright 2022. Cummins Generator Technologies Ltd. All rights reserved.
Cummins and the Cummins logo are registered trade marks of Cummins Inc.
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

