


PI044G - Winding 17

Technical Data Sheet



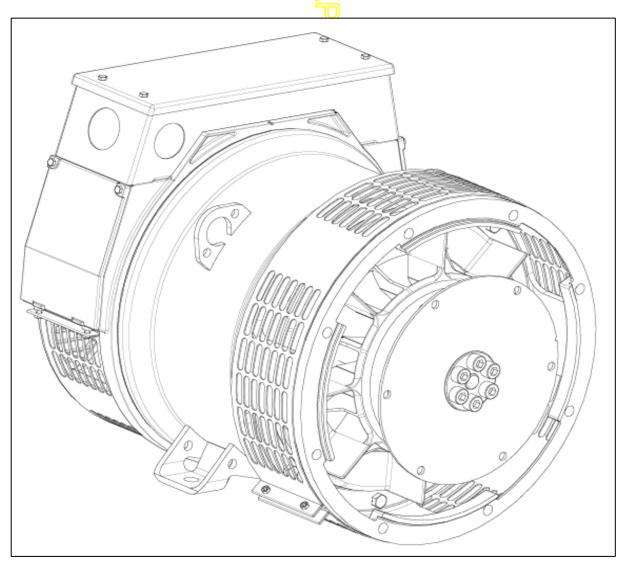

### **SPECIFICATIONS & OPTIONS**

#### **STANDARDS**

Stamford industrial generators meet the requirements of BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100, AS1359. Other standards and certifications can be considered on

other standards and certifications can be considered on request.

#### **VOLTAGE REGULATOR**

#### AS480 AVR fitted as STANDARD

With this self-excited system the main stator provides power via the AVR to the exciter stator. The high efficiency semi-conductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three-phase full-wave bridge rectifier. The rectifier is protected by a surge suppressor against surges caused, for example, by short circuit or out-of-phase paralleling. The AS480 will support limited accessories, RFI suppession remote voltage trimmer and for the P1 range only a 'droop' Current Transformer (CT) to permit parallel operation with other ac generators.

The AVR is can be fitted to either side of the generator in its own housing in the non-drive end bracket.

#### **Excitation Boost System (EBS) (OPTIONAL)**

The EBS is a single, self-contained unit, attached to the non-drive end of the generator.

The EBS unit consists of the Excitation Boost Controller (EBC) and an Excitation Boost Generator (EBG). Under fault conditions, or when the generator is subjected to a large impact load such as a motor starting, the generator voltage will drop. The EBC senses the drop in voltage and engages the output power of the EBG. This additional power feeds the generator's excitation system, supporting the load until breaker discrimination can remove the fault or enable the generator to pick up a motor and drive the voltage recovery.

#### WINDINGS & ELECTRICAL PERFORMANCE

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches, when in parallel with the mains. A fully connected damper winding reduces oscillations during paralleling. This winding, with the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

#### TERMINALS & TERMINAL BOX

Standard generators are 3-phase reconnectable with 12 ends brought out to the terminals, which are mounted at the non-drive end of the generator. Dedicated single phase generators are also available. A sheet steel terminal box contains provides ample space for the customers' wiring and gland arrangements. Alternative terminal boxes are available for customers who want to fit additional components in the terminal box.

#### SHAFT & KEYS

All generator rotors are dynamically balanced to better than BS6861:Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.

#### INSULATION / IMPREGNATION

The insulation system is class 'H'.

All wound components are impregnated with materials and processes designed specifically to provide the high build required for static windings and the high mechanical strength required for rotating components.

#### QUALITY ASSURANCE

Generators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

The stated voltage regulation may not be maintained in the presence of certain radio transmitted signals. Any change in performance will fall within the limits of Criteria B' of EN 61000-6-2:2001. At no time will the steady-state voltage regulation exceed 2%.

#### DE RATES

All values tabulated on page 6 are subject to the following reductions

5% when air inlet filters are fitted.

3% for every 500 metres by which the operating altitude exceeds 1000 metres above mean sea level.

3% for every 5°C by which the operational ambient temperature exceeds 40°C.

Note: Requirement for operating in an ambient exceeding 60°C must be referred to the factory.

#### 5% For reverse rotation

(Standard rotation CW when viewed from DE)

NB Continuous development of our products entitles us to change specification details without notice, therefore they must not be regarded as binding.

Front cover drawing typical of product range.

# STAMFORD




### WINDING 17

CONTROL SYSTEM	STANDARD AS480 AVR	(SELF EXCITED)			
VOLTAGE REGULATION	± 1.0 %	<u> </u>			
SUSTAINED SHORT CIRCUIT	SELF EXCITED MACHINES DO NOT SUSTAIN A SHORT CIRCUIT CURRENT				
CONTROL SYSTEM	AS480 AVR WITH OPTIONAL EXCITATION BOOST SYSTEM (EBS)				
SUSTAINED SHORT CIRCUIT	REFER TO SHORT CIRCUIT DECREMENT CURVE (page 5)				
INSULATION SYSTEM	CLASS H				
PROTECTION	IP23				
RATED POWER FACTOR	0.8				
STATOR WINDING	DOUBLE LAYER CONCENTRIC				
WINDING PITCH	TWO THIRDS				
WINDING LEADS	12				
STATOR WDG. RESISTANCE	0.951 Ohms PER PHASE AT 22°C SERIES STAR CONNECTED				
ROTOR WDG. RESISTANCE	0.551 Ohms at 22°C				
EXCITER STATOR RESISTANCE	18.5 Ohms at 22°C				
EXCITER ROTOR RESISTANCE	0.228 Ohms PER PHASE AT 22°C				
EBS STATOR RESISTANCE	12.9 Ohms at 22°C				
R.F.I. SUPPRESSION	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. refer to factory for others				
WAVEFORM DISTORTION	NO LOAD 1.5% NON-DISTORTING LINEAR LOAD < 5.0%				
MAXIMUM OVERSPEED	2250 Rev/Min				
BEARING DRIVE END	BALL. 6309-2RS (ISO)				
BEARING NON-DRIVE END	BALL. 6306-2RS (ISO)				
	1 BEARI <mark>NG</mark>		2 BEARING		
	WITH EBS	WITHOUT EBS	WITH EBS	WITHOUT EBS	
WEIGHT COMP. GENERATOR	96 kg	94.3 kg	99 kg	97.3 kg	
WEIGHT WOUND STATOR	36 kg	🔘 36 kg	36 kg	36 kg	
WEIGHT WOUND ROTOR	34.94 kg	33.24 kg	35.94 kg	34.24 kg	
WR <sup>2</sup> INERTIA	0.1266 kgm <sup>2</sup>	0.1249 kgm <sup>2</sup>	0.1267 kgm <sup>2</sup>	0.125 kgm <sup>2</sup>	
SHIPPING WEIGHTS in a crate	112 kg	110.3 kg	121 kg	119.3 kg	
PACKING CRATE SIZE	71 x 51 x 67 (cm) 71 x 51 x 67 (cm)		x 67 (cm)		
TELEPHONE INTERFERENCE	THF<2% TIF<50			<50	
COOLING AIR	0.135 m³/sec 286 cfm				
VOLTAGE SERIES STAR	600				
kVA BASE RATING FOR REACTANCE VALUES	18.8				
Xd DIR. AXIS SYNCHRONOUS	1.8				
X'd DIR. AXIS TRANSIENT	0.19				
X"d DIR. AXIS SUBTRANSIENT	0.13				
Xq QUAD. AXIS REACTANCE	0.87				
X"q QUAD. AXIS SUBTRANSIENT	0.19				
XL LEAKAGE REACTANCE	0.07				
X2 NEGATIVE SEQUENCE	0.16				
X0 ZERO SEQUENCE	0.08				
REACTANCES ARE SATUR	RATED	VALUES ARE PER UN	IT AT RATING AND VOLTA	GE INDICATED	
T'd TRANSIENT TIME CONST.		0.0	)12 s		
T"d SUB-TRANSTIME CONST.	0.003 s				
T'do O.C. FIELD TIME CONST.	0.26 s				
Ta ARMATURE TIME CONST.	0.007 s				
SHORT CIRCUIT RATIO	1/Xd				



## Winding 17 Locked Rotor Motor Starting Curves


## AS480 AVR Without EBS

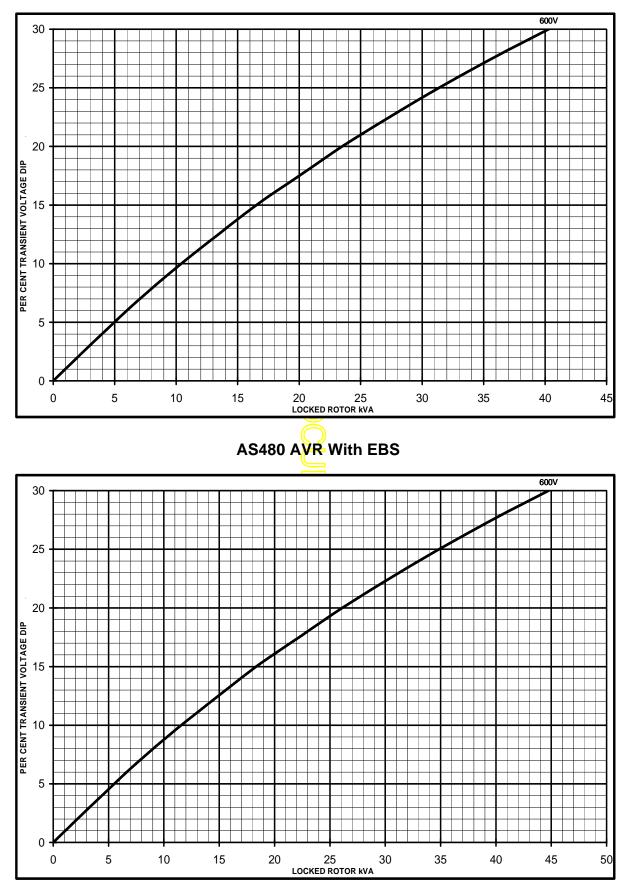




Winding 17

### THREE PHASE EFFICIENCY CURVES

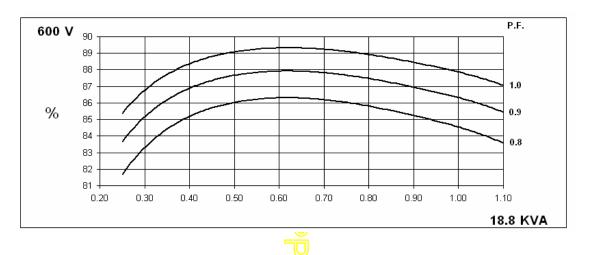

Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed Based on star (wye) connection.

WITH EBS FITTED

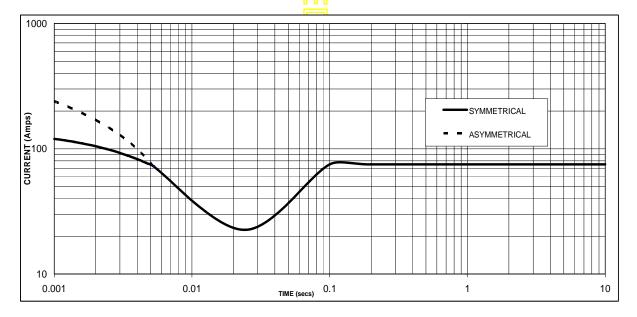

Sustained Short Circuit = 75 Amps

#### Note

The following multiplication factor should be used to convert the values from curve for the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.


All other times are unchanged



Winding 17 / 0.8 Power Factor

# **60**Hz

### RATINGS

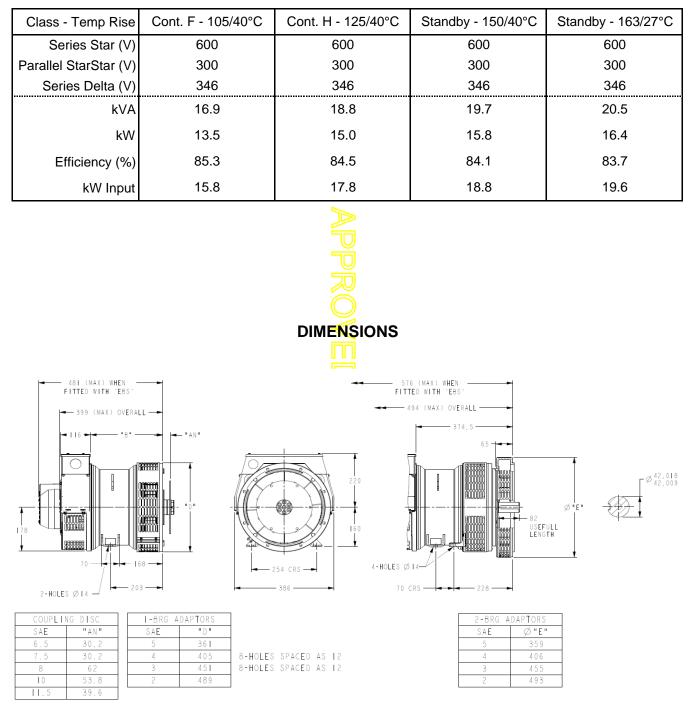





Head Office Address: Barnack Road, Stamford Lincolnshire, PE9 2NB United Kingdom Tel: +44 (0) 1780 484000 Fax: +44 (0) 1780 484100

www.cumminsgeneratortechnologies.com

Copyright 2010, Cummins Generator Technologies Ltd, All Rights Reserved Stamford and AvK are registered trade marks of Cummins Generator Technologies Ltd Cummins and the Cummins logo are registered trade marks of Cummins Inc.