


STAMFORD®

N200G4 Wdg. 312/311

N200G4 - Technical Data Sheet

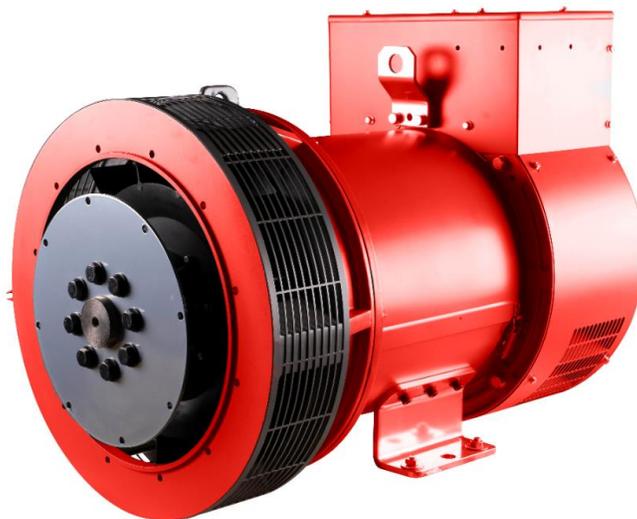

STAMFORD® N range is the three-phase, four-pole synchronous AC generators of brushless design, providing optimized and reliable power for standby and other applications.

Standards

STAMFORD® N range industrial alternators meet the requirements of IEC 60034-1 and ISO 8528-3.

Quality Assurance

STAMFORD® N range alternators are designed, built, and tested to the quality assurance level of ISO9001.

Excitation System

The excitation system is self-excited as standard with power being provided by the main stator via the digital Automatic Voltage Regulator (AVR) to the exciter stator.

The exciter rotor output is fed to the main rotor through a three-phase full wave bridge rectifier. The digital Automatic Voltage Regulator is two-phase voltage sensed and will control the alternator output voltage to within $\pm 1\%$.

Terminal Box

STAMFORD® N range alternators feature a main stator with six/twelve ends brought out to the terminal box, which is located at the non-drive end of the alternator. The terminal box contains the AVR and provides easily accessible wiring connection points.

Shaft and Rotor

All STAMFORD® N range alternators are single bearing with applicable SAE engine interface housing and drive disc. The rotor poles are provided with damper cage as standard.

Insulation/ Impregnation

All STAMFORD® N range generators utilize a Class H insulation system.

Every wound component is impregnated with materials and processes designed specifically to provide protection against the challenging environments often encountered in generator operation.

STAMFORD®

N200G4 Wdg. 312/311

N200G4 - Technical Data Sheet

Technical Specifications	
Number of Phases	3
Number of Poles	4
Insulation System	Class H
Stator Winding	2/3 rd Pitch
Number of Leads	6/12
Winding Number	312/311
IP Rating	IP23
Voltage Regulation	± 1%
Total Harmonic Distortion (THD)	No Load < 2.5%; Non-Distorting Balanced Linear Load < 5%
Excitation System	Brushless, Self-Excited
Regulator Type	DM730
Nominal Speed	1500RPM at 50Hz, 1800RPM at 60Hz
Overspeed	2250RPM
Bearing	Single Bearing
Weight	541kg
Overload	110% of rated power for 1 hour in a 6-hour cycle
Electromagnetic Compatibility	EN61000-6-2, EN61000-6-4

Electrical Ratings (0.8 – 1.0 PF)

Class – Temp Rise		Cont. H - 125/40°C			Standby - 150/40°C			Standby - 163/27°C		
50 Hz	Voltage	380	400	415	380	400	415	380	400	415
	Voltage P-star*	190	200	208	190	200	208	190	200	208
	kVA	190	200	200	201	212	212	209	220	220
	kW	152	160	160	161	170	170	167	176	176

Class – Temp Rise		Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
60 Hz	Voltage	380	416	440	480	380	416	440	480	380	416	440	480
	Voltage P-star*	190	208	220	240	190	208	220	240	190	208	220	240
	kVA	200	217	230	250	211	230	244	265	220	238	253	275
	kW	160	174	184	200	169	184	195	212	176	190	202	220

*P-star connection only available with 12 leads winding option

STAMFORD®








N200G4 Wdg. 312/311

N200G4 - Technical Data Sheet

Three Phase Efficiency Curves

50Hz

60Hz

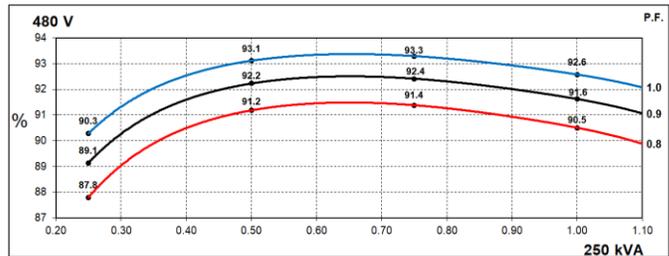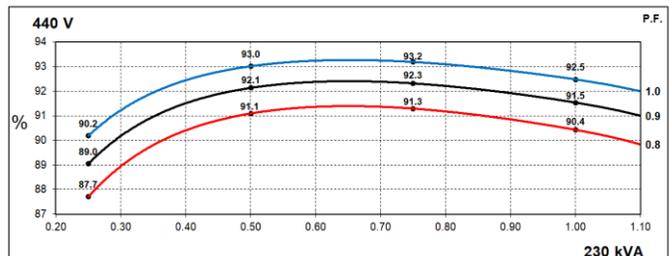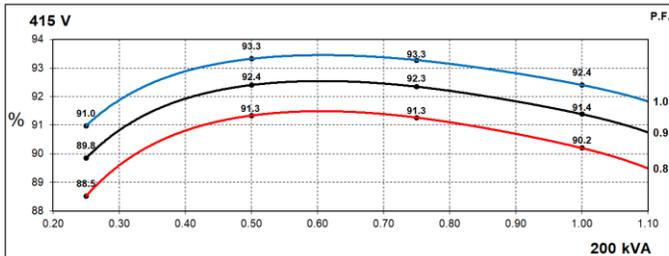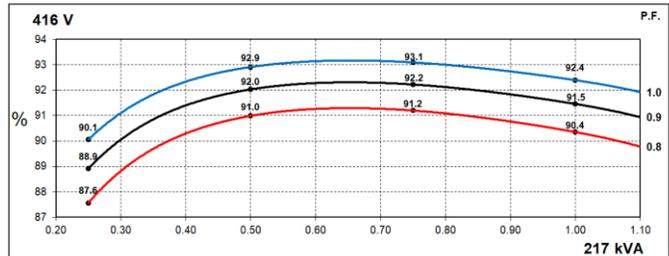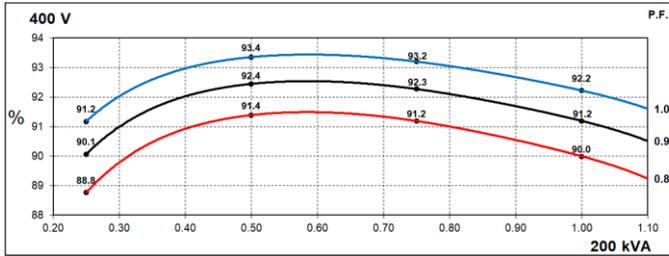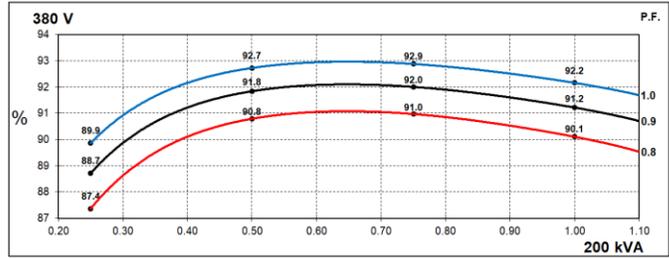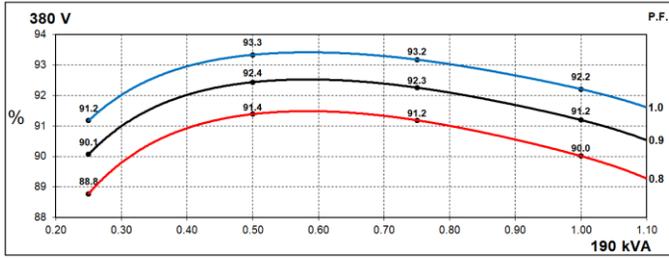


STAMFORD®

N200G4 Wdg. 312/311

N200G4 - Technical Data Sheet

Overall Dimensions

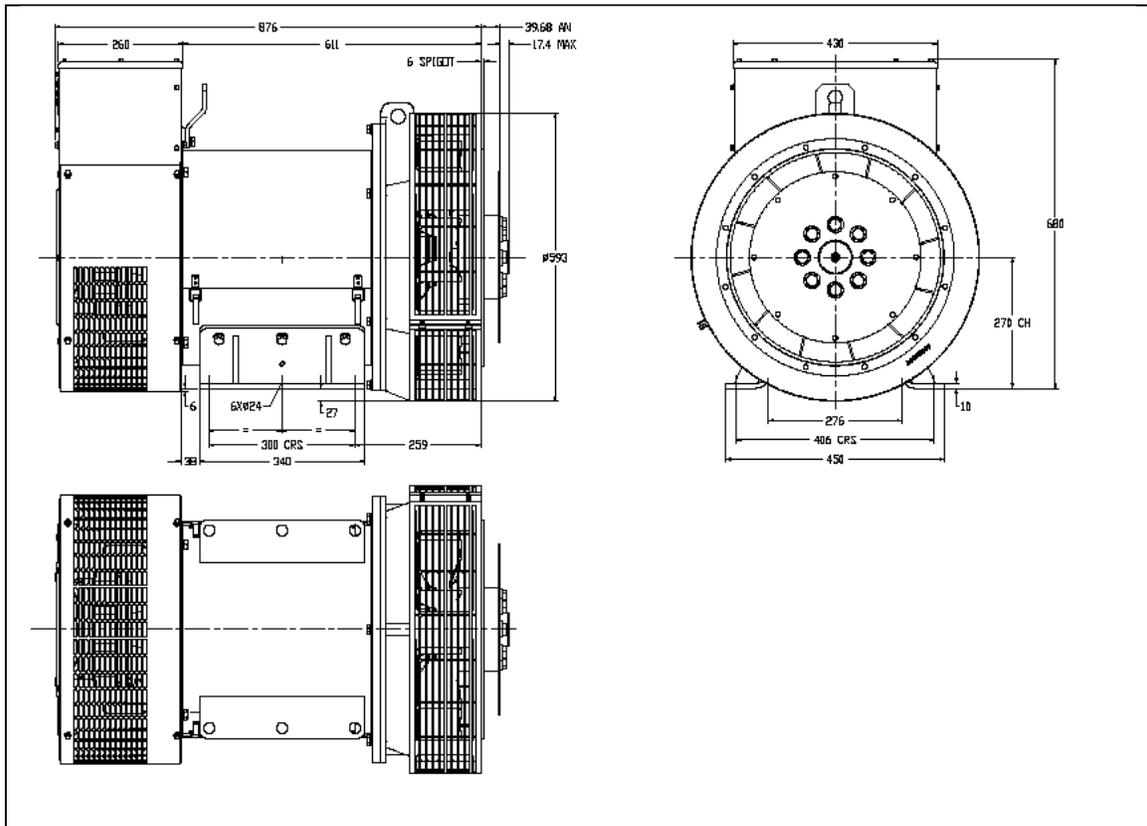

Output Power De-rates

The output power ratings are subjected to the following ambient temperature de-rates:

- 3% for every 5°C by which the operational ambient temperature exceeds 40°C, up to max. 60°C

The output power ratings are subjected to the following altitude de-rates:

- 3% for every 500 meters by which the altitude exceeds 1000 meters above mean sea level.

Follow us @stamfordavk

/company/stamfordavk

STAMFORDAvK

stamfordavk

www.stamford-avk.com



©Copyright 2020, Cummins Generator Technologies Ltd. All Rights Reserved
Cummins and the Cummins logo are registered marks of Cummins Inc.

NEWAGE | STAMFORD I AvK is a registered trademark of Cummins Generator Technologies Ltd