


DL15-12625

ISSUE
A

IF IN DOUBT-ASK

DO NOT SCALE

FIRST W.O.

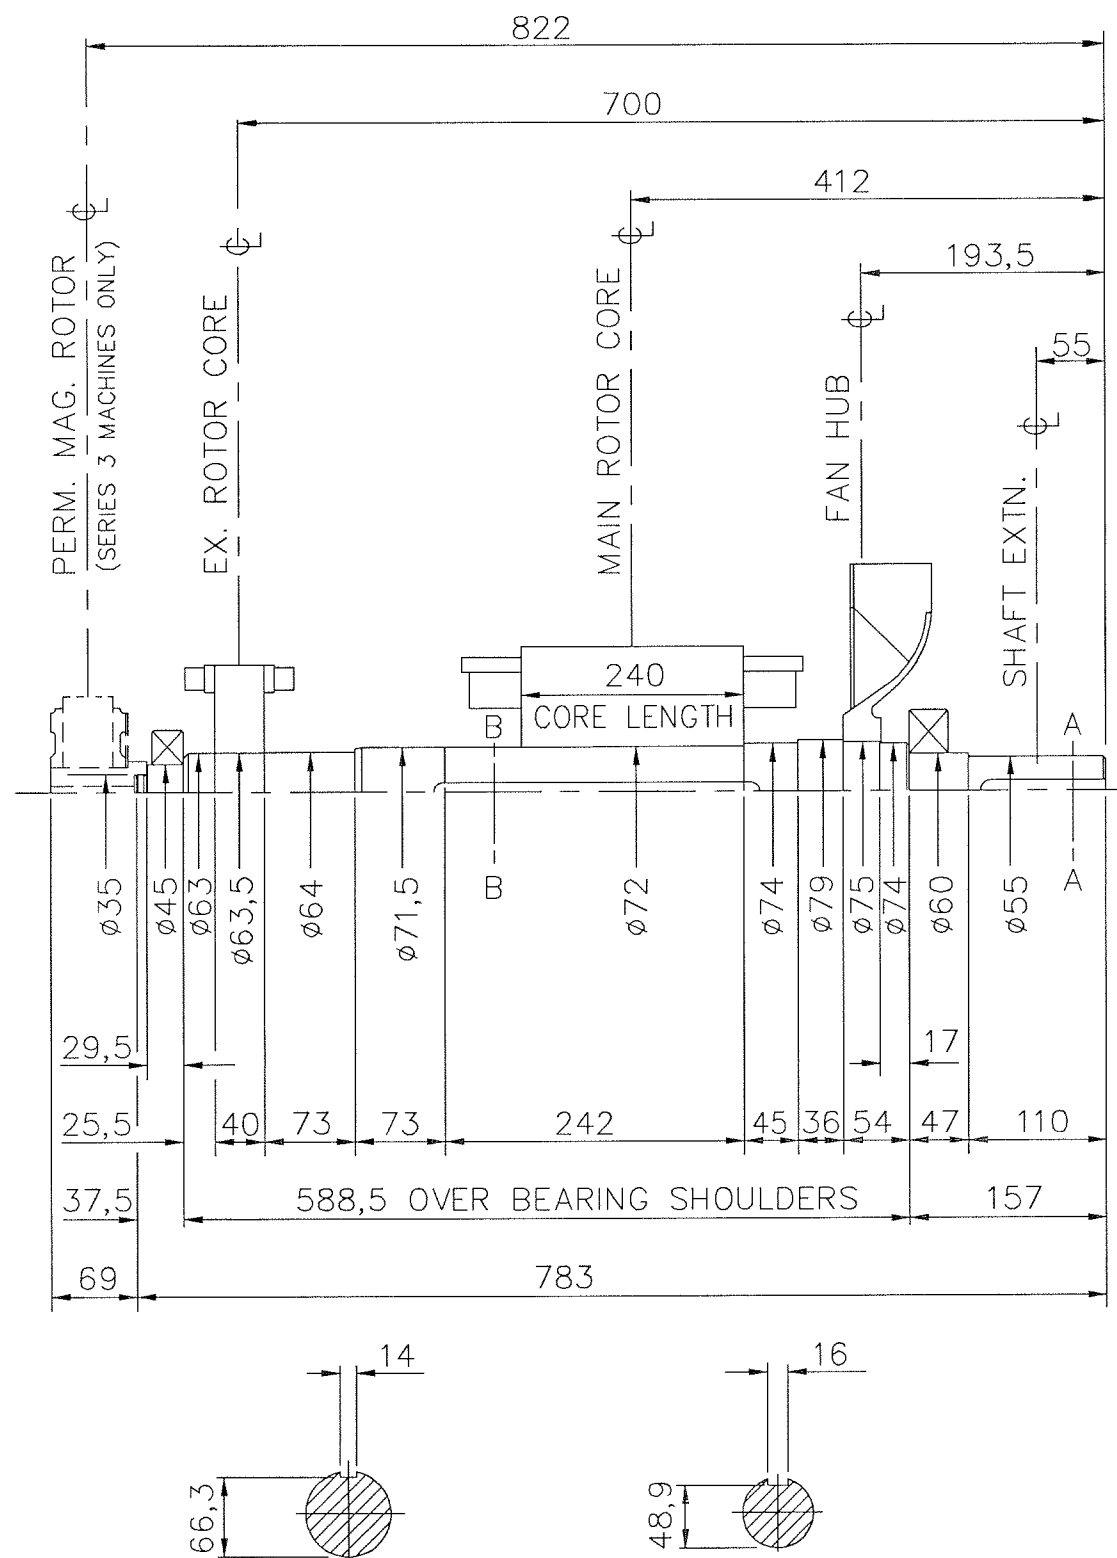

SECTION B-B

SECTION A-A

NOTES !

SHAFT STIFFNESS :-
THE STIFFNESS OF THE SHAFT BETWEEN THE MAIN ROTOR CORE ϕ AND THE SHAFT EXTENSION ϕ IS $4,30 \times 10^6$ kgcm/radian
(STIFFENING EFFECT OF MAIN ROTOR CORE IS NOT INCLUDED IN THIS FIGURE).

SHAFT MATERIAL:-
STEEL - 080M40 TO BS970 PART 1 (APPROVED BY MARINE AUTHORITIES WHEN APPROPRIATE).
MAXIMUM RECOMMENDED VIBRATORY STRESS LEVEL IN THE SHAFT IS $34,47 \times 10^6$ N/m² FOR A SPEED RANGE OF 0,95 TO 1,1 x NOMINAL SPEED, AND $68,94 \times 10^6$ N/m² FOR RUN THROUGH CONDITIONS, FOR INDUSTRIAL MACHINES. FOR MARINE AUTHORITIES, THEIR APPROPRIATE RULES WILL APPLY.
NEWAGE INTERNATIONAL LTD. SHOULD BE NOTIFIED OF ANY ROTORS NOT COMPLYING WITH THESE RULES.
NEWAGE INTERNATIONAL LTD. BALANCE ROTORS TO COMPLY WITH INTERNATIONAL STD. I.S.O. 1940 GRADE 2,5 AND B.S. 6861 PART 1 GRADE 2,5.
FOR UNBALANCED MAGNETIC PULL (U.M.P.) FORCES REFER TO GENERATOR MANUAL.

COMPONENT	Wt kg	WR ² kgm ²
EX. ROTOR	8,490	0,0508
MAIN ROTOR	64,470	0,4693
FAN	1,940	0,0271
SHAFT	21,971	0,0132
TOTAL	96,871	0,5604
PERM. MAG.	5,450	0,0150
TOTAL	102,321	0,5754

CONVERSION FACTORS		
TO CONVERT	TO	DIVIDE BY
kg	lb	0,453592
kg m ²	lb ft ²	0,04214
kgcm/rad	lbin/rad	1,1521246
N/m ²	lbf/in ²	6894,76

4/2892/5	A	S.M.C.	08.11.00	ORIGINAL ISSUE
MOD'N	ISSUE	DRAWN	DATE	ALTERATION

CERTIFIED PRINT (ONLY IF SIGNED)		
BY		
DATE		
DRAWN	S.M.C.	08.11.00
CH'D	<i>SM</i>	20/11/00
APP'D	<i>SM</i>	20/11/00

UC224F - TWO BEARING
MOMENTS OF INERTIA
AND SHAFT DETAILS

NEWAGE INTERNATIONAL LTD
STAMFORD ENGLAND

SCALE	FIRST W.O.
NTS	
UNIT OF MEASUREMENT MILLIMETRES (mm)	
DL15-12625	ISSUE A