

**Technical Data Sheet for AvK-Alternators**

FM 7.3-5

Date:	30/09/13	Customer:	GENERIC DATASHEET only
Project No.:		AvK Reference:	DSG074M1_4_60_480

**Object data:**

Site:		Prime Mover:	
Application:	Stationary Power Plant	Manufacturer:	

**Generator data:**

Generator:	DSG 74 M1/4	Poles:	4	Standards:	IEC 60034
Rated power:	1680 kVA	1344 kWe	1415 kWm		
Power factor:	0.80				
Power at pf 1,0	1361 kVA	1361 kWe	1415 kWm		
Rated voltage:	0.48 kV				
Speed:	1800 1/min				
Frequency:	60 Hz			Voltage range / frequency range:	
Rated current:	2020.7 A			Zone A according IEC 60034-1 (dU = +/-5%, df = +/-2%)	

Winding pitch:	2/3
----------------	-----

Insulation class:	Stator: Class H	Rotor: Class H	Temperature rise:	H
-------------------	-----------------	----------------	-------------------	---

Ambient temperature:	40 ° C	Environment:	Standard environment
----------------------	--------	--------------	----------------------

Site altitude:	1000 m		
----------------	--------	--	--

Enclosure:	IP23	Filter:	
------------	------	---------	--

Cooling:	IC 01 - Open-circuit ventilation
----------	----------------------------------

Coolant:	Ambient Air	Temperature	40 ° C	Temperature Air inlet	40 ° C
----------	-------------	-------------	--------	-----------------------	--------

		Coolant:		generator:	
--	--	----------	--	------------	--

		Cooling air vol.:	2.9 m³/s	Cooling water quantity:	n/a
--	--	-------------------	----------	-------------------------	-----

Moment of inertia (I):	36.7 kgm²	Weight:	3275 Kg	Losses (environment):	71 KW
------------------------	-----------	---------	---------	-----------------------	-------

		Losses (cooling):	n/a		
--	--	-------------------	-----	--	--

Wires:	4 terminals, starpoint connected in terminal box
--------	--

Operation mode:	Single mode
-----------------	-------------

Regulators:	
-------------	--

Voltage regulator:	DECS 100
--------------------	----------

**Electrical data: (acc. IEC)**

Efficiencies:	110%	100%	75%	50%	25%
Power factor 0.8	94,74	94,99	95,04	94,45	91,46
Power factor 0.9	95,38	95,6	95,52	94,8	91,67
Power factor 1.0	96,02	96,21	96	95,14	91,88

**Reactances and time constants**

	unsaturated	saturated		unsaturated	saturated					
$X_d$	2.79	2.51 p.u.	$X_q$	1.30	1.27 p.u.	$T_{d0'}$	3.192 s	$T_{d0''}$	0.02145 s	
$X_d'$	0.236	0.236 p.u.	$X_q'$	1.30	1.27 p.u.	$T_{d'}$	0.28 s	$T_{q0'}$	0.22 s	
$X_d''$	0.133	0.121 p.u.	$X_q''$	0.150	0.150 p.u.	$T_{d''}$	0.011 s	$T_{q0''}$	0.19067 s	
$X_2$	0.149	0.135 p.u.	$X_0$	0.054	0.049 p.u.	$T_a$	0.0225 s	$T_{q'}$	0.22 s	
$X_{1s}$	n.a.	0.073 p.u.						$T_{q''}$	0.022 s	

Short circuit ratio saturated:	0.4	$Z_n$	0.137 Ohm
--------------------------------	-----	-------	-----------

**Short circuit data:**

Initial short circuit current (3-phase):	$I_k''$	16700 A	
Max. peak current (3-phase):	$I_s$	42511 A	
Sustained short circuit current:	$I_k$	6062 A	Minimum 3 x rated current for max.10 s
Initial short circuit torque:	$M_{k2}$	95.8 kNm	
	$M_{k3}$	57.5 kNm	
Max. faulty synchron moment:	$M_f$	206.0 kNm	
Rated kVA torque:	$M_{SN}$	8.91 kNm	
Rated torque	$M_N$	7.13 kNm	
Shaft torque	$M_{Sh}$	7.51 kNm	


**Load application:**

max. load application: 1068 kVA (corresponds to 63,56 % from 1680 kVA) for Power factor 0.4 15% transient voltage drop	Power: 1680 kVA Power factor: 0.8 transient voltage drop: -19.1 %
---	---

**Remarks:**

<b>Alternator :</b>	<b>DSG 74 M1/4</b>		
Rated output [kVA]	1680	Rated power factor:	0.8
Rated frequency [Hz]	60	Rated speed [rpm]	1800
			Rated voltage [kV]: 0.48


### Wirkungsgrad-Kennlinie - Efficiency Curve

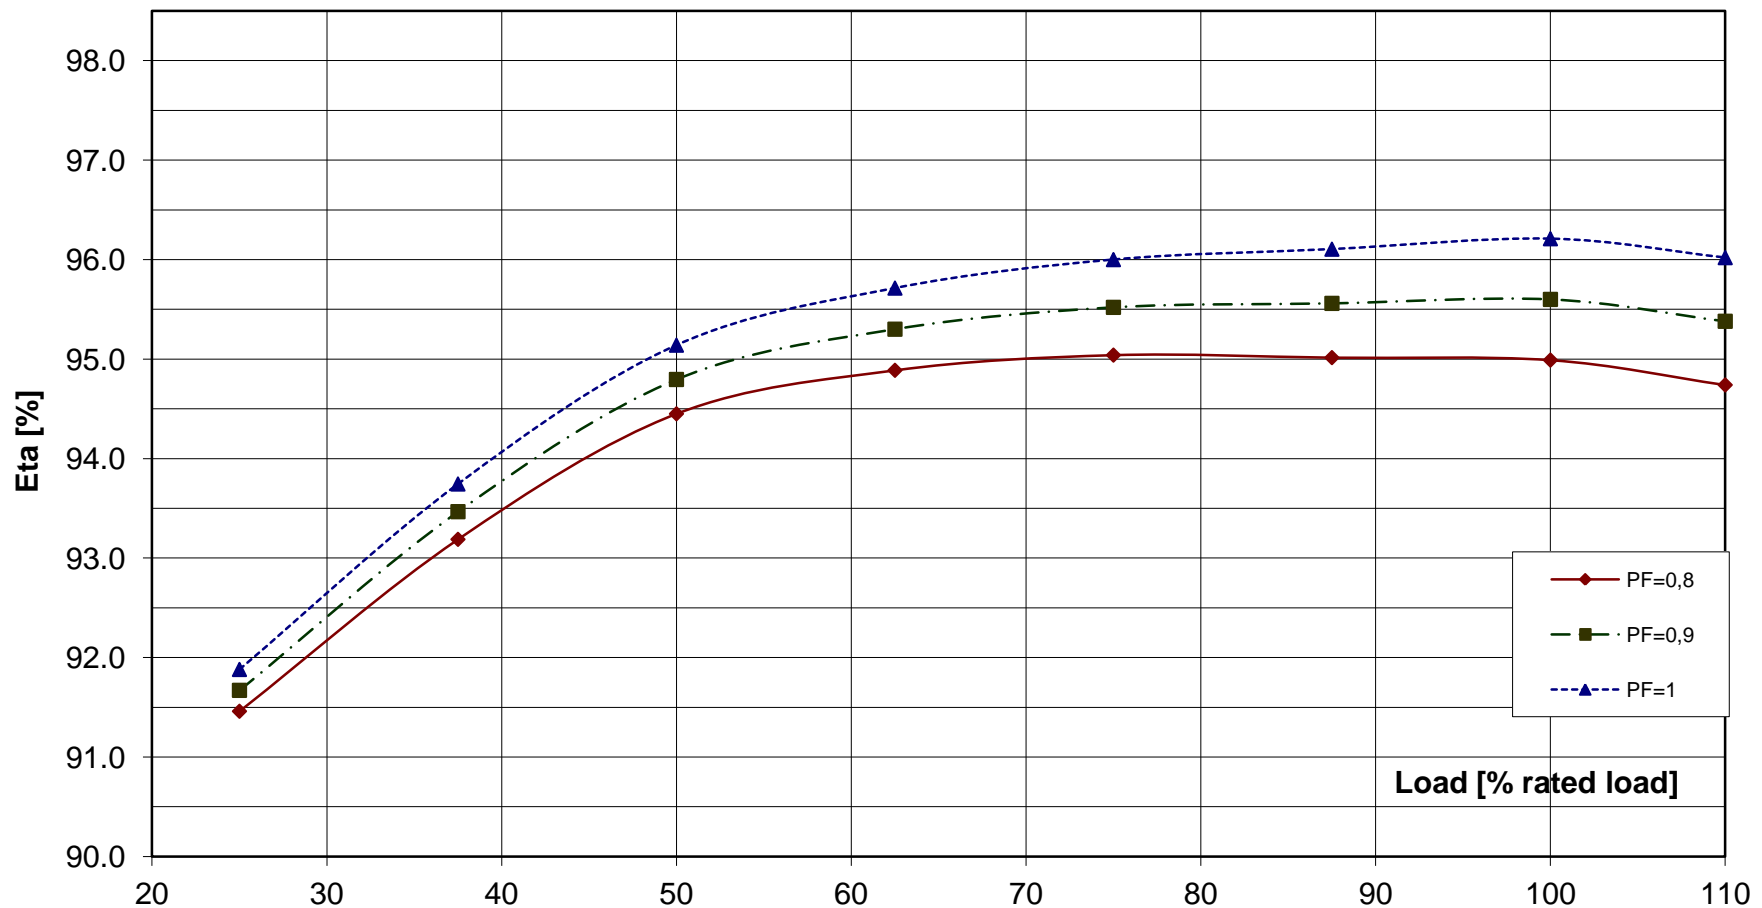

**Alternator : DSG 74 M1/4**

Rated output [kVA]	1680	Rated power factor:	0.8	Rated voltage [kV]:	0.48
Rated frequency [Hz]	60	Rated speed [rpm]	1800		

**Transient Voltage rise or drop for sudden load removal or application**

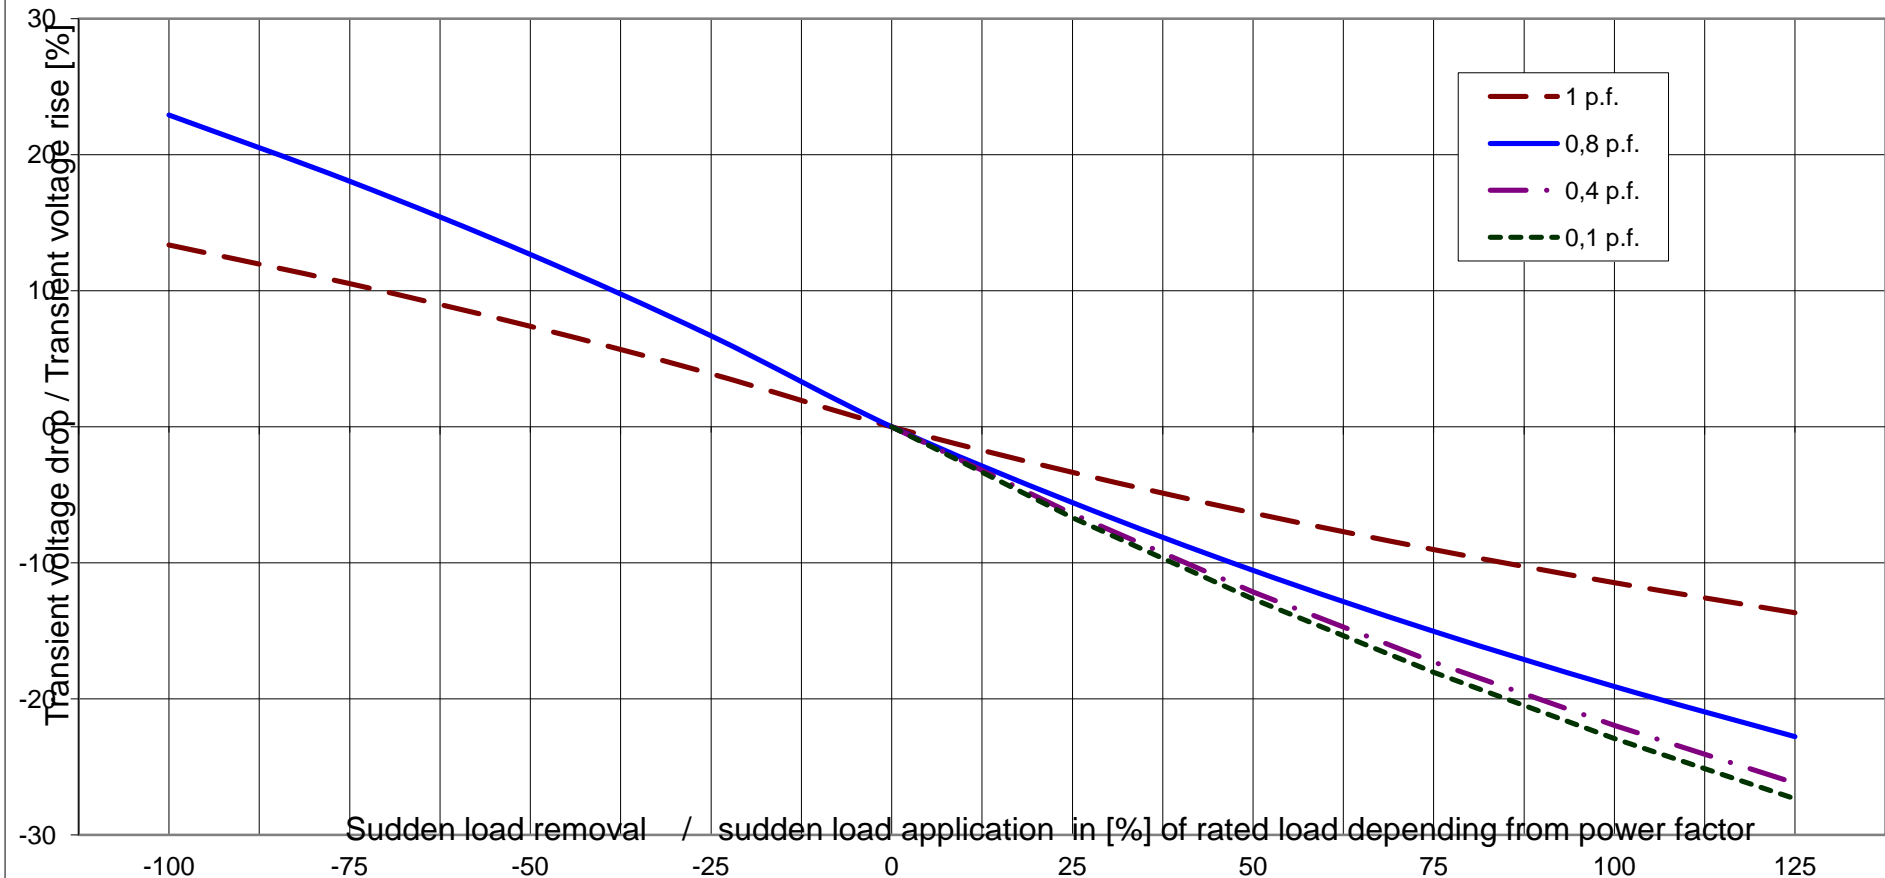




Technisches Datenblatt - Diagramme  
Technical data sheet - Diagrams

ING-FCD-0112

<b>Alternator :</b>	<b>DSG 74 M1/4</b>			
Rated output [kVA]	1680	Rated power factor:	0.8	Rated voltage [kV]: 0.48
Rated frequency [Hz]	60	Rated speed [rpm]	1800	MSN related to kVA: 8.91 KNm

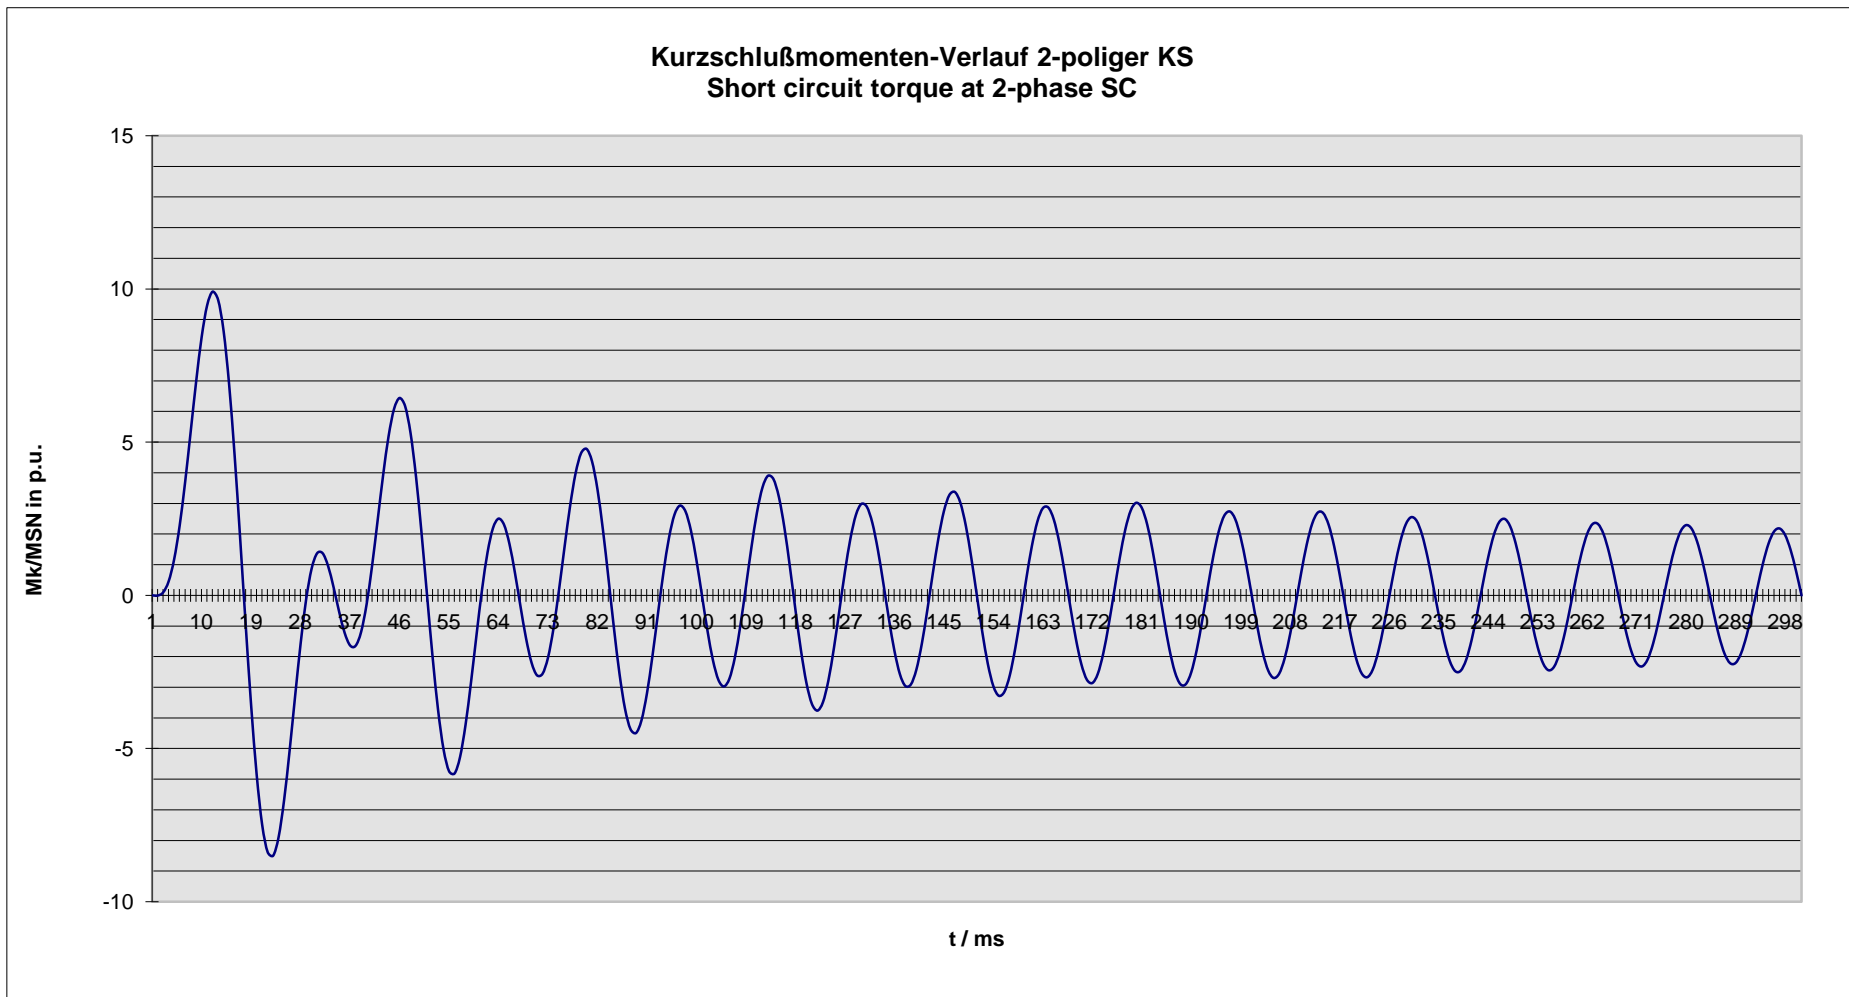

**Nenndaten / nominal data**

**DSG 74 M1/4**

Leistung  $S_N$ : **1680 kVA**

$\cos \varphi$ : **0.80**

*Rating*

*p.f.*

Spannung  $U_N$ : **0.48 kV**

Strom  $I_N$ : **2021 A**

*Voltage*

*Current*

Frequenz  $f$ : **60 Hz**

Drehzahl  $n$ : **1,800 min<sup>-1</sup>**

*Frequency*


*Speed*

Schutzart **IP23**

*Protection*

Kurzschlussstrom  $I_{k3\text{phasig}} / I_N$  [p.u.]  
 Short-circuit current  $I_{k3\text{phase}} / I_N$  [p.u.]

**Stosskurzschluss-Strom, 3-phasig, asymmetrisch /**  
*Sudden short circuit current, 3-phase, asymmetrical*

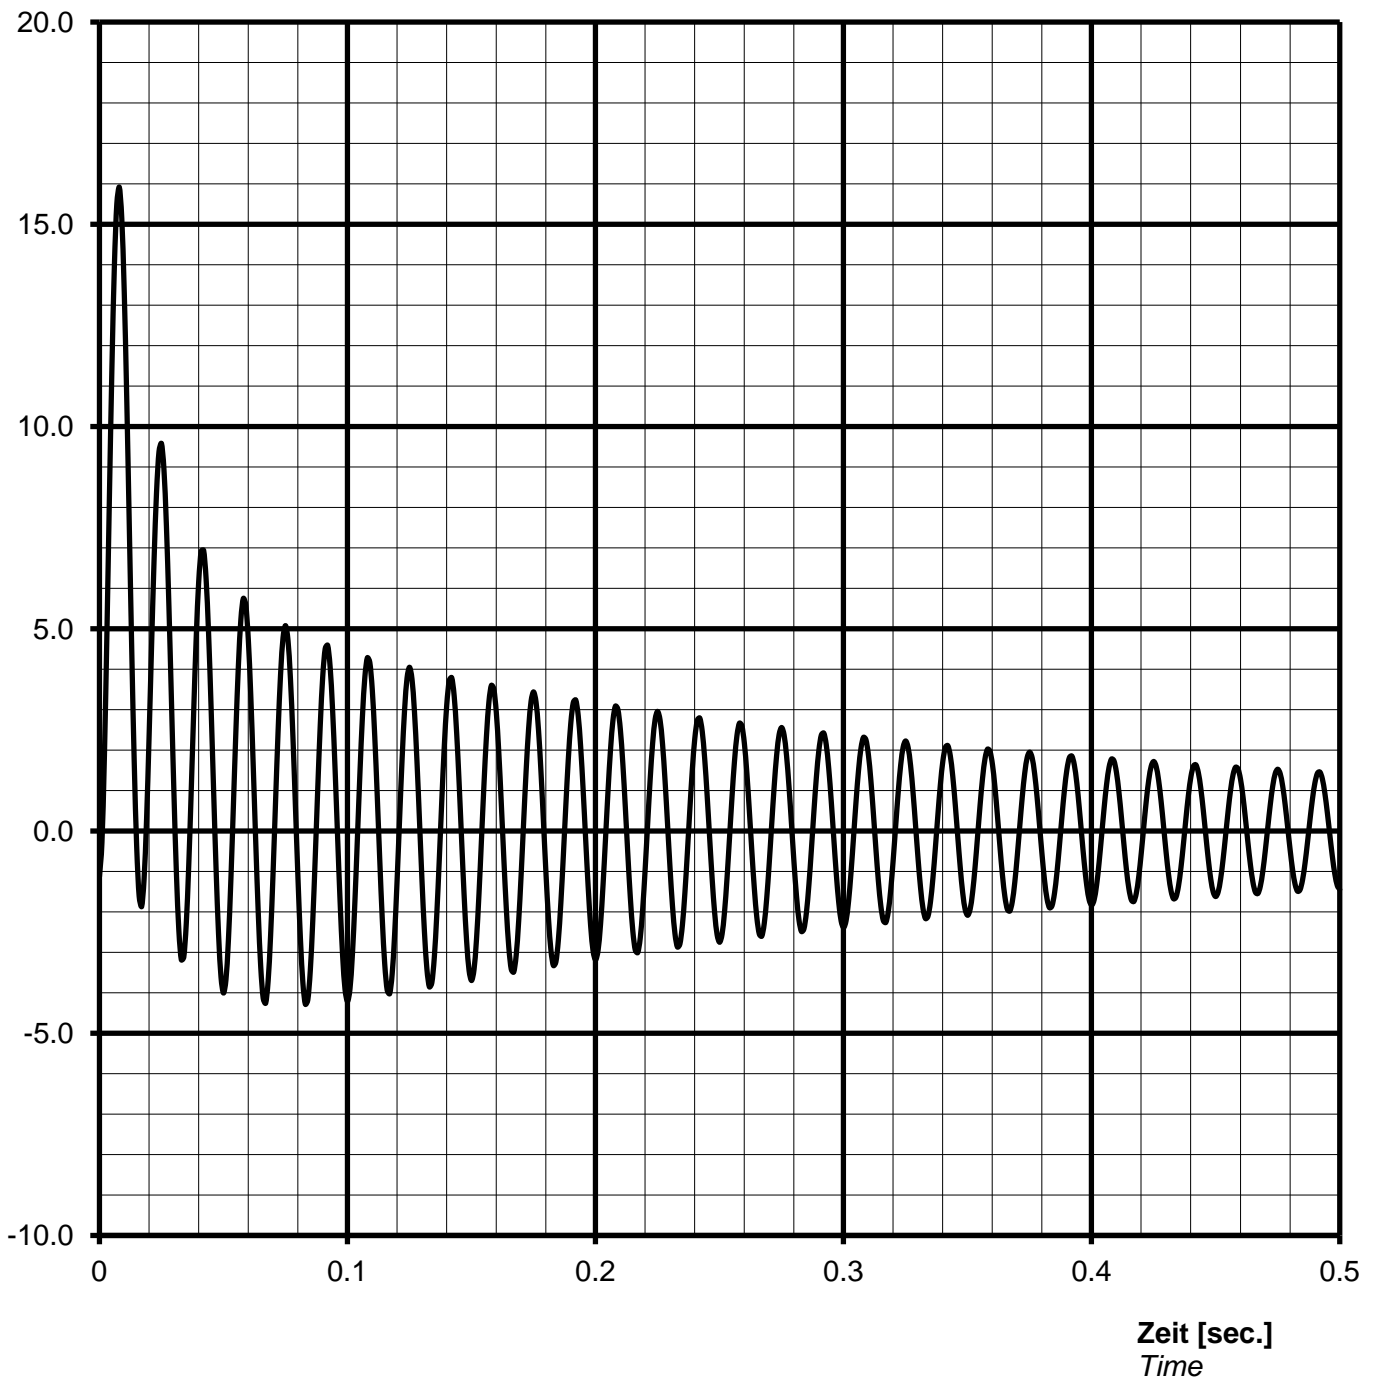

**Notizen / remarks:**

**Maximum asymmetric peak value**  $I_{\text{speak}} =$  **32170 A** or **15.92 p.u.**

#### Nennwerte / nominal data

DSG 74 M1/4

Leistung  $S_N$ : **1680** kVA

$\cos \varphi$ : **0.80**

Rating

p.f.

Spannung  $U_N$ : **0.48** kV

Strom  $I_N$ : **2021** A

Voltage

Current

Frequenz f: **60** Hz

Drehzahl n: **1800** min<sup>-1</sup>


Frequency

Speed

Schutzart **IP23**

Protection

#### Überlast Kennlinie Overload capability

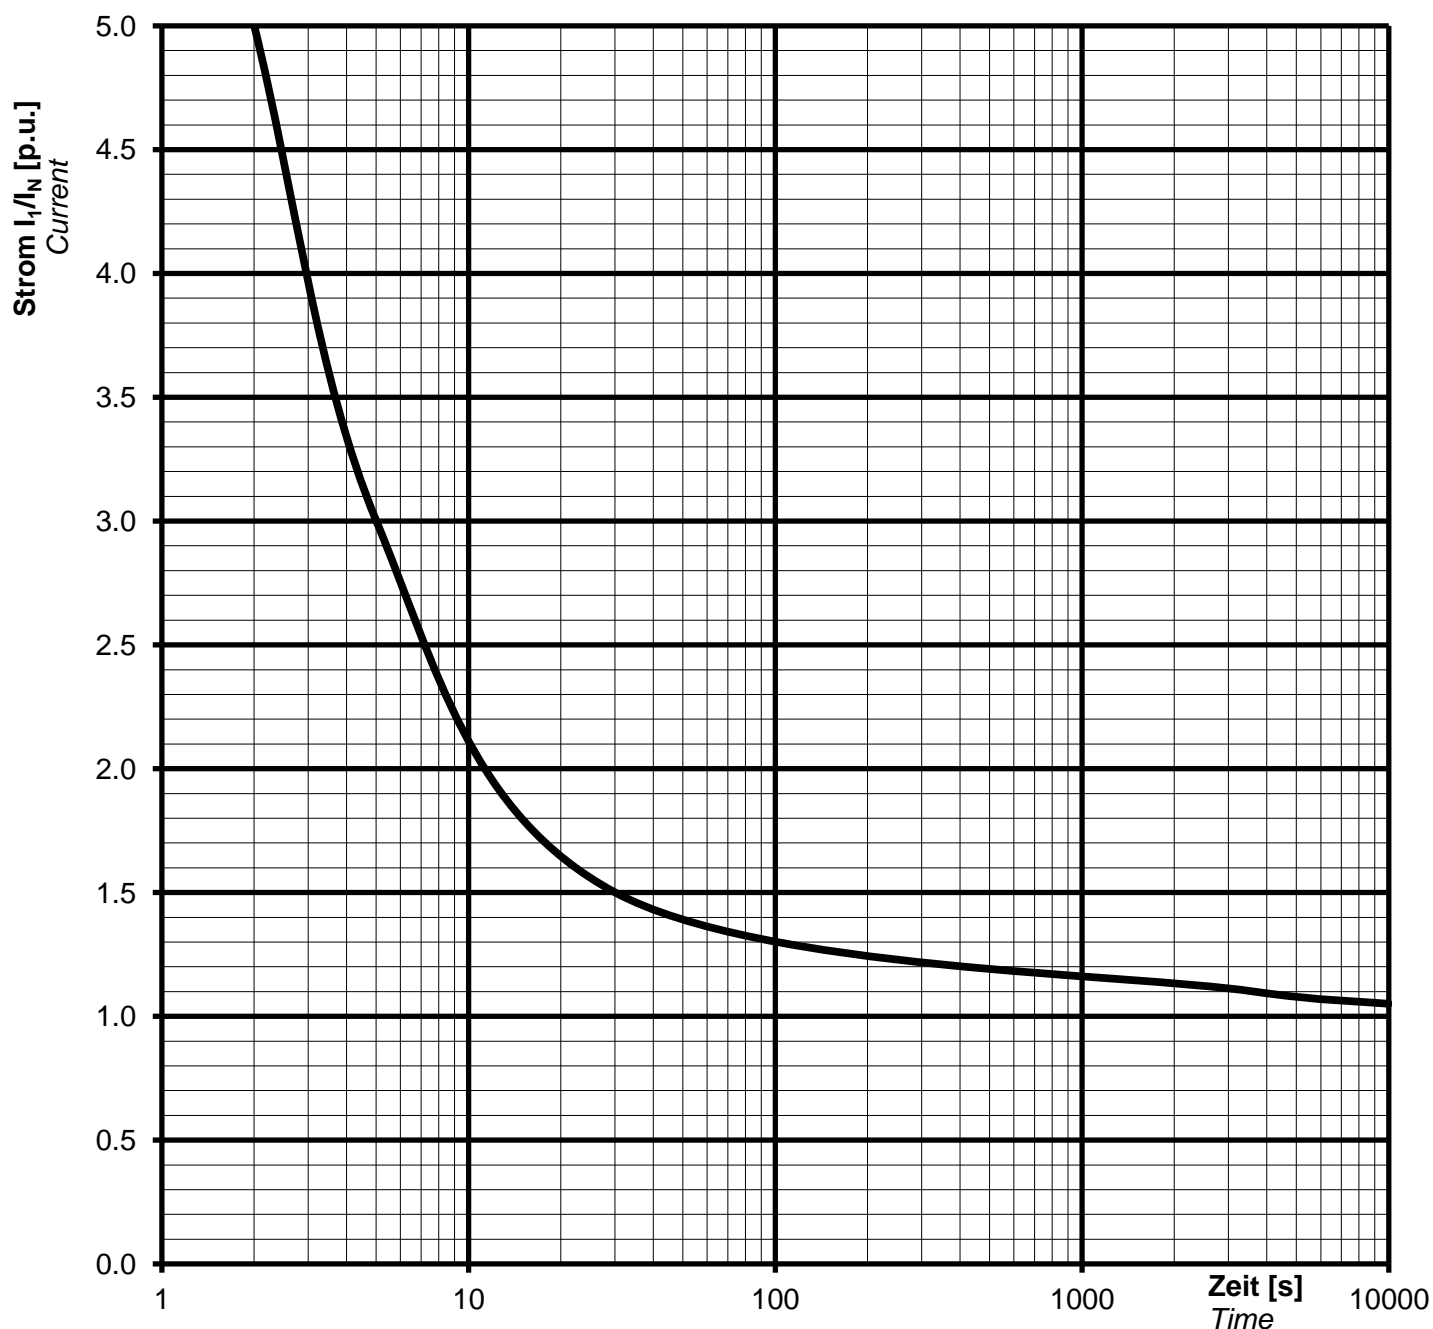

#### Notizen / remarks:

Strom / Zeit Kriterien:

$$(I / I_N)^2 \cdot t = 45s$$

Current/time characteristics:

1,5 \*  $I_N$  for 30 s

1,1 \*  $I_N$  for 1 h in 6h

#### Nenndaten / nominal data

**DSG 74 M1/4**

Rating  $S_N$ : **1680 kVA**

*p.f.* **0.80**

*Bemessungsleistung*

Leistungsfaktor  $\cos \varphi$ :

Nominal voltage  $U_N$ : **0.48 kV**

Nominal current  $I_N$ : **2021 A**

*Bemessungsspannung*

*Bemessungsstrom*

Frequency  $f_N$ : **60 Hz**

Speed  $n$ : **1800 min<sup>-1</sup>**


*Frequenz*

*Drehzahl*

Protection: **IP23**

*Schutzart*

#### Inverse current or unbalanced negative sequence current

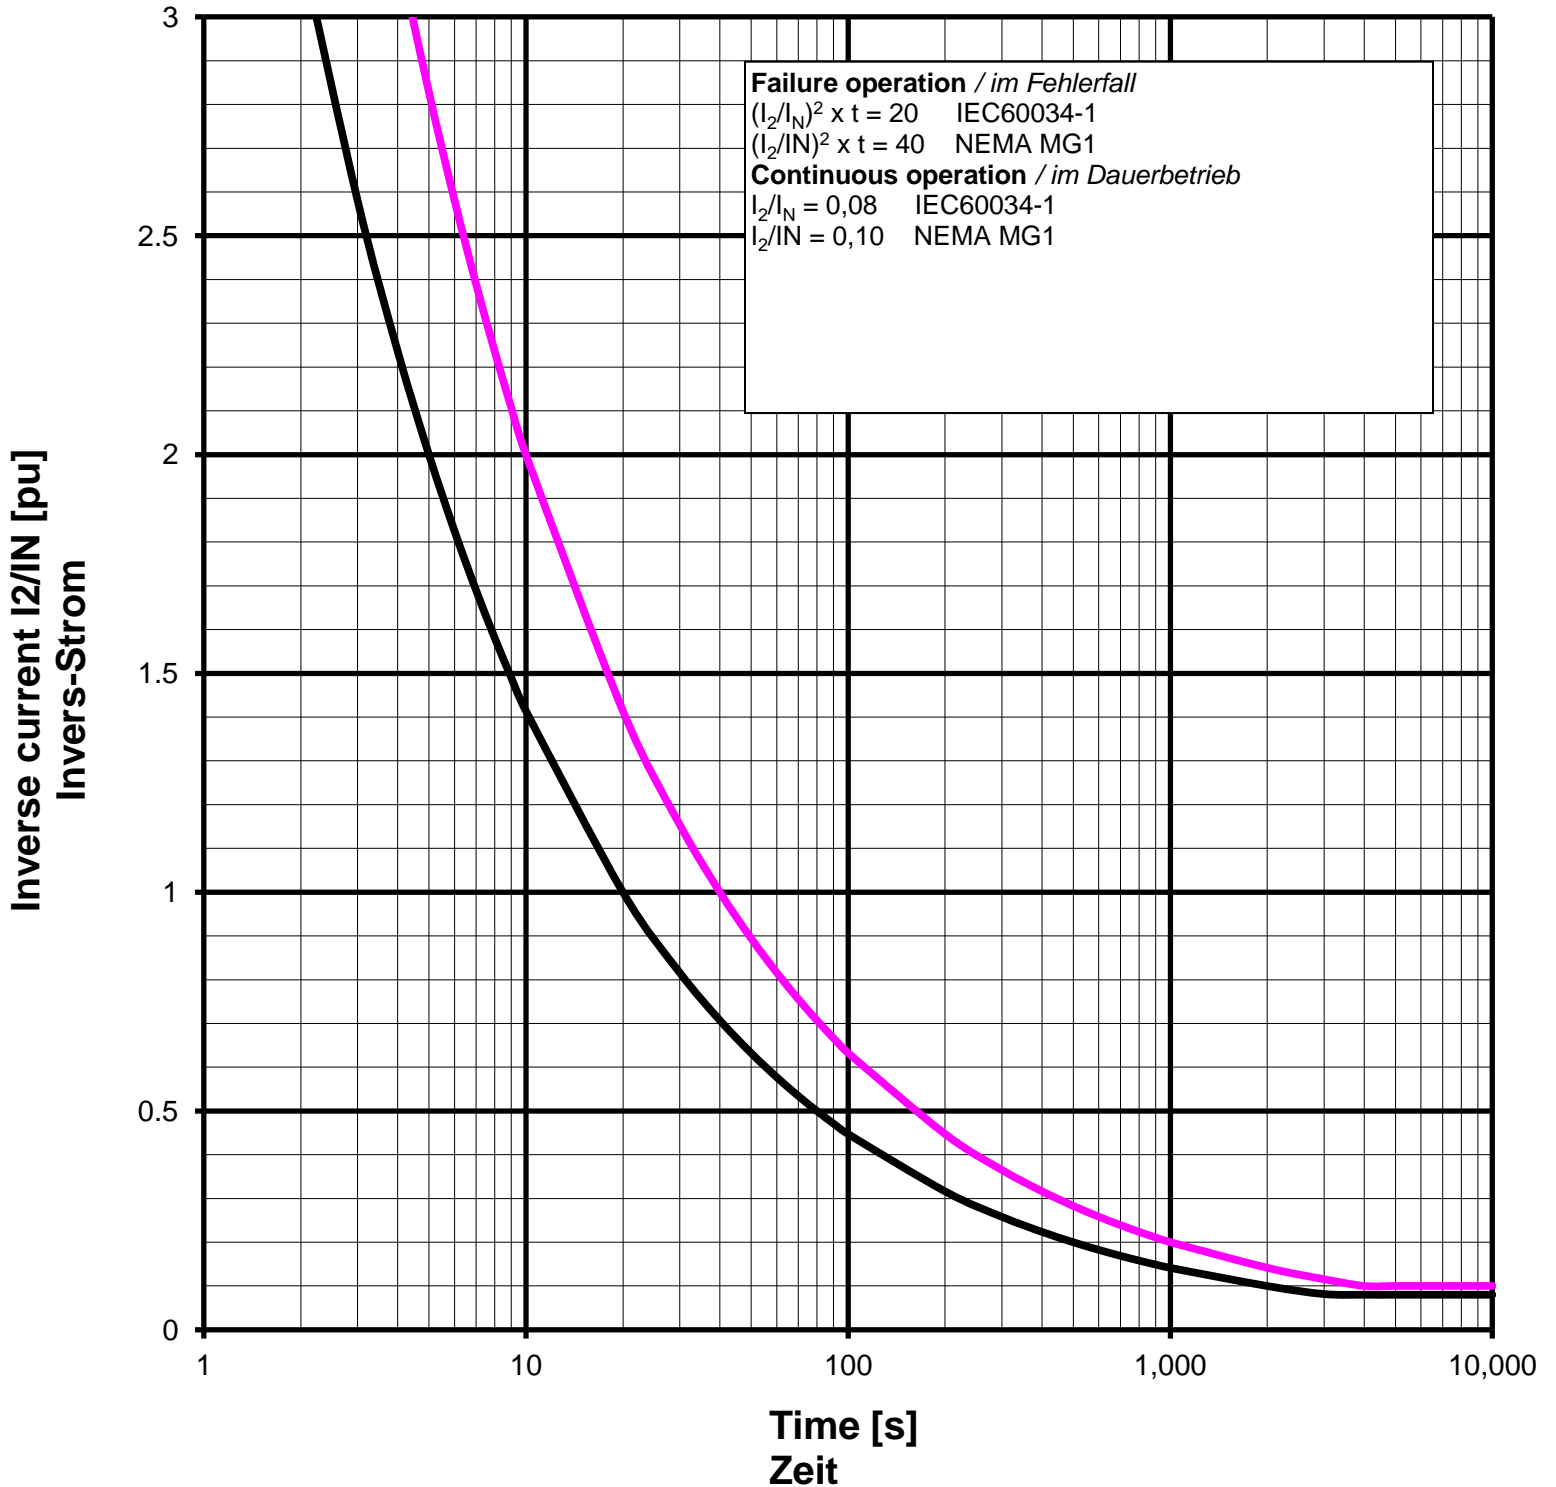

Remarks / Notizen:



Technische Daten selbstregelnden Drehstrom-Synchrongenerator  
technical data for self regulating three phase alternator

ING-FCD-0112


TYPE

DSG 74 M1/4

Projekt:

Order Nr.:

Capability (P-Q) Diagram

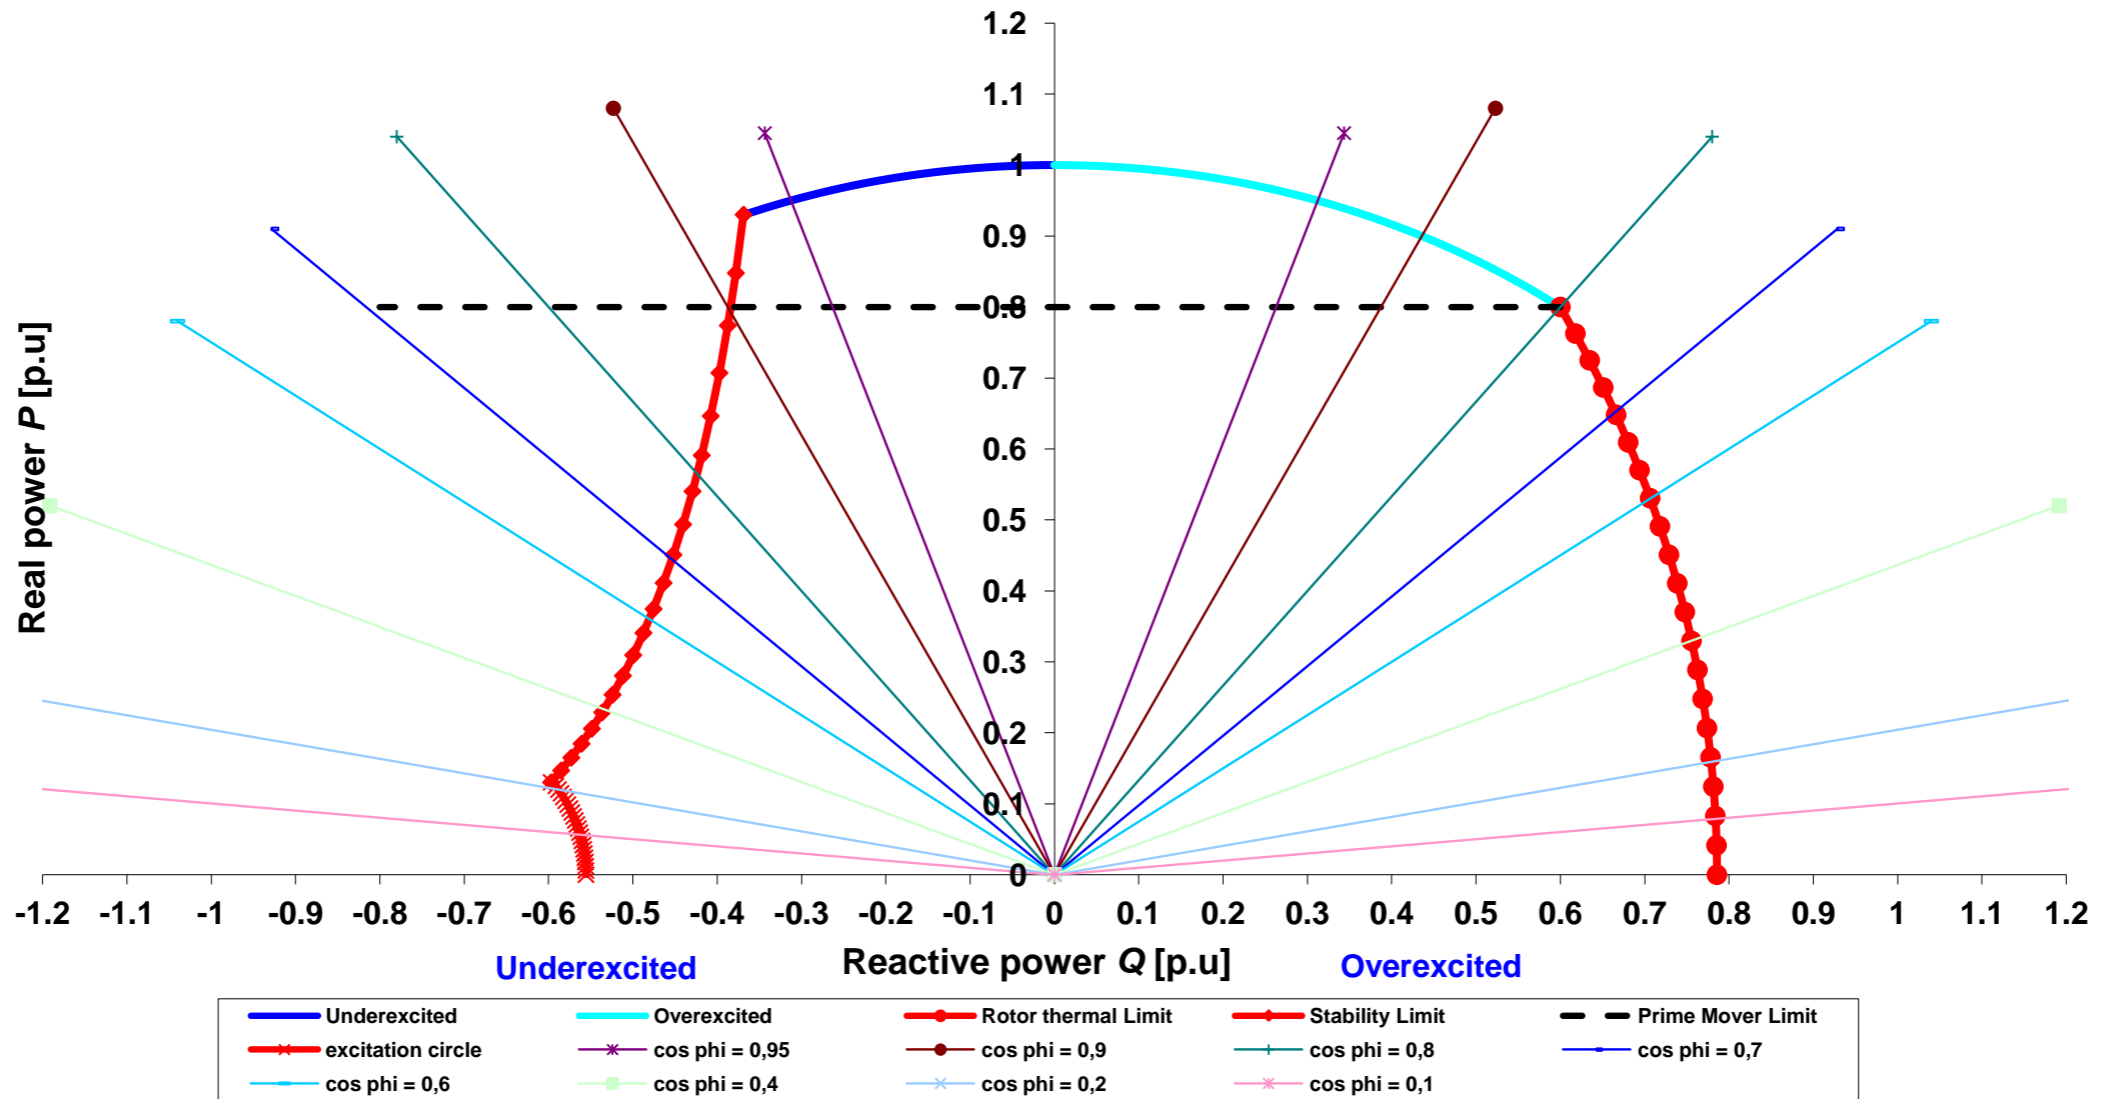


Cummins Generator Technologies

Datum / date:

30/09/2013



TYPE	DSG 74 M1/4	Projekt:		Order Nr.:	
------	-------------	----------	--	------------	--

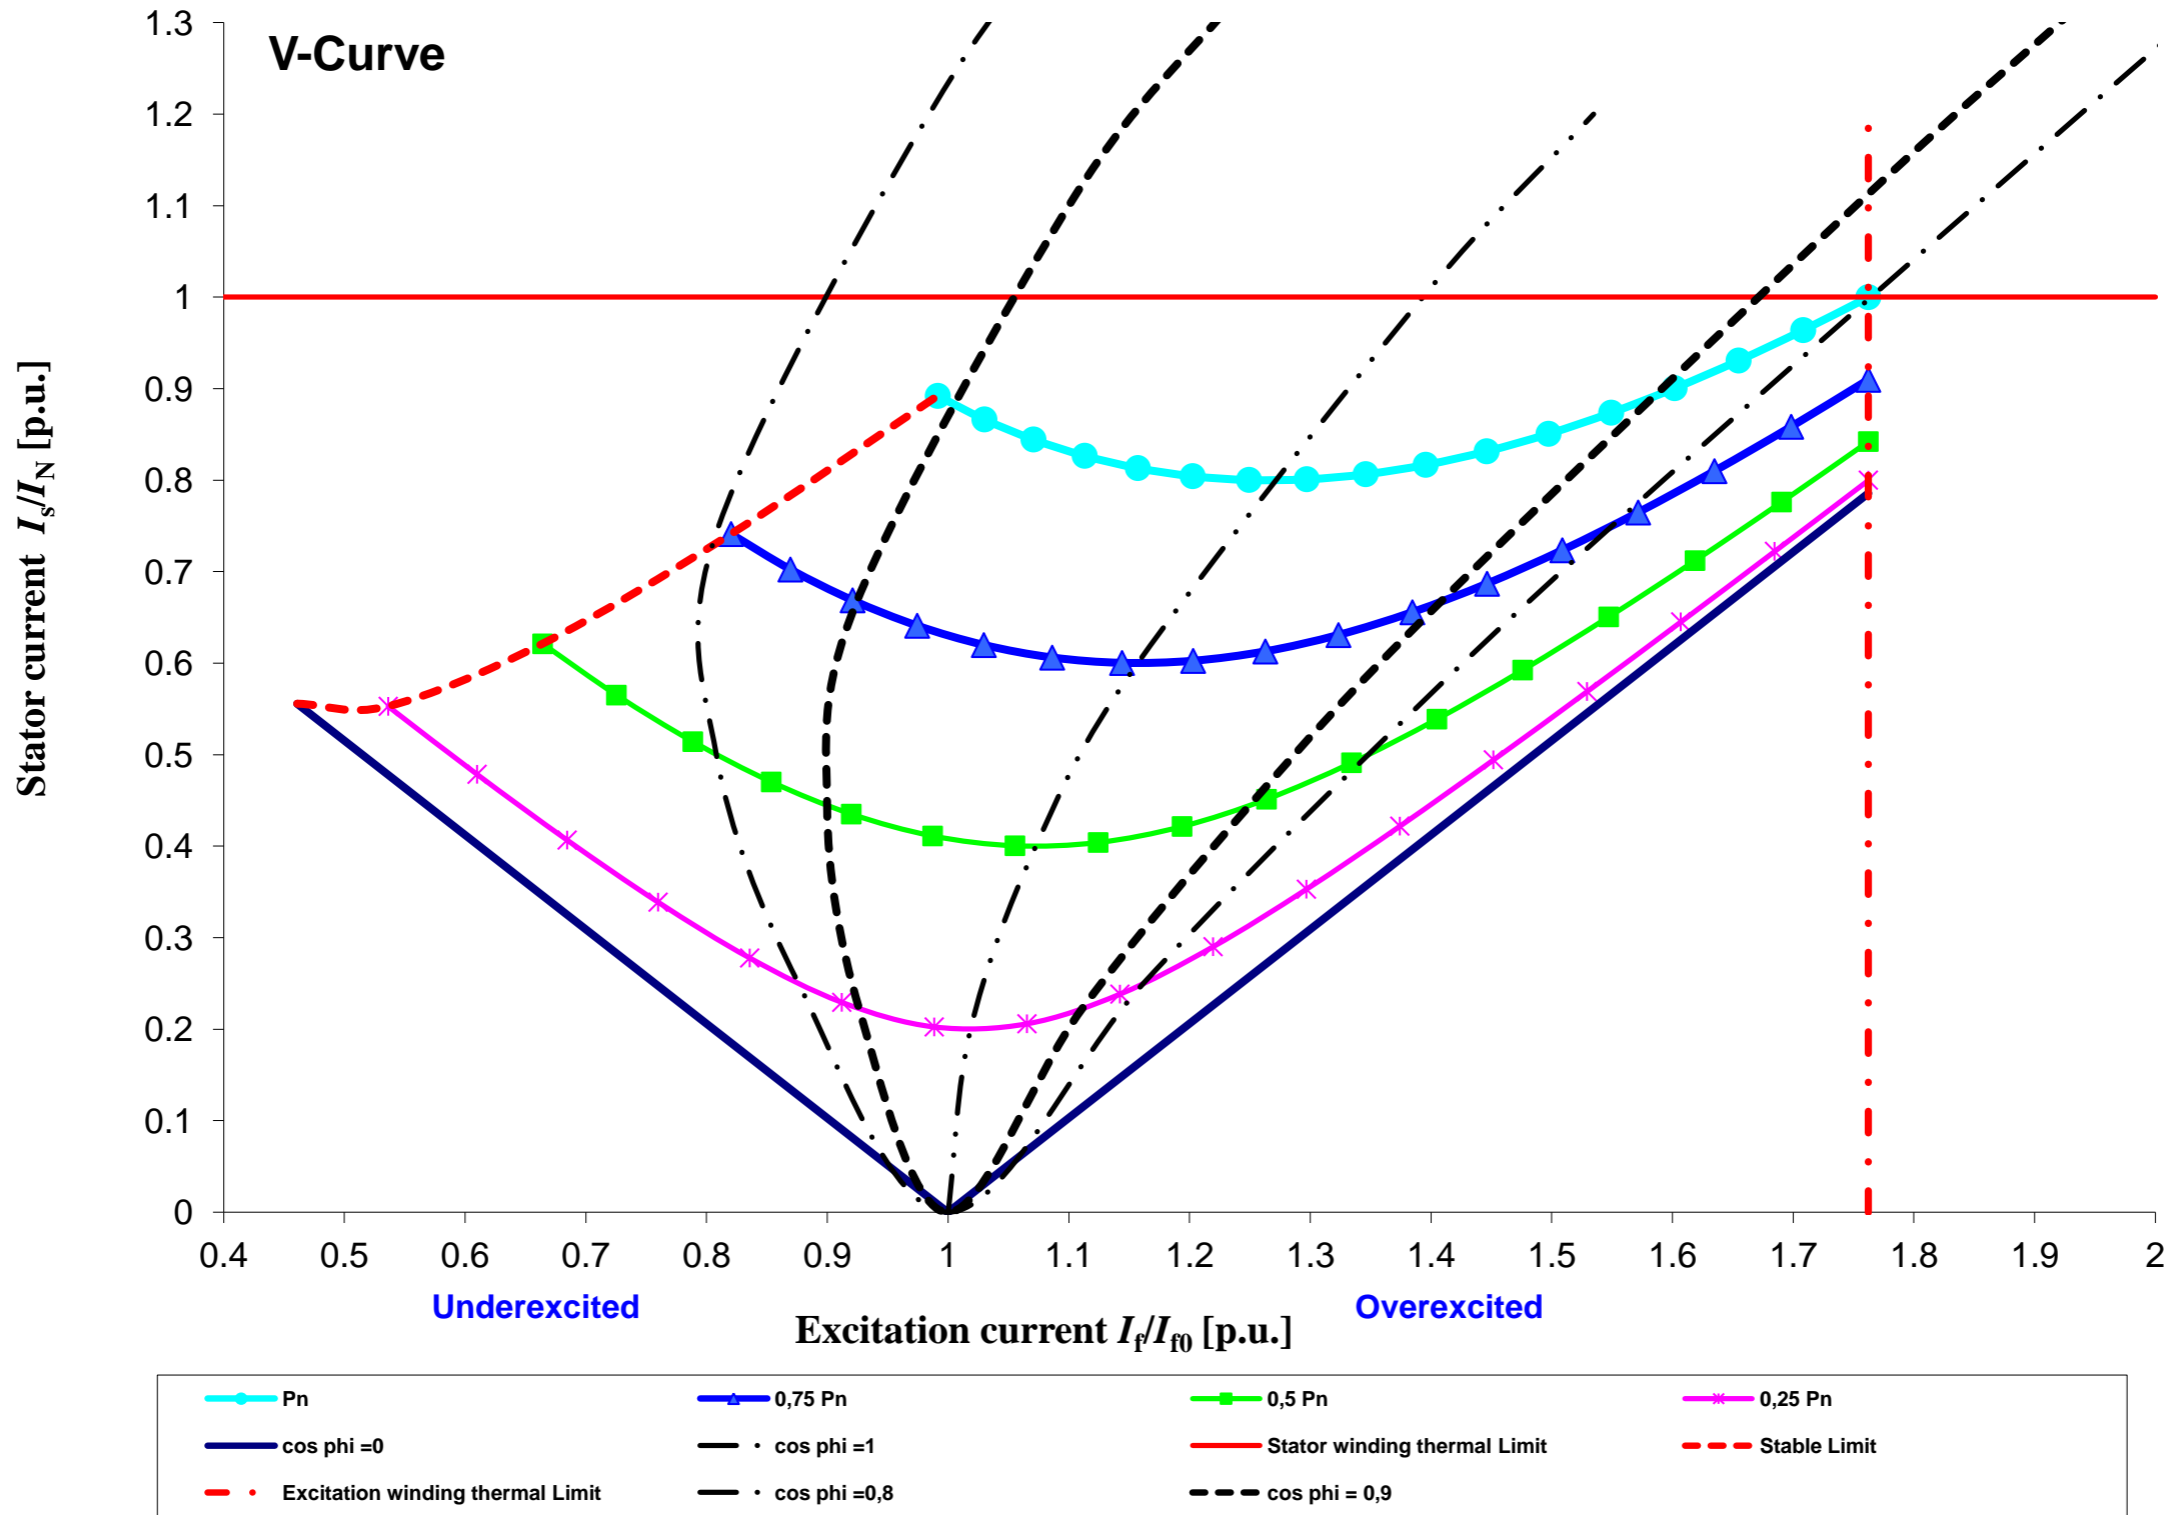

Cummins Generator Technologies	Datum / date:	
	30/09/2013	