

STAMFORD®

S1L2-Y Wdg.311 / 711 (Single Phase) - Technical Data Sheet

Standards

Stamford industrial alternators meet the requirements of IEC EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

| | |
|----------------------------------|----------------------------|
| Excitation System | |
| AVR Type | AVR Power |
| VITA01 | Self-Excited / Aux winding |
| Voltage Regulation | ± 0.5% |
| No Load Excitation Voltage (V) | 14 V |
| Full Load Excitation Voltage (V) | 53 V |

STAMFORD®

S1L2-Y Wdg.311 / 711 (Single Phase)

| Electrical Data | | | | | | | | | | | | |
|-------------------------------------------------------------|----------------------------------------------------------|------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|------|
| Insulation System | Class H | | | | | | | | | | | |
| IP Rating | IP23 | | | | | | | | | | | |
| Stator Winding | Double Layer Concentric | | | | | | | | | | | |
| Winding Pitch | Two Thirds | | | | | | | | | | | |
| Winding Leads | 12 | | | | | | | | | | | |
| Winding Number | 311 | | | | | | | | | | | |
| Number of Poles | 4 | | | | | | | | | | | |
| RFI Suppression | EN 61000-6-2 & EN 61000-6-4, refer to factory for others | | | | | | | | | | | |
| Waveform Distortion | NO LOAD < 2% NON-DISTORTING LINEAR LOAD < 5.0% | | | | | | | | | | | |
| Short Circuit Ratio | 1/Xd | | | | | | | | | | | |
| Steady State X/R Ratio | 5.4428 | | | | | | | | | | | |
| | 50Hz | | | | | | 60Hz | | | | | |
| VOLTAGE DOUBLE DELTA | 220 / 110 | | 230 / 115 | | 240 / 120 | | 220 / 110 | | 230 / 115 | | 240 / 120 | |
| VOLTAGE PARALLEL DELTA | 110 | | 115 | | 120 | | 110 | | 115 | | 120 | |
| POWER FACTOR | 0.8 | 1.0 | 0.8 | 1.0 | 0.8 | 1.0 | 0.8 | 1.0 | 0.8 | 1.0 | 0.8 | 1.0 |
| kVA BASE RATING FOR REACTANCE VALUES | 34.9 | 39.4 | 35.0 | 39.6 | 35.0 | 39.6 | 38.3 | 43.2 | 39.0 | 44.1 | 40.5 | 45.8 |
| Saturated Values in Per Unit at Base Ratings and Voltages | | | | | | | | | | | | |
| Xd Dir. Axis Synchronous | 1.93 | 2.17 | 1.77 | 2.00 | 1.62 | 1.84 | 2.54 | 2.86 | 2.36 | 2.67 | 2.25 | 2.55 |
| X'd Dir. Axis Transient | 0.11 | 0.12 | 0.10 | 0.11 | 0.09 | 0.10 | 0.14 | 0.16 | 0.13 | 0.15 | 0.13 | 0.14 |
| X''d Dir. Axis Subtransient | 0.11 | 0.12 | 0.10 | 0.11 | 0.09 | 0.10 | 0.14 | 0.16 | 0.13 | 0.15 | 0.12 | 0.14 |
| Xq Quad. Axis Reactance | 1.37 | 1.55 | 1.26 | 1.42 | 1.16 | 1.31 | 1.81 | 2.04 | 1.68 | 1.90 | 1.61 | 1.82 |
| X''q Quad. Axis Subtransient | 0.13 | 0.15 | 0.12 | 0.13 | 0.11 | 0.12 | 0.17 | 0.19 | 0.16 | 0.18 | 0.15 | 0.17 |
| XL Leakage Reactance | 0.06 | 0.07 | 0.05 | 0.06 | 0.05 | 0.06 | 0.08 | 0.09 | 0.07 | 0.08 | 0.07 | 0.08 |
| X2 Negative Reactance | 0.23 | 0.26 | 0.21 | 0.24 | 0.19 | 0.22 | 0.30 | 0.34 | 0.28 | 0.32 | 0.27 | 0.31 |
| X0 Zero Sequence | 0.05 | 0.06 | 0.05 | 0.06 | 0.04 | 0.05 | 0.07 | 0.08 | 0.07 | 0.07 | 0.06 | 0.07 |
| Unsaturated Values in Per Unit at Base Ratings and Voltages | | | | | | | | | | | | |
| Xd Dir. Axis Synchronous | 2.31 | 2.61 | 2.12 | 2.40 | 1.95 | 2.20 | 3.04 | 3.43 | 2.84 | 3.21 | 2.70 | 3.06 |
| X'd Dir. Axis Transient | 0.13 | 0.14 | 0.12 | 0.13 | 0.11 | 0.12 | 0.17 | 0.19 | 0.15 | 0.17 | 0.15 | 0.17 |
| X''d Dir. Axis Subtransient | 0.12 | 0.14 | 0.11 | 0.13 | 0.10 | 0.12 | 0.16 | 0.18 | 0.15 | 0.17 | 0.14 | 0.16 |
| Xq Quad. Axis Reactance | 1.41 | 1.60 | 1.30 | 1.47 | 1.19 | 1.35 | 1.86 | 2.10 | 1.73 | 1.96 | 1.65 | 1.87 |
| X''q Quad. Axis Subtransient | 0.15 | 0.17 | 0.14 | 0.16 | 0.13 | 0.15 | 0.20 | 0.23 | 0.19 | 0.21 | 0.18 | 0.20 |
| XL Leakage Reactance | 0.07 | 0.07 | 0.06 | 0.07 | 0.06 | 0.06 | 0.09 | 0.10 | 0.08 | 0.09 | 0.08 | 0.09 |
| X2 Negative Reactance | 0.28 | 0.31 | 0.25 | 0.29 | 0.23 | 0.26 | 0.36 | 0.41 | 0.34 | 0.38 | 0.32 | 0.37 |
| X0 Zero Sequence | 0.06 | 0.07 | 0.06 | 0.06 | 0.05 | 0.06 | 0.08 | 0.09 | 0.08 | 0.09 | 0.07 | 0.08 |
| Time Constants (seconds) | | | | | | | | | | | | |
| T'd TRANSIENT TIME CONST. | 0.028 | | | | | | | | | | | |
| T''d SUB-TRANSTIME CONST. | 0.003 | | | | | | | | | | | |
| T'do O.C. FIELD TIME CONST. | 0.2 | | | | | | | | | | | |
| Ta ARMATURE TIME CONST. | 0.008 | | | | | | | | | | | |

STAMFORD®

S1L2-Y Wdg.311 / 711 (Single Phase)

| Resistances in Ohms (Ω) at 22°C | | |
|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Stator Winding Resistance (Ra) | 0.0561 Ω per phase series star connected | |
| Rotor Winding Resistance (Rf) | 1.279 Ω | |
| Exciter Stator Winding Resistance | 16 Ω | |
| Exciter Rotor Winding Resistance | 0.137 Ω per phase | |
| Positive Sequence Resistance (R1) | 0.070 Ω | |
| Negative Sequence Resistance (R2) | 0.081 Ω | |
| Zero Sequence Resistance (R0) | 0.070 Ω | |
| Aux Winding Resistance (with winding 711 only) | 3.78 Ω | |
| Mechanical data | | |
| Cooling Air | 0.176 m ³ /sec (50Hz) | 0.212 m ³ /sec (60Hz) |
| Shaft and Keys | All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation. | |
| Bearing | 1 Bearing | 2 Bearing |
| Weight Complete Alternator | 241 kg | 263 kg |
| Weight Wound Stator | 109.5 kg | 109.5 kg |
| Weight Wound Rotor | 89.11 kg | 91.14 kg |
| Moment of Inertia | 0.4365 kgm ² | 0.4372 kgm ² |
| Shipping weight in a Crate | 289 kg | 310 kg |
| Packing Crate Size | 1050X570X960 mm | 1050X570X960 mm |
| Maximum Over Speed | 2250 RPM for two minutes | |
| Bearing Drive End | - | BALL. 6309-2RS (ISO) |
| Bearing Non-Drive End | Ball Bearing, 6306-2RS1 | Ball Bearing, 6306-2RS1 |







STAMFORD®

S1L2-Y Wdg.311 / 711 (Single Phase)

Double Delta Efficiency Curves with 0.8PF

50Hz Curves

60Hz Curves

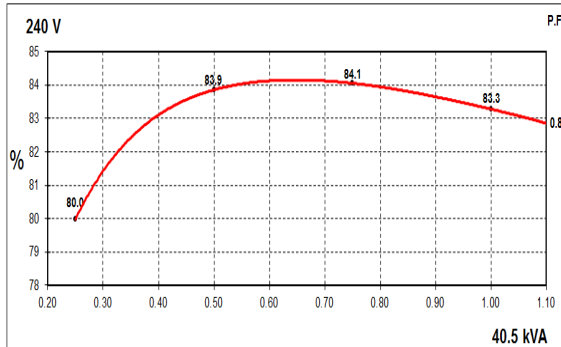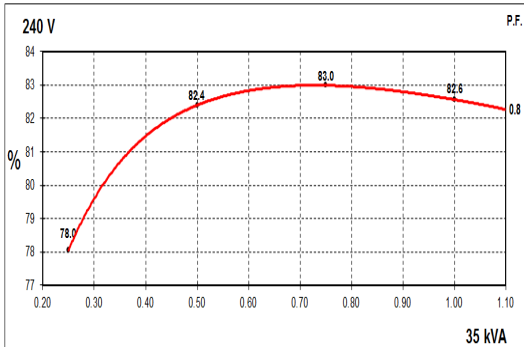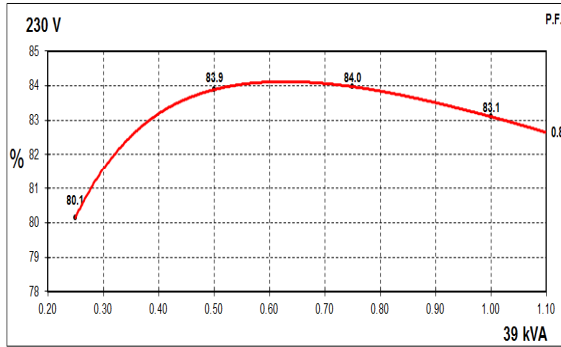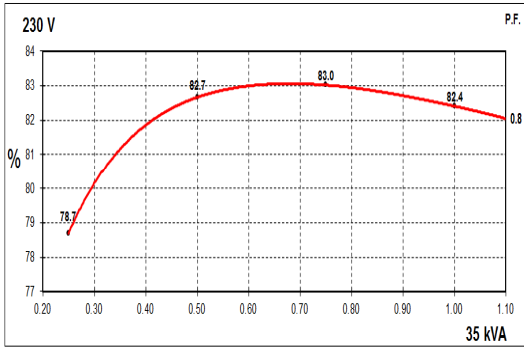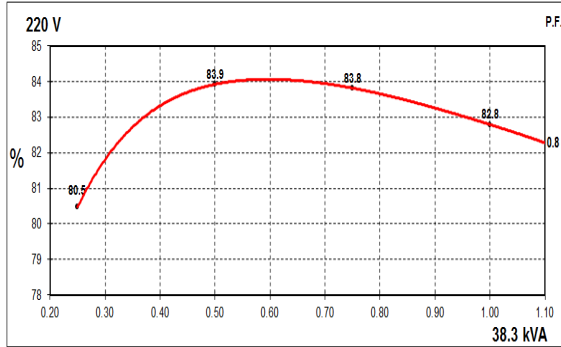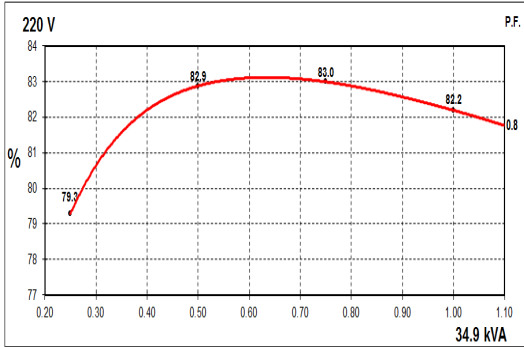







STAMFORD®

S1L2-Y Wdg.311 / 711 (Single Phase)

Double Delta Efficiency Curves with 1.0PF

50Hz Curves

60Hz Curves

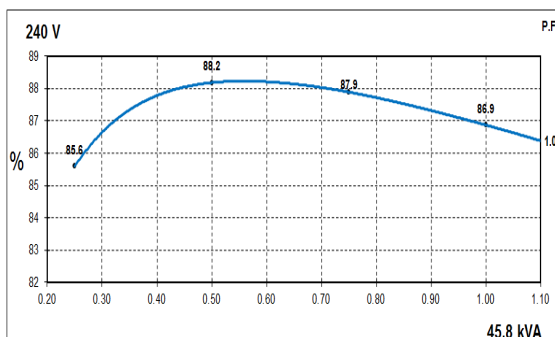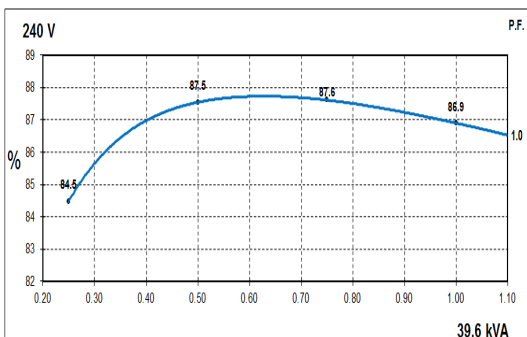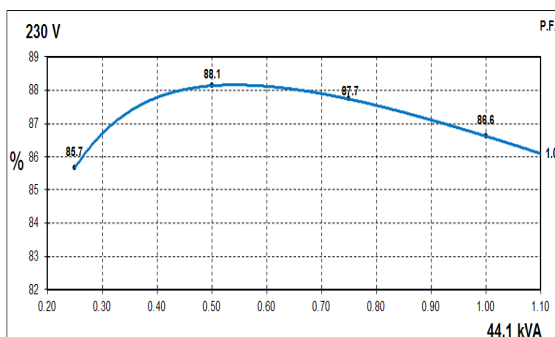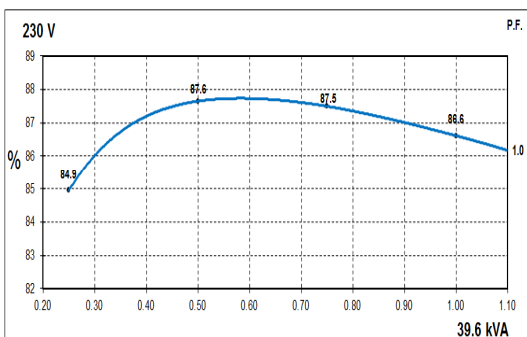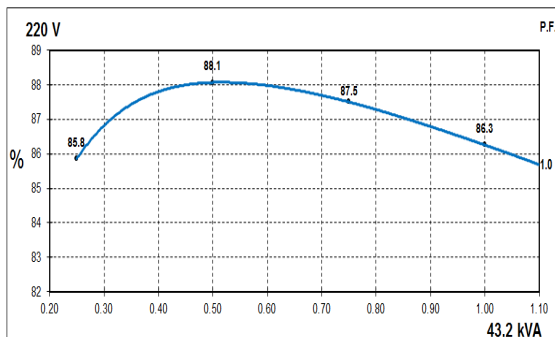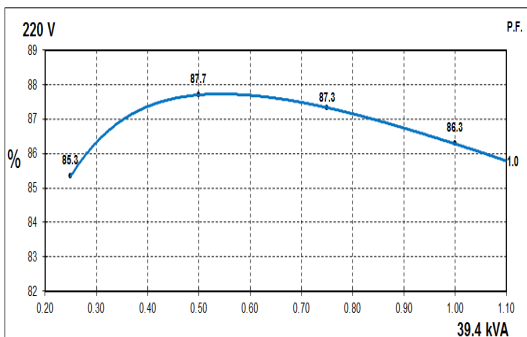


STAMFORD®


S1L2-Y Wdg.311 / 711 (Single Phase)

Locked Rotor Motor Starting Curves

50Hz

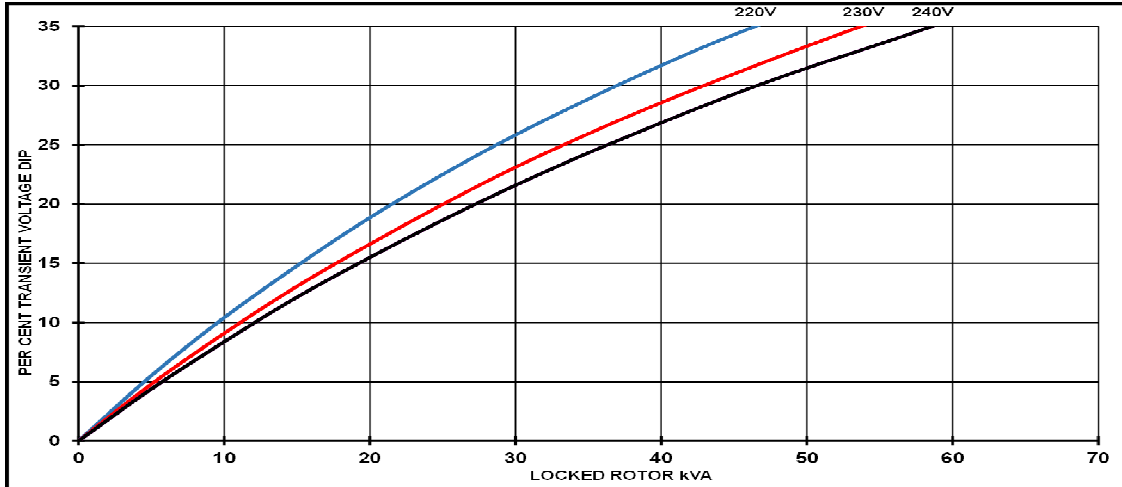

60Hz

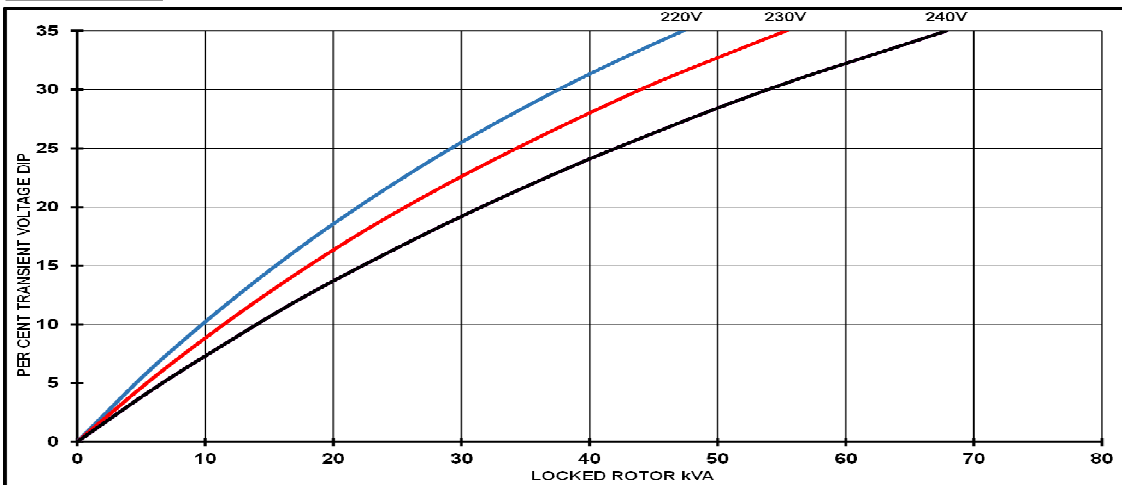


| Transient Voltage Dip Scaling Factor | | Transient Voltage Rise Scaling Factor |
|--------------------------------------|--------|-----------------------------------------------|
| PF | Factor | |
| < 0.5 | 1.00 | For voltage rise multiply voltage dip by 1.25 |
| 0.5 | 0.97 | |
| 0.6 | 0.93 | |
| 0.7 | 0.90 | |
| 0.8 | 0.85 | |
| 0.9 | 0.83 | |
| 1.0 | 0.80 | |

STAMFORD®

S1L2-Y Wdg.311 / 711 (Single Phase) Double Delta Short Circuit Decrement Curve


**Note: Applicable only for Winding 711 (Auxiliary winding).
Winding 311 (no Auxiliary winding) will not provide sustained short circuit capability.**

50Hz

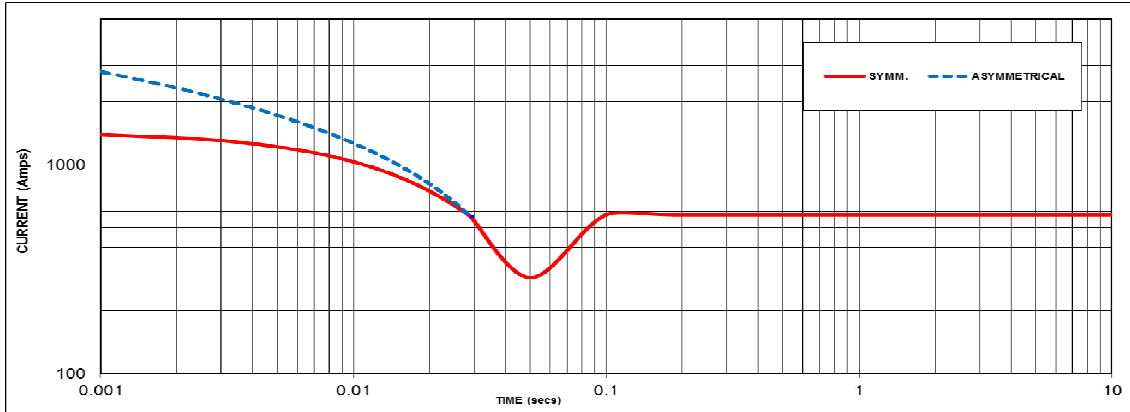

Sustained Short Circuit = 576.4 Amps

60Hz

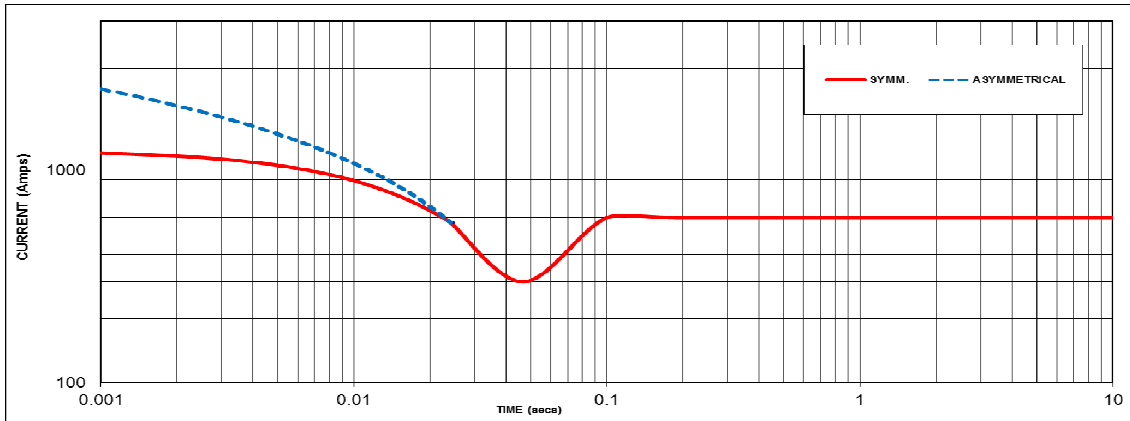

Sustained Short Circuit = 596.2Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

| 50Hz | | 60Hz | |
|---------|--------|---------|--------|
| Voltage | Factor | Voltage | Factor |
| 220V | X 1.00 | 220V | X 1.00 |
| 230V | X 1.05 | 230V | X 1.05 |
| 240V | X 1.09 | 240V | X 1.09 |

The sustained current value is constant irrespective of voltage level

NOTE 2:


This alternator is capable of achieving a balanced 300% sustained short circuit for up to 10 seconds.

STAMFORD


S1L2-Y Wdg.311 / 711 (Single Phase)

Typical Alternator Operating Charts

230V/50Hz

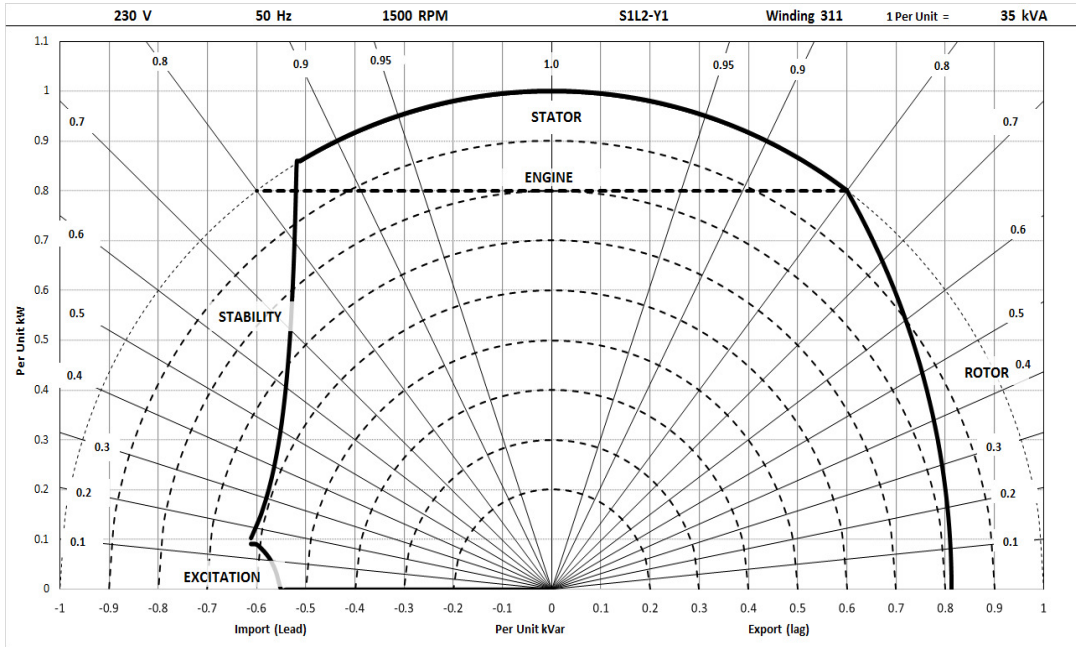

240V/60Hz

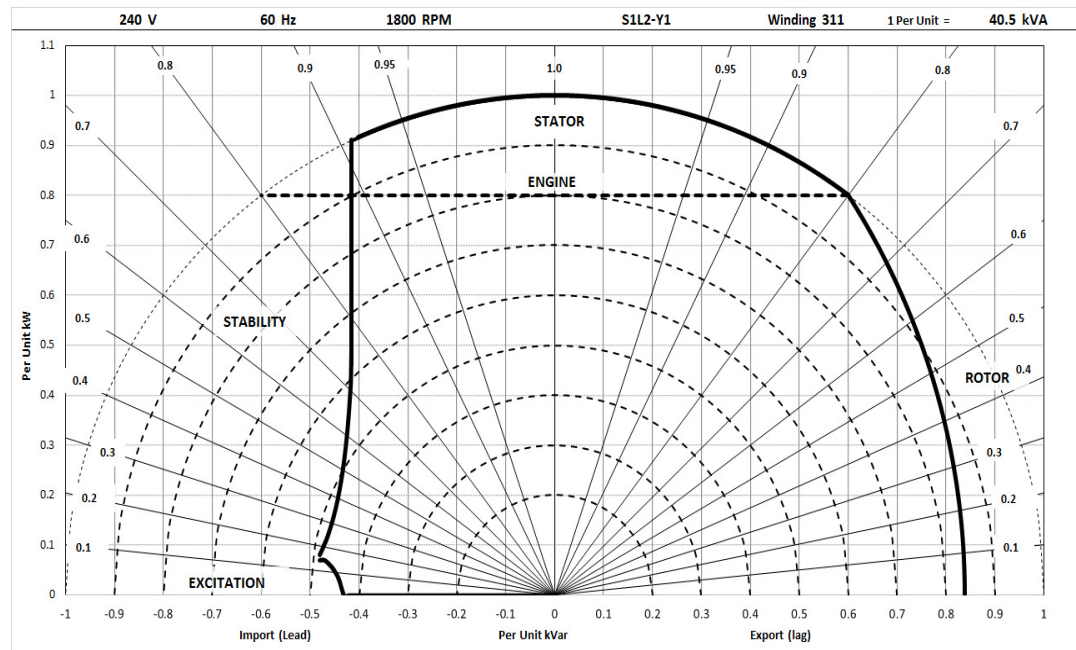

STAMFORD®

S1L2-Y Wdg.311 / 711 (Single Phase)

RATINGS

50Hz

| Class - Temp Rise | Cont. F - 105/40°C 0.8pf | | | Cont. H - 125/40°C 0.8pf | | | Standby - 150/40°C 0.8pf | | | Standby - 163/27°C 0.8pf | | |
|--------------------|------------------------------------|------|------|------------------------------------|------|------|------------------------------------|------|------|------------------------------------|------|------|
| | Double Delta (V) | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 |
| Parallel Delta (V) | 110 | 115 | 120 | 110 | 115 | 120 | 110 | 115 | 120 | 110 | 115 | 120 |
| kVA | 31.8 | 31.9 | 31.9 | 34.9 | 35.0 | 35.0 | 37.7 | 37.8 | 37.8 | 38.4 | 38.5 | 38.5 |
| kW | 25.4 | 25.5 | 25.5 | 27.9 | 28.0 | 28.0 | 30.2 | 30.2 | 30.2 | 30.7 | 30.8 | 30.8 |
| Efficiency (%) | 82.5 | 82.7 | 82.8 | 82.2 | 82.4 | 82.6 | 81.9 | 82.1 | 82.3 | 81.8 | 82.1 | 82.3 |
| kW Input | 30.8 | 30.9 | 30.8 | 34.0 | 34.0 | 33.9 | 36.8 | 36.8 | 36.7 | 37.6 | 37.5 | 37.4 |

| Class - Temp Rise | Cont. F - 105/40°C 1.0pf | | | Cont. H - 125/40°C 1.0pf | | | Standby - 150/40°C 1.0pf | | | Standby - 163/27°C 1.0pf | | |
|--------------------|------------------------------------|------|------|------------------------------------|------|------|------------------------------------|------|------|------------------------------------|------|------|
| | Double Delta (V) | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 |
| Parallel Delta (V) | 110 | 115 | 120 | 110 | 115 | 120 | 110 | 115 | 120 | 110 | 115 | 120 |
| kVA | 35.9 | 36.0 | 36.0 | 39.4 | 39.6 | 39.6 | 42.6 | 42.7 | 42.7 | 43.4 | 43.5 | 43.5 |
| kW | 35.9 | 36.0 | 36.0 | 39.4 | 39.6 | 39.6 | 42.6 | 42.7 | 42.7 | 43.4 | 43.5 | 43.5 |
| Efficiency (%) | 86.7 | 87.0 | 87.2 | 86.3 | 86.6 | 86.9 | 85.9 | 86.3 | 86.6 | 85.8 | 86.2 | 86.5 |
| kW Input | 41.4 | 41.4 | 41.3 | 45.7 | 45.7 | 45.6 | 49.6 | 49.5 | 49.3 | 50.6 | 50.5 | 50.3 |

60Hz

| Class - Temp Rise | Cont. F - 105/40°C 0.8pf | | | Cont. H - 125/40°C 0.8pf | | | Standby - 150/40°C 0.8pf | | | Standby - 163/27°C 0.8pf | | |
|--------------------|------------------------------------|------|------|------------------------------------|------|------|------------------------------------|------|------|------------------------------------|------|------|
| | Double Delta (V) | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 |
| Parallel Delta (V) | 110 | 115 | 120 | 110 | 115 | 120 | 110 | 115 | 120 | 110 | 115 | 120 |
| kVA | 35.2 | 35.9 | 37.3 | 38.3 | 39.0 | 40.5 | 41.3 | 42.1 | 43.7 | 42.1 | 42.9 | 44.6 |
| kW | 28.2 | 28.7 | 29.8 | 30.6 | 31.2 | 32.4 | 33.0 | 33.7 | 35.0 | 33.7 | 34.3 | 35.7 |
| Efficiency (%) | 83.2 | 83.4 | 83.6 | 82.8 | 83.1 | 83.3 | 82.4 | 82.8 | 83.0 | 82.3 | 82.7 | 82.9 |
| kW Input | 33.9 | 34.4 | 35.7 | 37.0 | 37.5 | 38.9 | 40.1 | 40.7 | 42.1 | 40.9 | 41.5 | 43.1 |

| Class - Temp Rise | Cont. F - 105/40°C 1.0pf | | | Cont. H - 125/40°C 1.0pf | | | Standby - 150/40°C 1.0pf | | | Standby - 163/27°C 1.0pf | | |
|--------------------|------------------------------------|------|------|------------------------------------|------|------|------------------------------------|------|------|------------------------------------|------|------|
| | Double Delta (V) | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 |
| Parallel Delta (V) | 110 | 115 | 120 | 110 | 115 | 120 | 110 | 115 | 120 | 110 | 115 | 120 |
| kVA | 39.8 | 40.5 | 42.1 | 43.2 | 44.1 | 45.8 | 46.7 | 47.6 | 49.4 | 47.5 | 48.5 | 50.3 |
| kW | 39.8 | 40.5 | 42.1 | 43.2 | 44.1 | 45.8 | 46.7 | 47.6 | 49.4 | 47.5 | 48.5 | 50.3 |
| Efficiency (%) | 86.7 | 87.0 | 87.2 | 86.3 | 86.6 | 86.9 | 85.8 | 86.2 | 86.5 | 85.7 | 86.1 | 86.4 |
| kW Input | 45.9 | 46.5 | 48.3 | 50.1 | 50.9 | 52.7 | 54.4 | 55.2 | 57.1 | 55.4 | 56.3 | 58.2 |

STAMFORD®

S1L2-Y Wdg.311 / 711 (Single Phase)

De-Rates

All values tabulated above are subject to the following reductions:

- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

news.stamford-avk.com

For Applications Support:
applications@cummins.com

For Customer Service:
service-engineers@stamford-avk.com

For General Enquiries:
info@cumminsgeneratortechnologies.com

Copyright 2025. Cummins Generator Technologies Ltd. All rights reserved.
Cummins and the Cummins logo are registered trade marks of Cummins Inc.
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

