

D52-4635 ISSUE D


IF IN DOUBT-ASK  
DO NOT SCALE

CORE	C OF G
C	555
D	575
E	595

A.V.R. STANDARD REMOVABLE SIDE COVERS  
POSITION 1337 WITH P.M. (SER.3)  
1266 WITHOUT P.M. (SER.4)

A.V.R. ALTERNATIVE POSITION

INDICATES POSITION OF A.V.R.

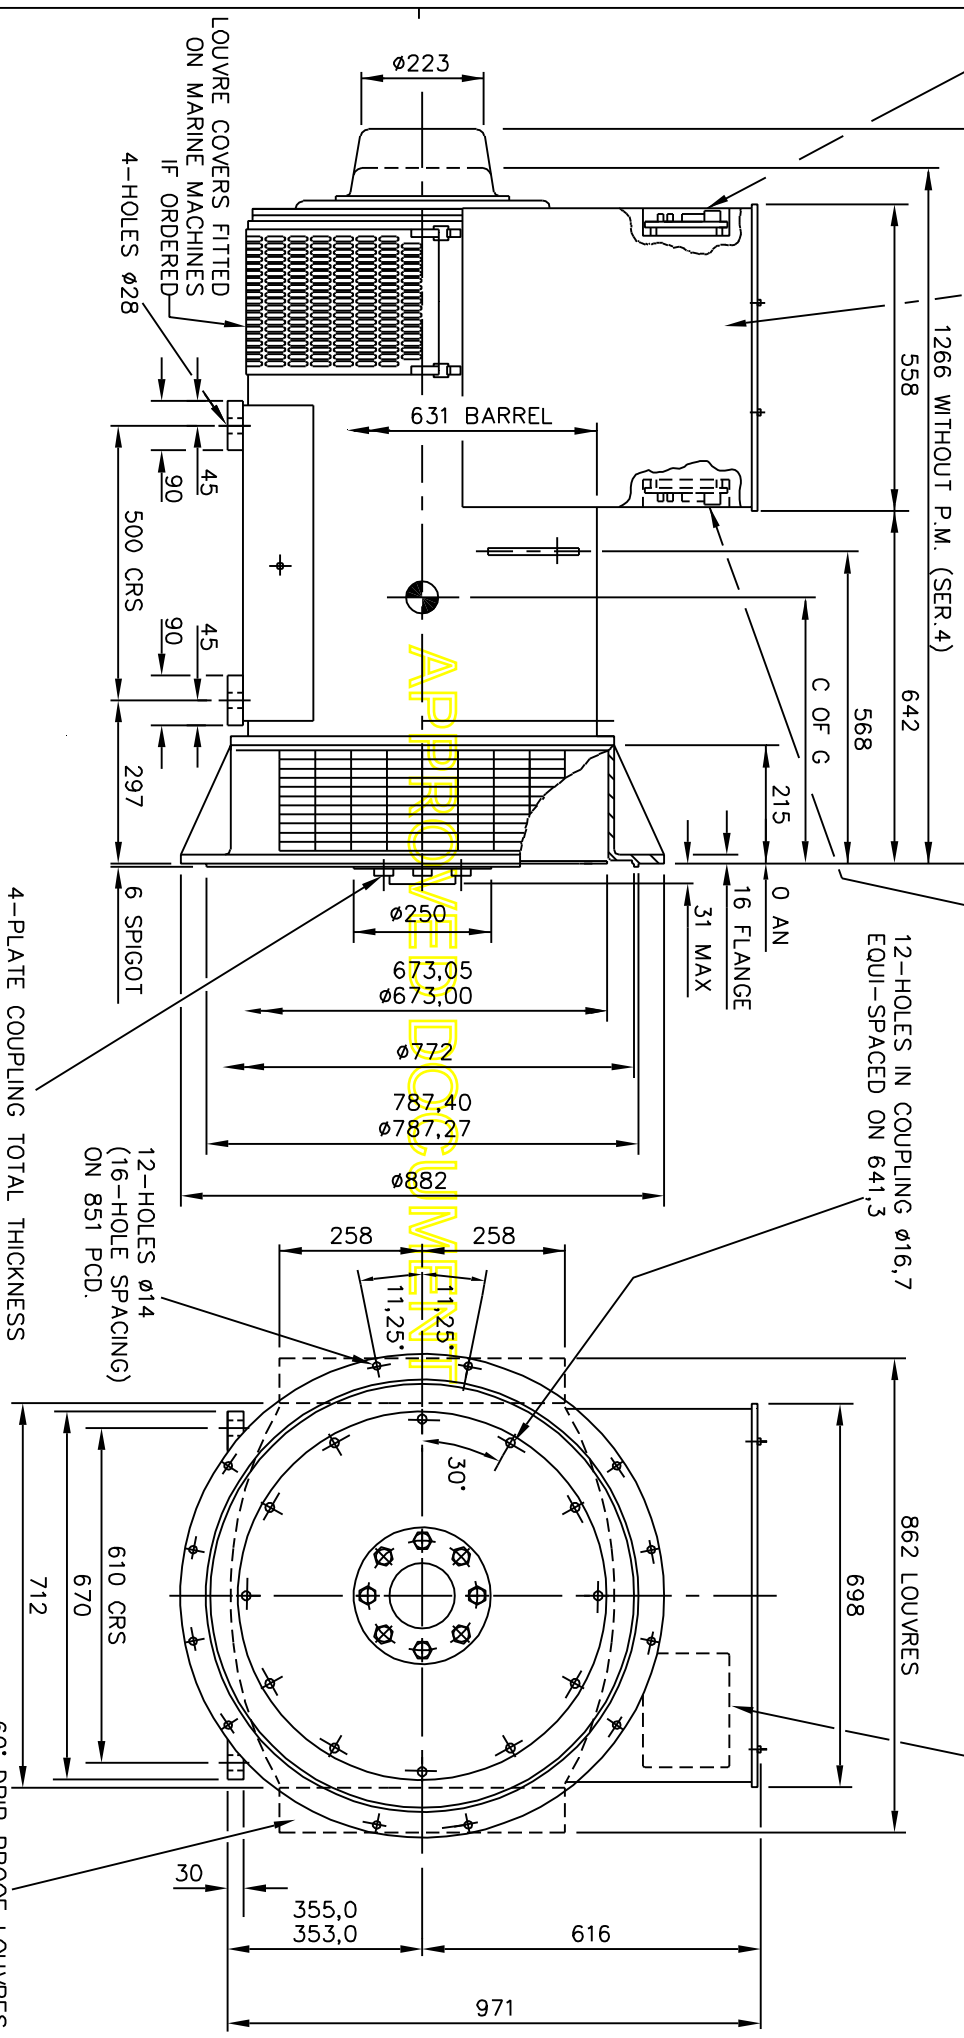

NOTE:-  
CUSTOMER MAY CUT CABLE ENTRY HOLES AS REQUIRED IN ANY OF THE FOUR TERMINAL BOX SIDES SUBJECT TO POSITION OF AVR, TERMINALS, ETC.

4-PLATE COUPLING TOTAL THICKNESS  
4.8. HUB SECURING BOLTS TO BE  
TIGHTENED TO A TORQUE OF  
48kgf m 479N m.

60° DRIP PROOF LOUVRES  
FITTED AS STANDARD ON  
MARINE MACHINES.  
OTHERS IF ORDERED.

REV	DATE	ISSUE	DESCRIPTION
4-8664-02	15.09.06	USD	CHANGE OF COMPANY NAME
4-7503-08	22.11.05	USD	FOOT DETAIL UPDATED
4/7324/08	24.06.2004	GTK	C/H TOL +0 -2 WAS +0 -0.5
4/2776/9	27.07.00	S.M.C.	ORIGINAL ISSUE
MOD'N		ISSUE	DRAWN
		DATE	ALTERATION

CERTIFIED PRINT	DATE
(ONLY IF SIGNED)	S.M.C. 27.07.00
BY	CH D
DATE	APP'D

HC5-1CDE ALTERNATOR ADAPTOR - SAE00 COUPLING - SAE21 STANDARD T/BOX	CUMMINS GENERATOR TECHNOLOGIES LTD. STAMFORD ENGLAND	SCALE 1:10	UNIT OF MEASUREMENT MILLIMETRES (mm)
		D52-4635	ISSUE D