

NOTES: -

SHAFT STIFFNESS: -

THE STIFFNESS OF THE SHAFT BETWEEN THE MAIN ROTOR CORE ϕ AND THE SHAFT FACE 'A' IS 2.1776×10^6 kgcm/radian (STIFFENING EFFECT OF MAIN ROTOR CORE IS NOT INCLUDED IN THIS FIGURE)


SHAFT MATERIAL: -

STEEL - C40E TO BSEN 10083-2 2006 (APPROVED BY MARINE AUTHORITIES WHEN APPROPRIATE) MAXIMUM RECOMMENDED VIBRATORY STRESS LEVEL IN THE SHAFT IS 34.47×10^6 N/m² FOR SPEED RANGE OF 0.95 TO 1.1 X NOMINAL SPEED AND 68.94×10^6 N/m² FOR RUN THROUGH CONDITIONS, FOR INDUSTRIAL MACHINES.


FOR MARINE AUTHORITIES, THEIR APPROPRIATE RULES WILL APPLY.

CUMMINS GENERATOR TECHNOLOGIES LTD SHOULD BE NOTIFIED OF ANY ROTORS NOT COMPLYING WITH THESE RULES. CUMMINS GENERATOR TECHNOLOGIES LTD BALANCE ROTORS TO COMPLY WITH INTERNATIONAL STD BS ISO 1940 PARTS 1 AND 2 . BALANCE GRADE 2.5

FOR UNBALANCED MAGNETIC PULL (U.M.P.) REFER BACK TO THE FACTORY.

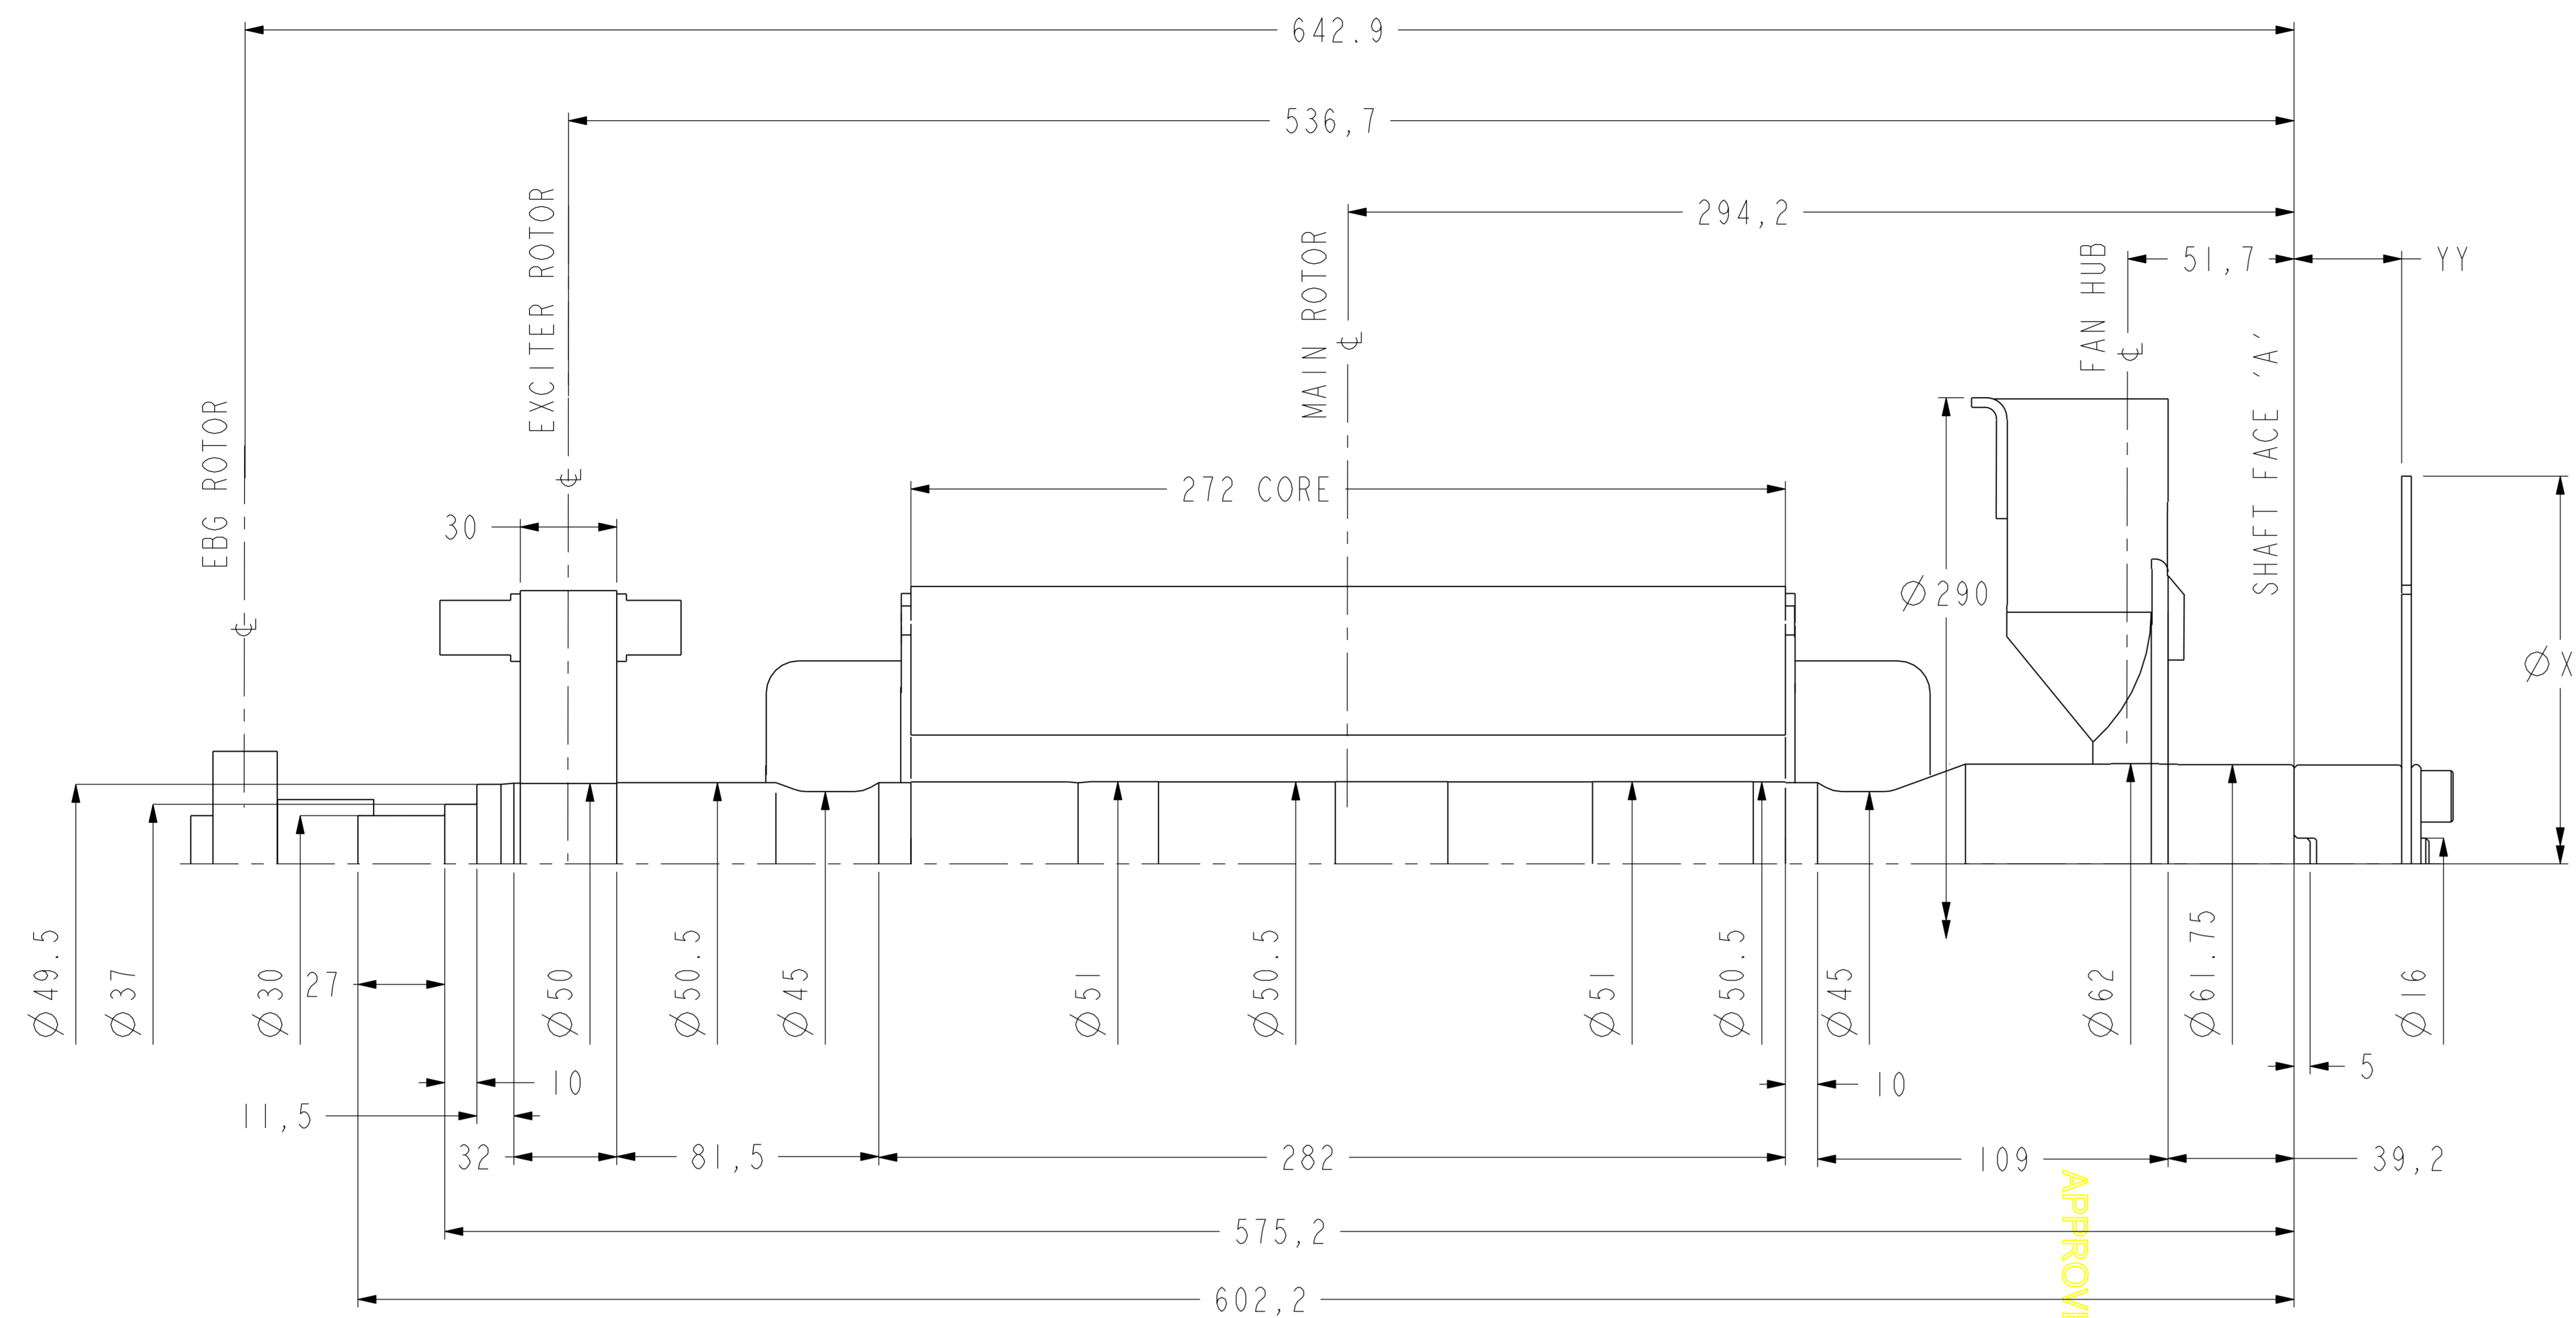

APPROVED DOCUMENT

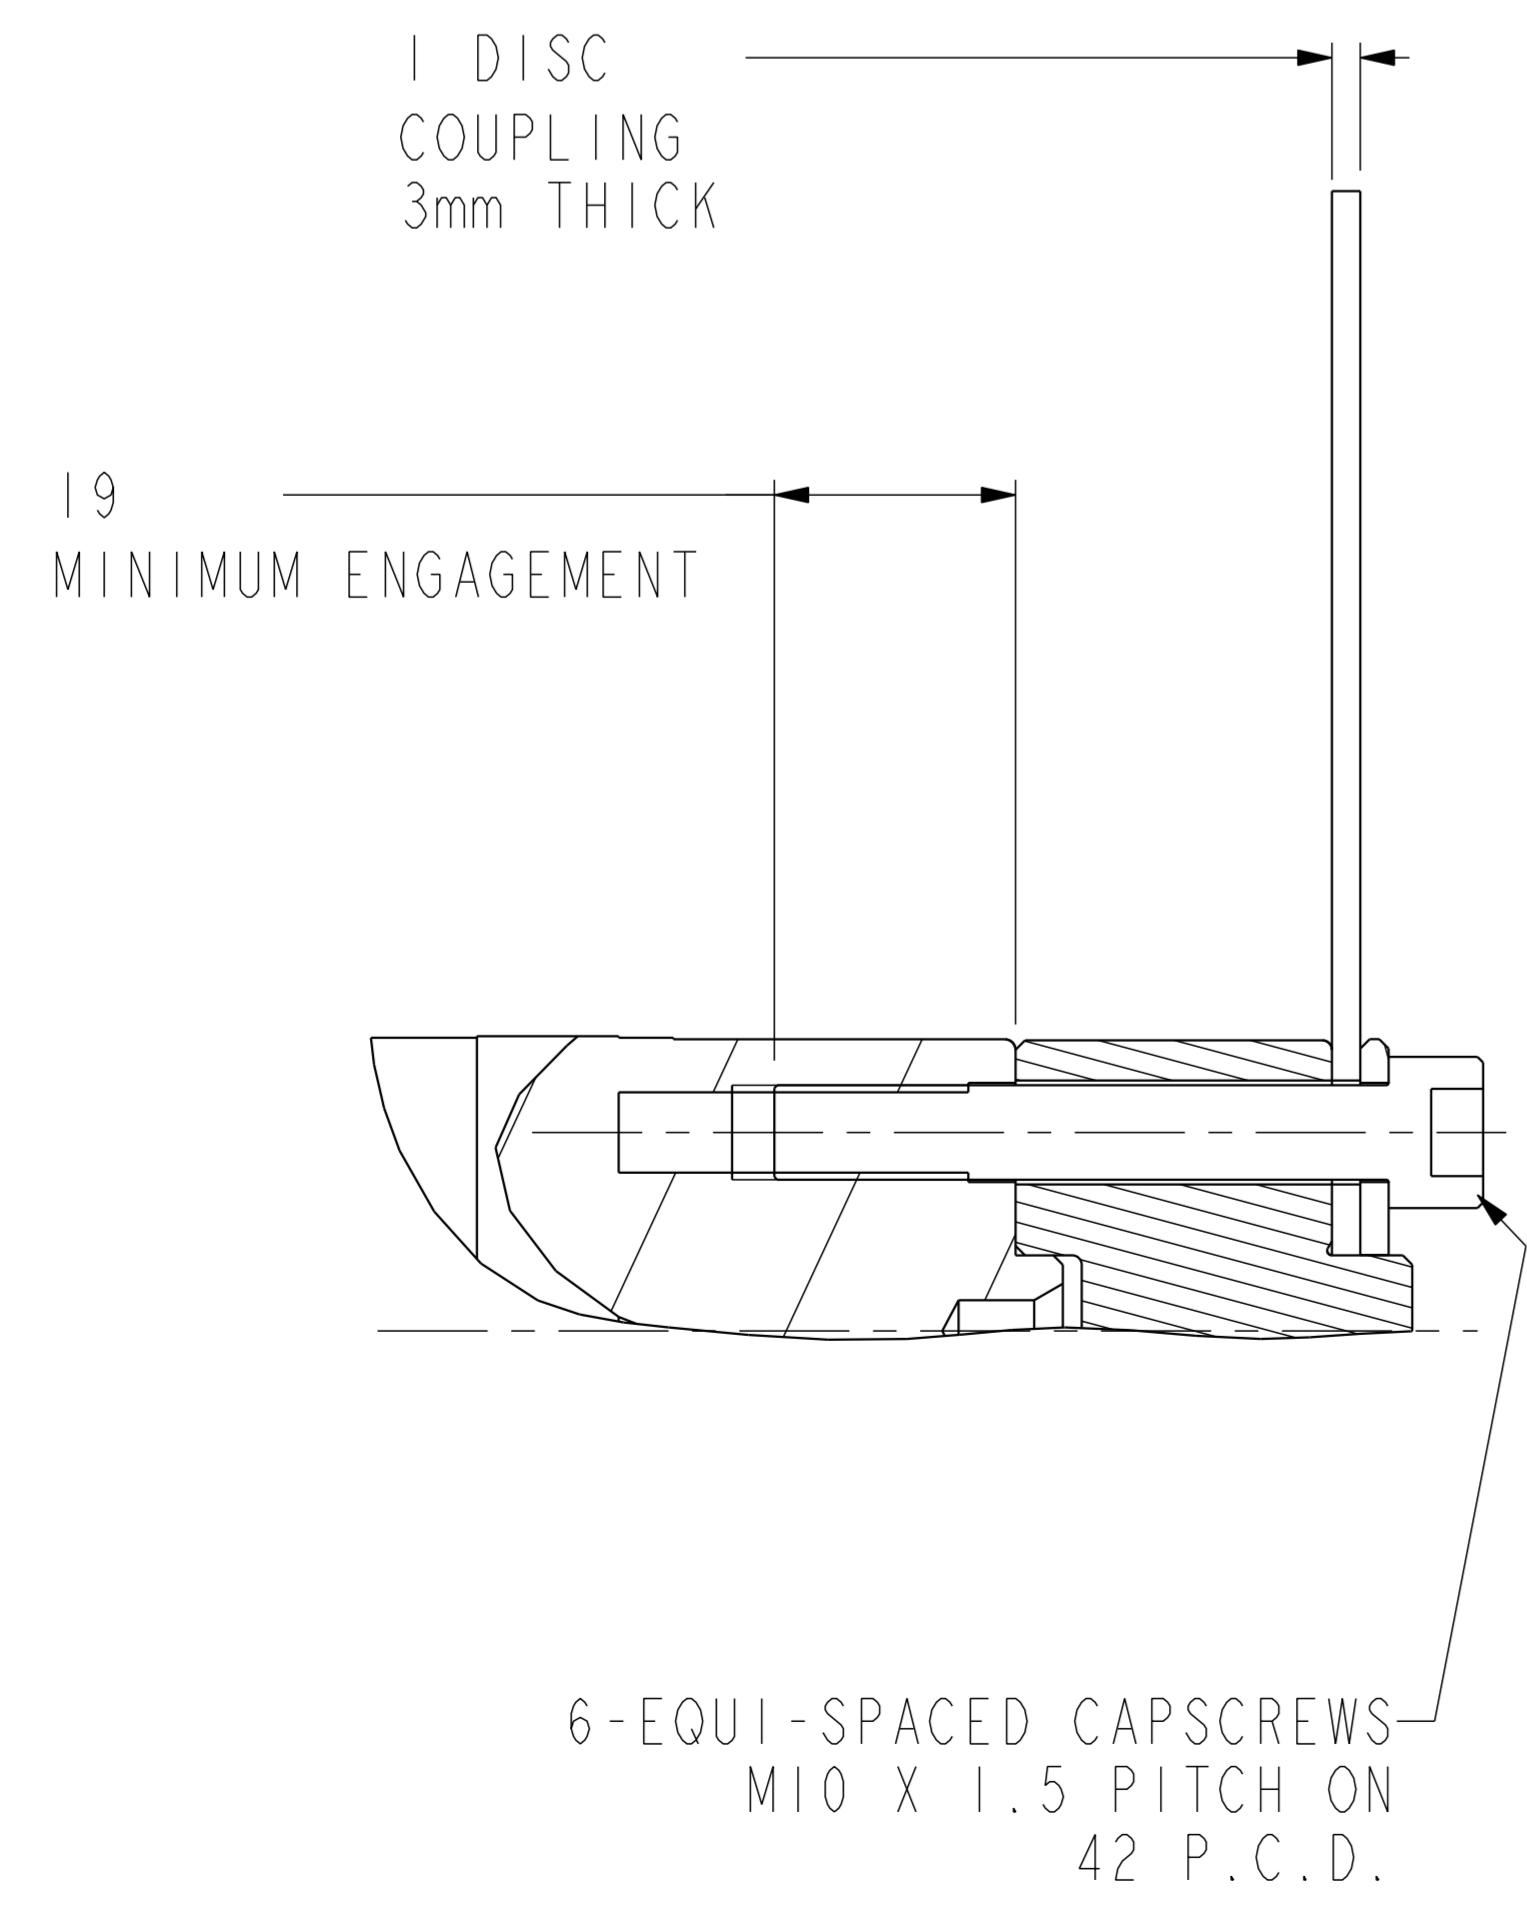

COMPONENT	MASS (kg)	WR ² (kgm ²)
SHAFT	9.784	0.0035
FAN	0.976	0.0067
MAIN ROTOR	37.368	0.1328
EXCITOR ROTOR	5.120	0.0201
TOTAL WITHOUT EBG ROTOR	53.248	0.1631
EBG ROTOR	1.701	0.0017
TOTAL WITH EBG ROTOR	54.949	0.1648

ADAPTOR SAE No.	COUPLING SAE No.	COUPLING DIMENSIONS		MASS OF DISC (kg) (1 X 3mm THICK)	MASS OF SHAFT SPACER (kg)	MASS OF PRESSURE PLATE (kg)	TOTAL MASS OF COUPLING ASSEMBLY (kg)	COUPLING STIFFNESS (kgcm/rad)	COUPLING DISC WR ² (kgm ²)
		ØXX mm	YY mm						
4/5	6 1/2	215.8	10	0.850	0.233	0.069	1.152	13.955 X 10 ⁶	0.0049
4/5	7 1/2	241.2	10	1.069	0.233	0.069	1.371	13.835 X 10 ⁶	0.0079
4/5	8	263.5	41.8	1.275	0.974	0.069	2.318	13.747 X 10 ⁶	0.0111
3/4	10	314.2	33.6	1.819	0.783	0.069	2.671	13.616 X 10 ⁶	0.0225
3	11 1/2	352.3	19.4	2.287	0.452	0.069	2.808	13.555 X 10 ⁶	0.0355

CONVERSION FACTORS		
TO CONVERT	TO	DIVIDE BY
kg	lb	0.453592
kgm ²	lbf ft ²	0.04214
kgcm/rad	lbin/rad	1.1521246
N/m ²	lbf/in ²	6894.76

CONFIDENTIAL PROPERTY OF CUMMINS GENERATOR TECHNOLOGIES LTD.						P12J ONE BEARING MOMENTS OF INERTIA AND SHAFT DETAILS			
MATERIAL PROPS	-	DIMENSIONS IN MILLIMETRES (MM) AT 20°C	PROJECTION			SCALE	MATERIAL		
FINISH SPEC	-	SURFACE FINISH VALUES IN MICRO METRES				3:10			
GEOMETRY SPEC	-		WEIGHT	=		DRG. SIZE	CASTING No.		
ASSEMBLY SPEC	-	UNLIMITED DIMS ±	DRAWN	SMJ	06.07.07	A	PART No. L15-13226		
PERFORMANCE SPEC	-		CHECKED	RPM	11.07.07	P	ISSUE A		
QUALITY SPEC	-		APPROVED	DPC	12.07.07	Prj ENGINEER	SHEET 1 OF 1 SHEETS		

MOD.	ISSUE	DRAWN	DATE	MODIFICATION
4-9111-12	A	SMJ	06.07.07	ORIGINAL ISSUE