



REL NO	REV	DETAILS	DWN	CKD	APVD	DATE
ECO-130107	E	AVR VIEWS & NOTES UPDATED	SVB	APM	SMH	15NOV12




CORE	C OF G
K	645

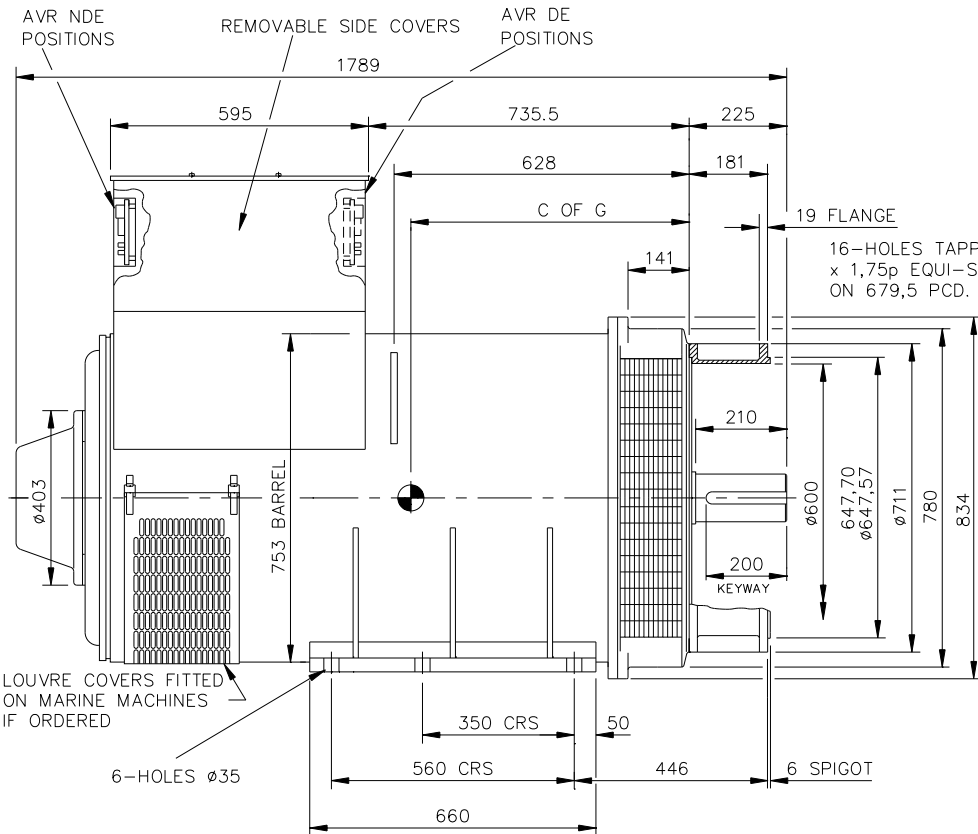

AVR POSITION WHEN FITTED TO NDE OR DE (TO SUIT R/H CABLE ENTRY)

AVR POSITION WHEN FITTED TO NDE OR DE (TO SUIT L/H CABLE ENTRY)

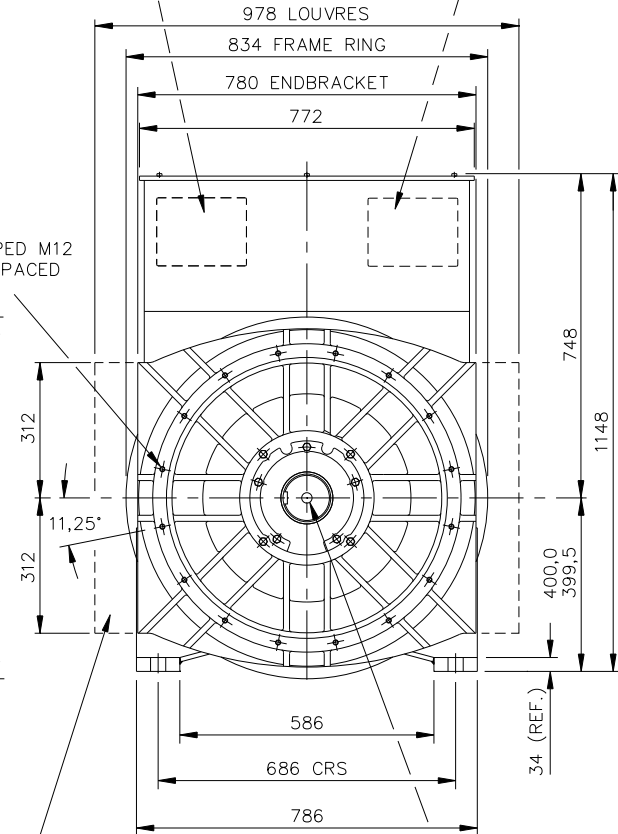

LOUVRE COVERS FITTED ON MARINE MACHINES IF ORDERED

60° DRIP PROOF LOUVRES FITTED AS STANDARD ON MARINE MACHINES OTHERS IF ORDERED

1-HOLE TAPPED M24 x 50 DEEP.

NOTE: - CUSTOMER MAY CUT CABLE ENTRY HOLES AS REQUIRED IN ANY OF THE FOUR TERMINAL BOX SIDES SUBJECT TO POSITION OF AVR, TERMINALS, ETC.

UNLESS SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS			CUMMINS GENERATOR TECHNOLOGIES		
DO NOT SCALE PRINT	DRAWN AJB		DRAWING, GENERAL ASSEMBLY		
	CHECKED AJB		HC/CG6 K 2-BRG SAE0 GA		
CONFIDENTIAL	APPROVED CR	SITE CODE	STA	DWG SIZE	
PROPERTY OF CUMMINS GENERATOR TECHNOLOGIES	DATE 12JUN00	---		A4	66-2005
	SCALE 1:10	FIRST USED ON		SHEET 1	REV E