



Technical Data Sheet for AvK-Alternators

FM 7.3-5

Date:	02/10/13	Customer:	GENERIC DATASHEET only
Project No.:	GENERIC DATASHEET only	AvK Reference:	DSG099K1_8_50_400

Object data:	
Site:	Prime Mover:
Application: Stationary Power Plant	Manufacturer:

Generator data:					
Generator:	DSG 99 K1/8	Poles:	8	Standards: IEC 60034	
Rated power:	1650 kVA	1320 kWe	1388 kWm		
Power factor:	0.80				
Power at pf 1,0	1341 kVA	1341 kWe	1388 kWm		
Rated voltage:	0.4 kV				
Speed:	750 1/min				
Frequency:	50 Hz		Voltage range / frequency range:		
Rated current:	2381.6 A		Zone A according IEC 60034-1 (dU = +/-5%, df = +/-2%)		
Winding pitch:	ca. 5/6				
Insulation class:	Stator: Class H	Rotor: Class H	Temperature rise:	H	
Ambient temperature:	40 °C		Environment:	Standard environment	
Site altitude:	1000 m				
Enclosure:	IP23		Filter:		
Cooling:	IC 01 - Open-circuit ventilation				
Coolant:	Ambient Air	Temperature	40 °C	Temperature Air inlet	40 °C
		Coolant:		generator:	
		Cooling air vol.:	2.5 m³/s	Cooling water quantity:	n/a
Moment of inertia (I):	170 kgm²	Weight:	6600 Kg	Losses (environment):	68 KW
				Losses (cooling):	n/a

Wires:	4 terminals, starpoint connected in terminal box
Operation mode:	Single mode
Regulators:	
Voltage regulator:	DECS 100

Electrical data: (acc. IEC)					
Efficiencies:	110%	100%	75%	50%	25%
Power factor 0.8	94,85	95,1	95,5	95,55	94,2
Power factor 0.9	95,64	95,85	96,1	96,03	94,5
Power factor 1.0	96,43	96,6	96,7	96,5	94,8

Reactances and time constants									
	unsaturated		saturated			unsaturated		saturated	
X_d	2.00	1.80 p.u.	X_q	1.00	0.98 p.u.	$T_{d0'}$	2 s	$T_{d0''}$	0.02878 s
X_d'	0.330	0.330 p.u.	X_q'	1.00	0.98 p.u.	T_d'	0.33 s	$T_{q0'}$	0.3 s
X_d''	0.189	0.172 p.u.	X_q''	0.189	0.189 p.u.	T_d''	0.015 s	$T_{q0''}$	0.15873 s
X_2	0.199	0.181 p.u.	X_0	0.057	0.052 p.u.	T_a	0.045 s	$T_{q1'}$	0.3 s
X_{1s}	n.a.	0.103 p.u.						$T_{q1''}$	0.03 s
Short circuit ratio saturated:	0.56		Z_n	0.097 Ohm					

Short circuit data:			
Initial short circuit current (3-phase):	I_k'	13846 A	
Max. peak current (3-phase):	I_s	35246 A	
Sustained short circuit current:	I_k	7145 A	
		Minimum 3 x rated current for max.10 s	
Initial short circuit torque:	M_{k2}	158.8 kNm	
	M_{k3}	95.3 kNm	
Max. faulty synchron moment:	M_f	341.4 kNm	
Rated kVA torque:	M_{SN}	21.01 kNm	
Rated torque	M_N	16.81 kNm	
Shaft torque	M_{Sh}	17.68 kNm	


Load application:	
max. load application: 750 kVA (corresponds to 45,45 % from 1650 kVA) for Power factor 0.4 15% transient voltage drop	Power: 1650 kVA Power factor: 0.8 transient voltage drop: -24.8 %

Remarks:

Alternator : DSG 99 K1/8

Rated output [kVA]	1650	Rated power factor:	0.8	Rated voltage [kV]: 0.4
Rated frequency [Hz]	50	Rated speed [rpm]	750	


Wirkungsgrad-Kennlinie - Efficiency Curve

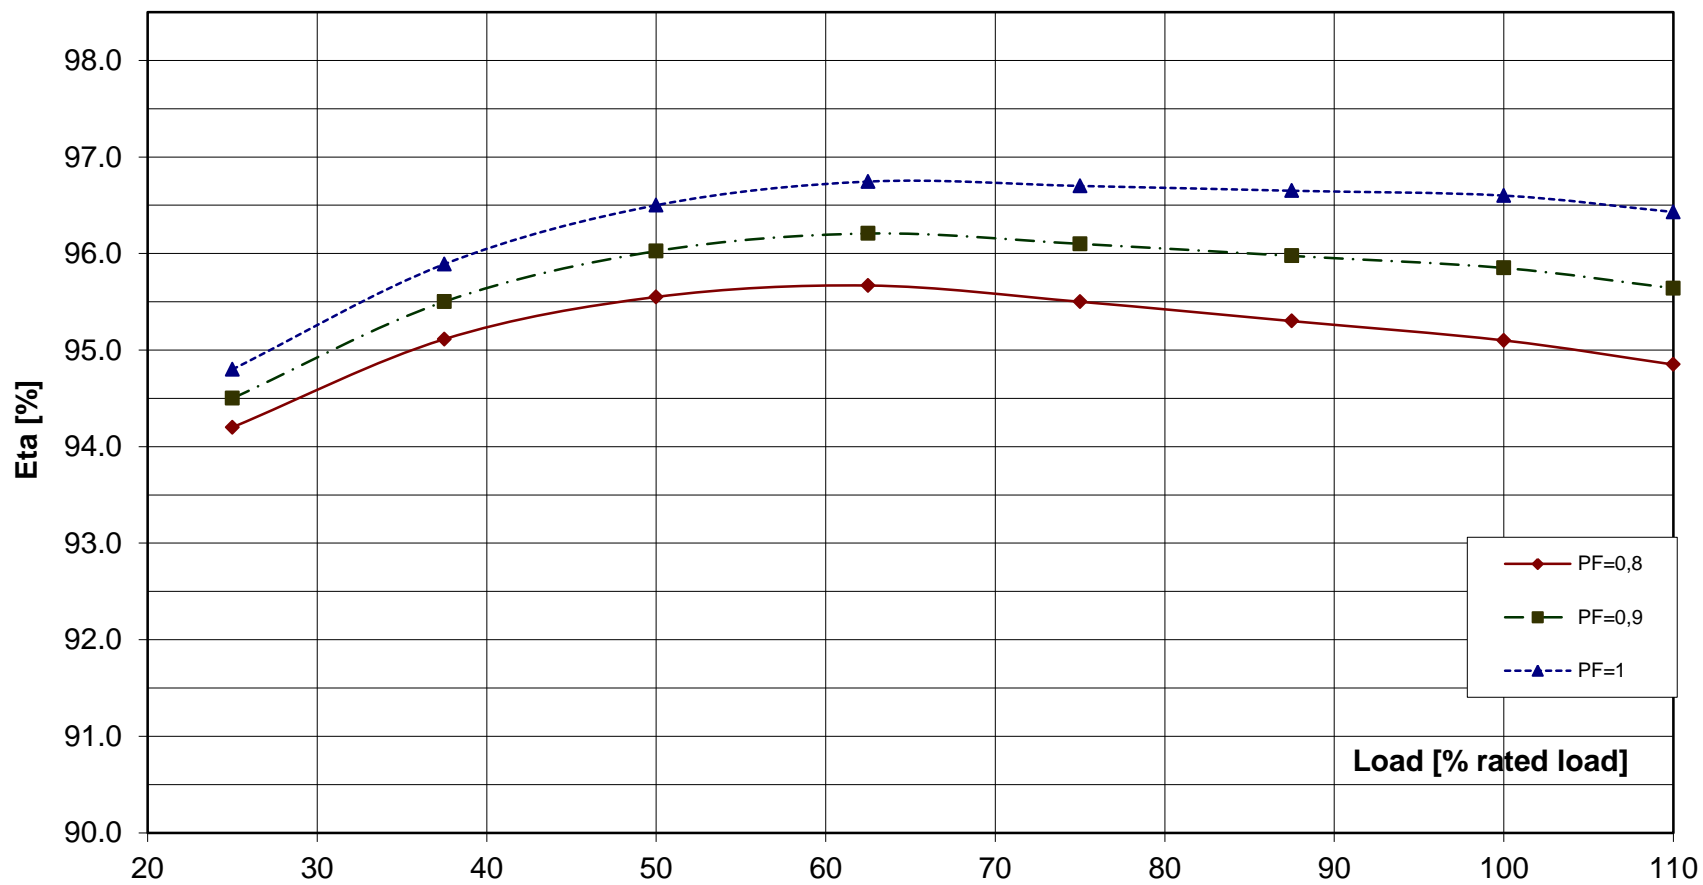

Alternator : DSG 99 K1/8

Rated output [kVA]	1650	Rated power factor:	0.8	Rated voltage [kV]:	0.4
Rated frequency [Hz]	50	Rated speed [rpm]	750		

Transient Voltage rise or drop for sudden load removal or application

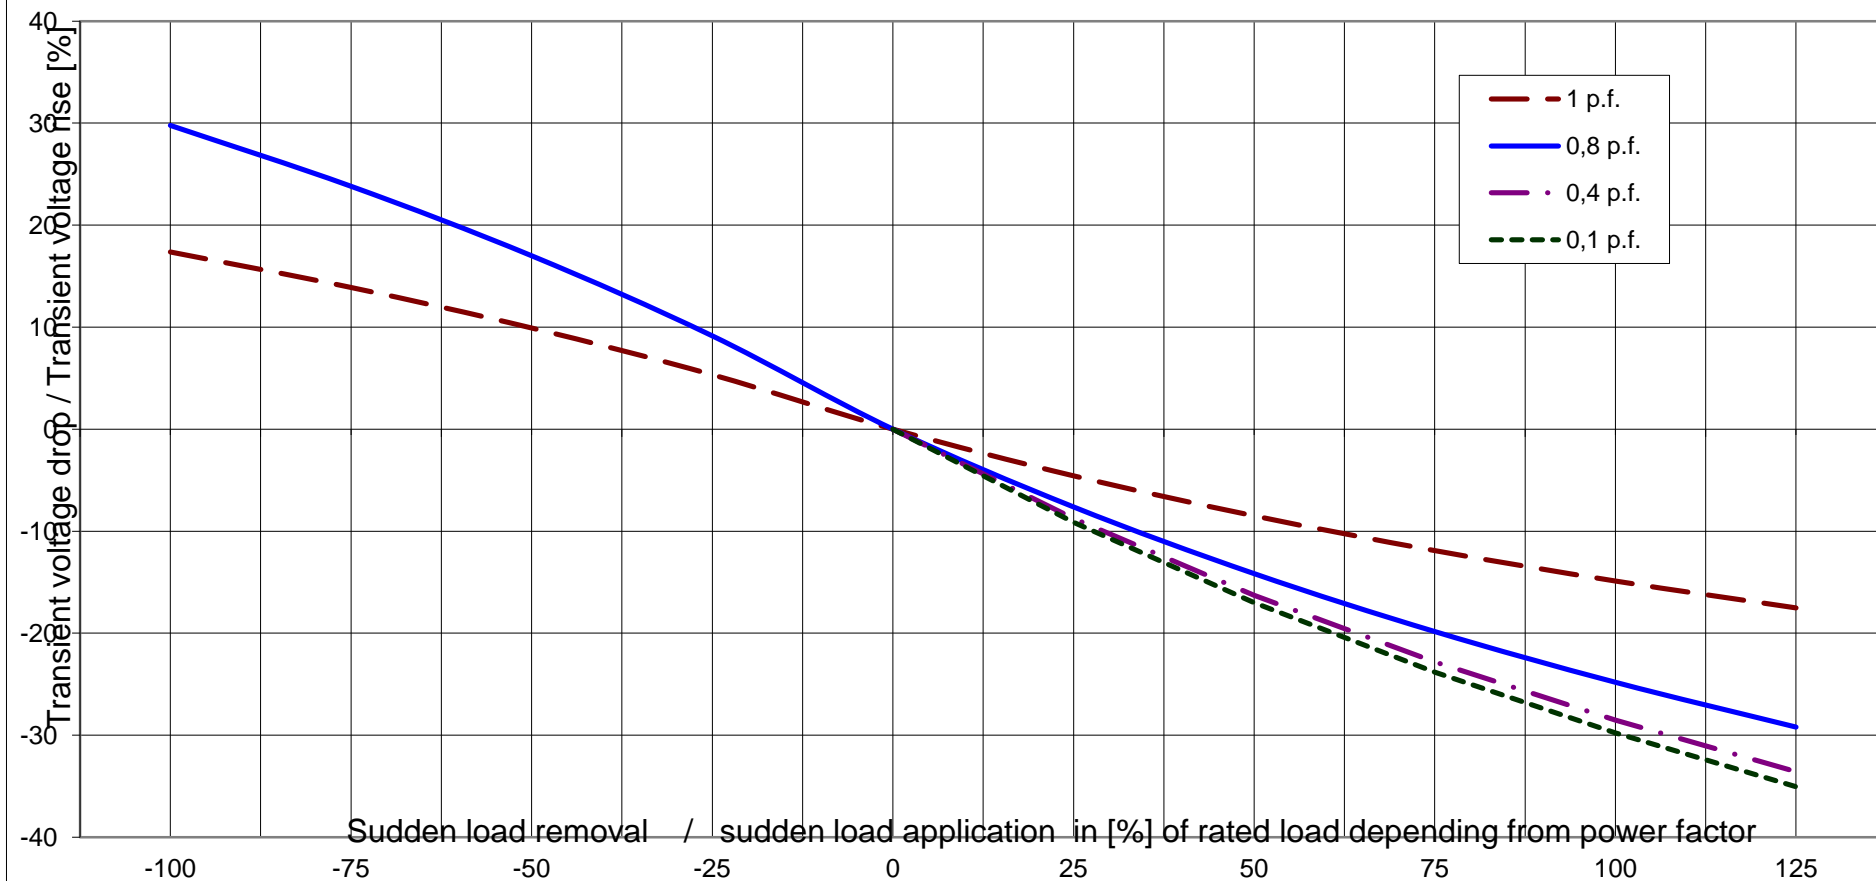




Technisches Datenblatt - Diagramme
Technical data sheet - Diagrams

ING-FCD-0112

Alternator : DSG 99 K1/8

Rated output [kVA]	1650	Rated power factor:	0.8	Rated voltage [kV]:	0.4
Rated frequency [Hz]	50	Rated speed [rpm]	750	MSN related to kVA:	21.01 KNm

Kurzschlußmomenten-Verlauf 2-poliger KS
Short circuit torque at 2-phase SC

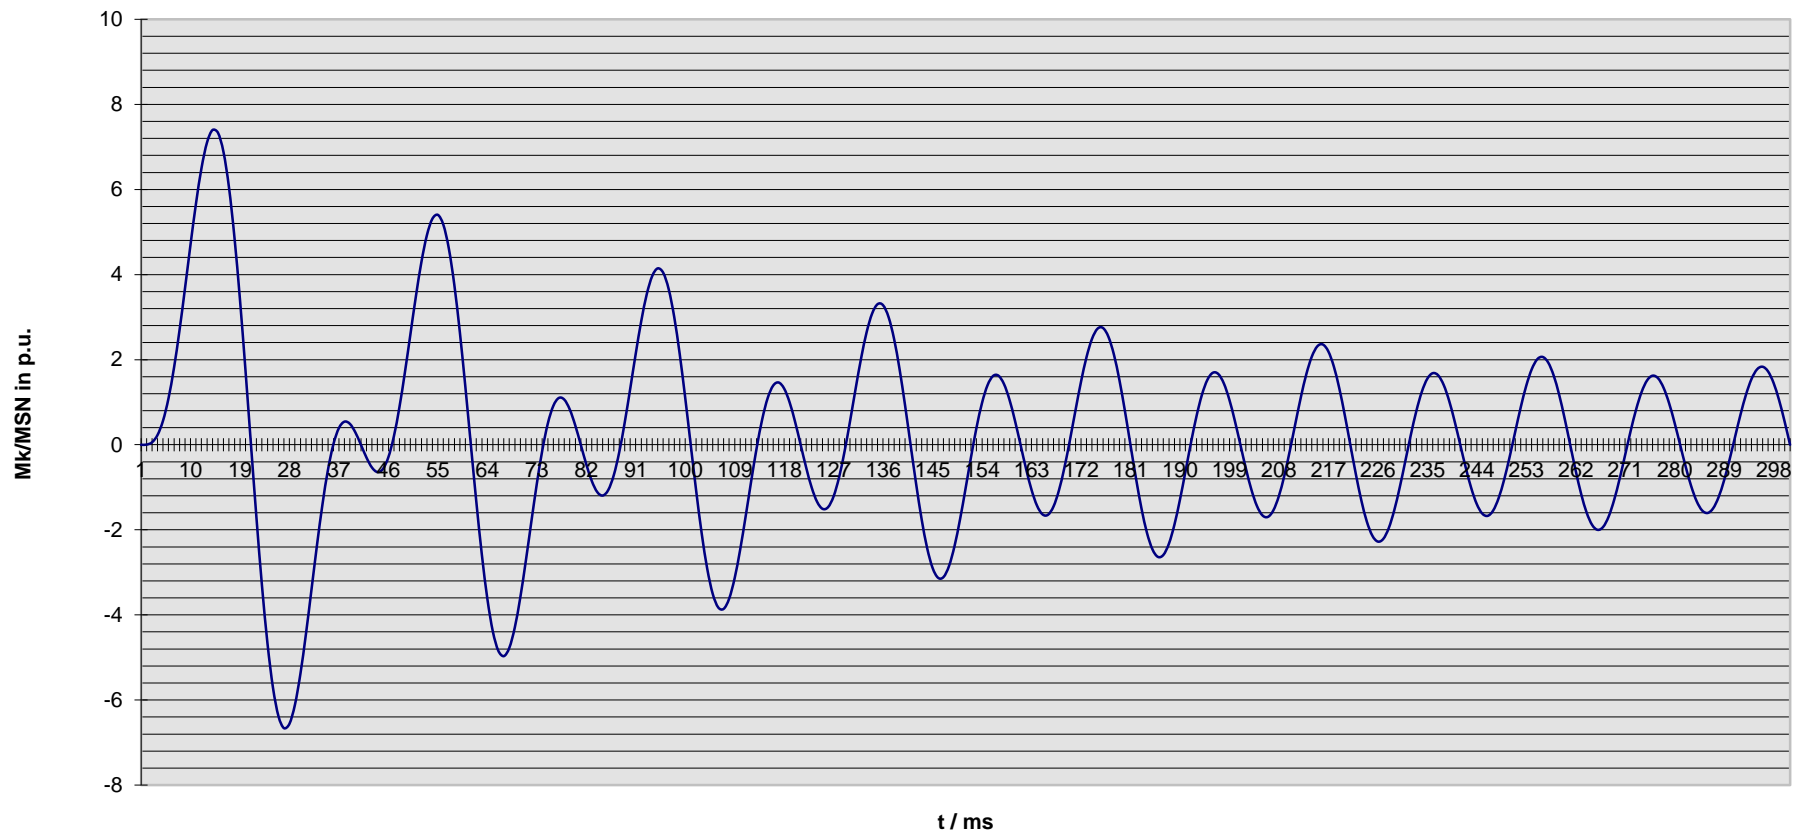

Nennenden / nominal data

DSG 99 K1/8

Leistung S_N : **1650** kVA

$\cos \varphi$: **0.80**

Rating

p.f.

Spannung U_N : **0.40** kV

Strom I_N : **2382** A

Voltage

Current

Frequenz f : **50** Hz

Drehzahl n : **750** min⁻¹

Frequency


Speed

Schutzart **IP23**

Protection

Kurzschlussstrom $I_{k3\text{phasig}} / I_N$ [p.u.]
 Short-circuit current $I_{k3\text{phase}} / I_N$ [p.u.]

Stosskurzschluss-Strom, 3-phasig, asymmetrisch /
Sudden short circuit current, 3-phase, asymmetrical

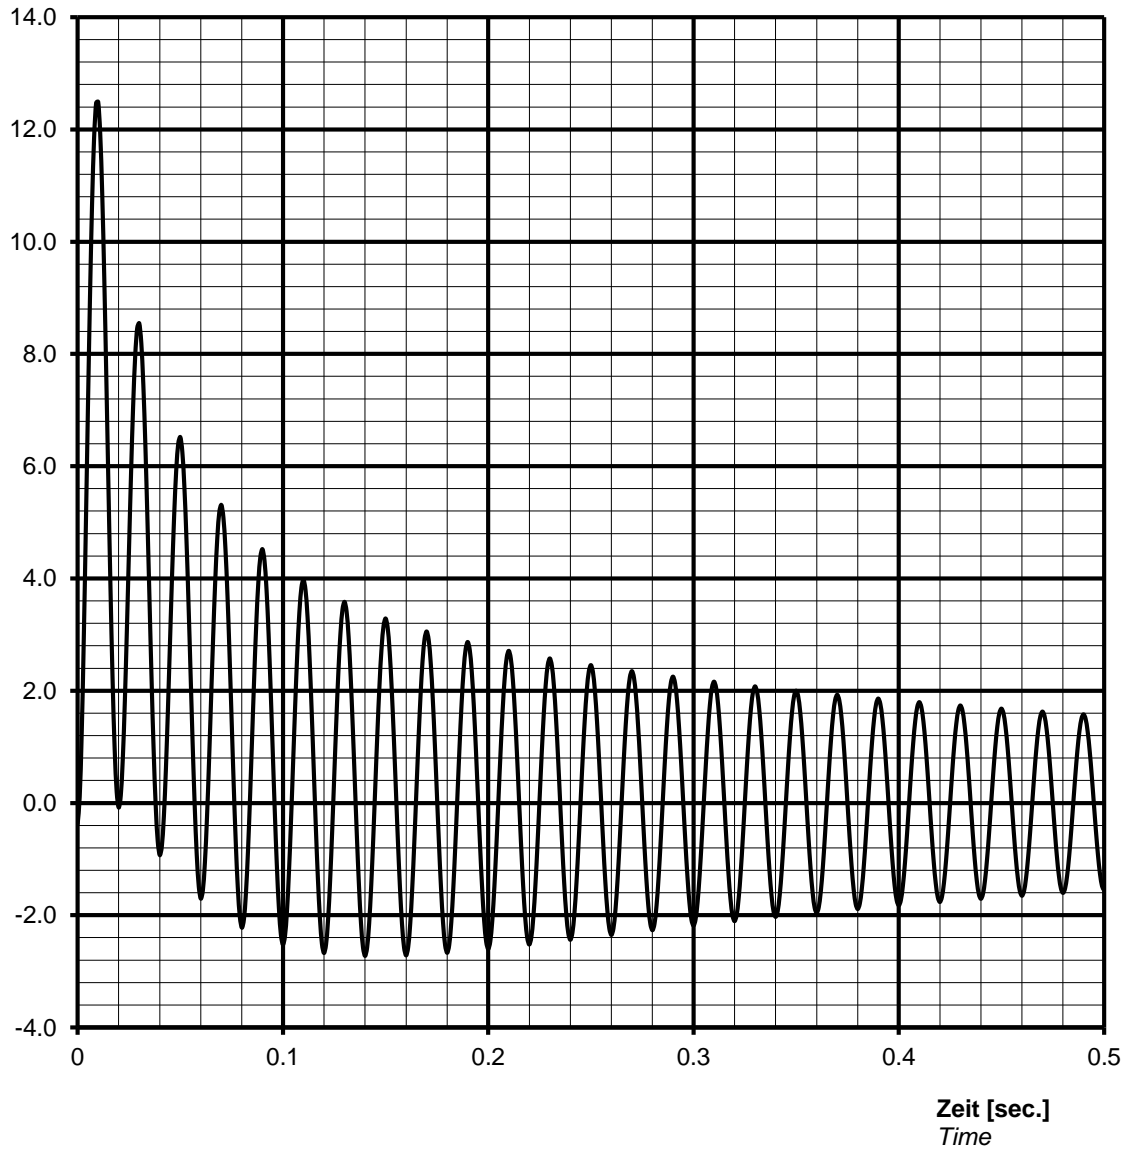

Notizen / remarks:

Maximum asymmetric peak value $I_{\text{speak}} =$ **29746 A** or **12.49 p.u.**


Nenndaten / nominal data

DSG 99 K1/8

Leistung S_N : **1650** kVA
Rating
 Spannung U_N : **0.40** kV
Voltage
 Frequenz f : **50** Hz
Frequency
 Schutzart **IP23**
Protection

$\cos \varphi$: **0.80**
p.f.
 Strom I_N : **2382** A
Current
 Drehzahl n : **750** min⁻¹
Speed

Überlast Kennlinie
Overload capability

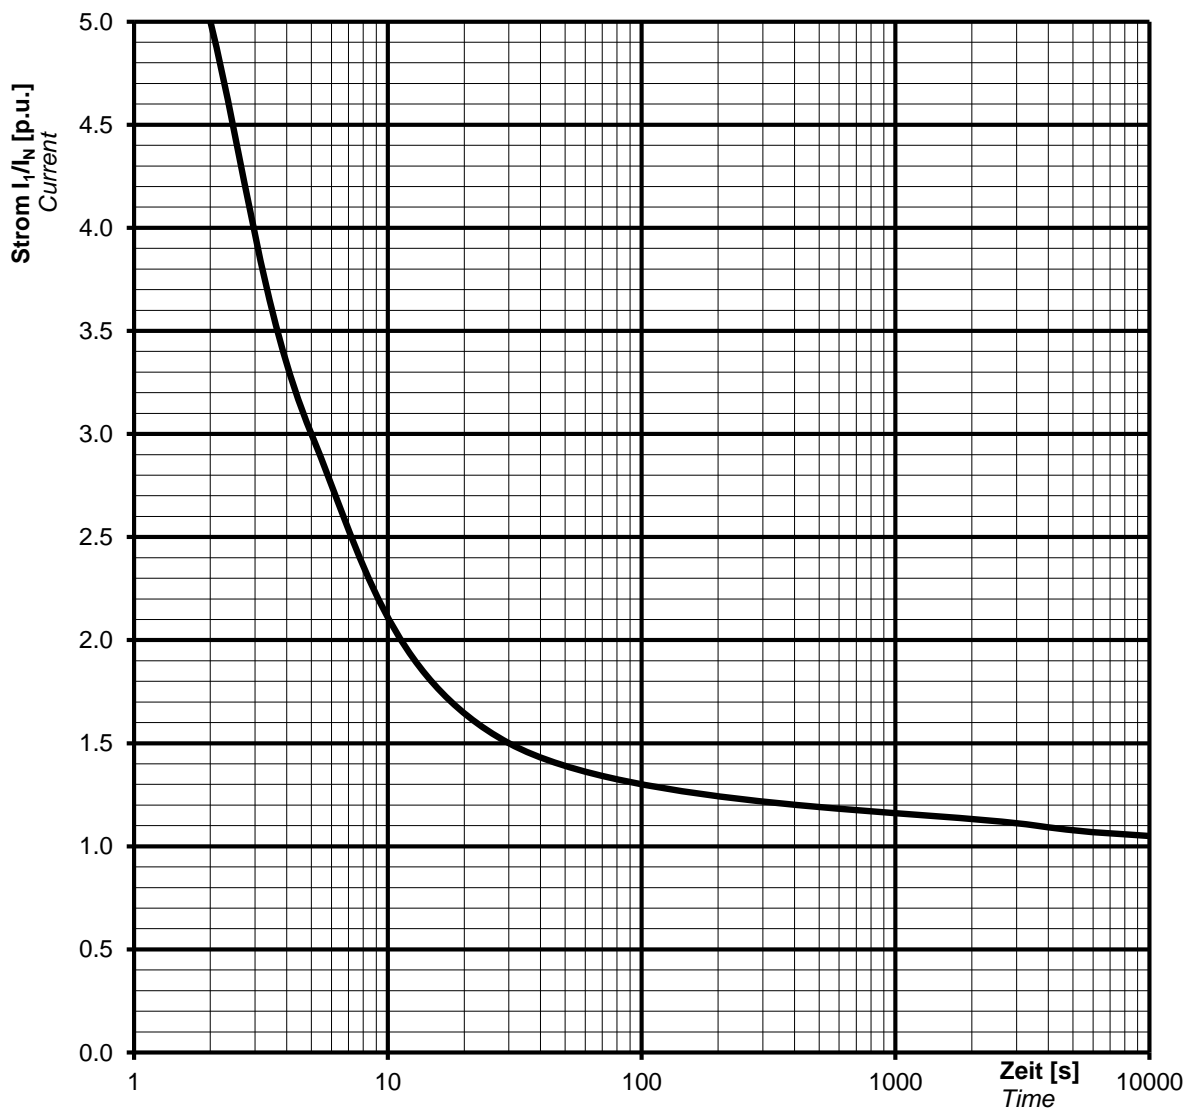

Notizen / remarks:

Strom / Zeit Kriterien: $(I / I_N)^2 \cdot t = 45s$
Current/time characteristics: 1,5 * I_N for 30 s
 1,1 * I_N for 1 h in 6h

Nennndaten / nominal data

DSG 99 K1/8

Rating S_N : **1650 kVA**

Bemessungsleistung

Nominal voltage U_N : **0.40 kV**

Bemessungsspannung

Frequency f_N : **50 Hz**

Frequenz

Protection: **IP23**

Schutzart

p.f. **0.80**

Leistungsfaktor $\cos \varphi$:


Nominal current I_N : **2382 A**

Bemessungsstrom

Speed n: **750 min⁻¹**

Drehzahl

Inverse current or unbalanced negative sequence current

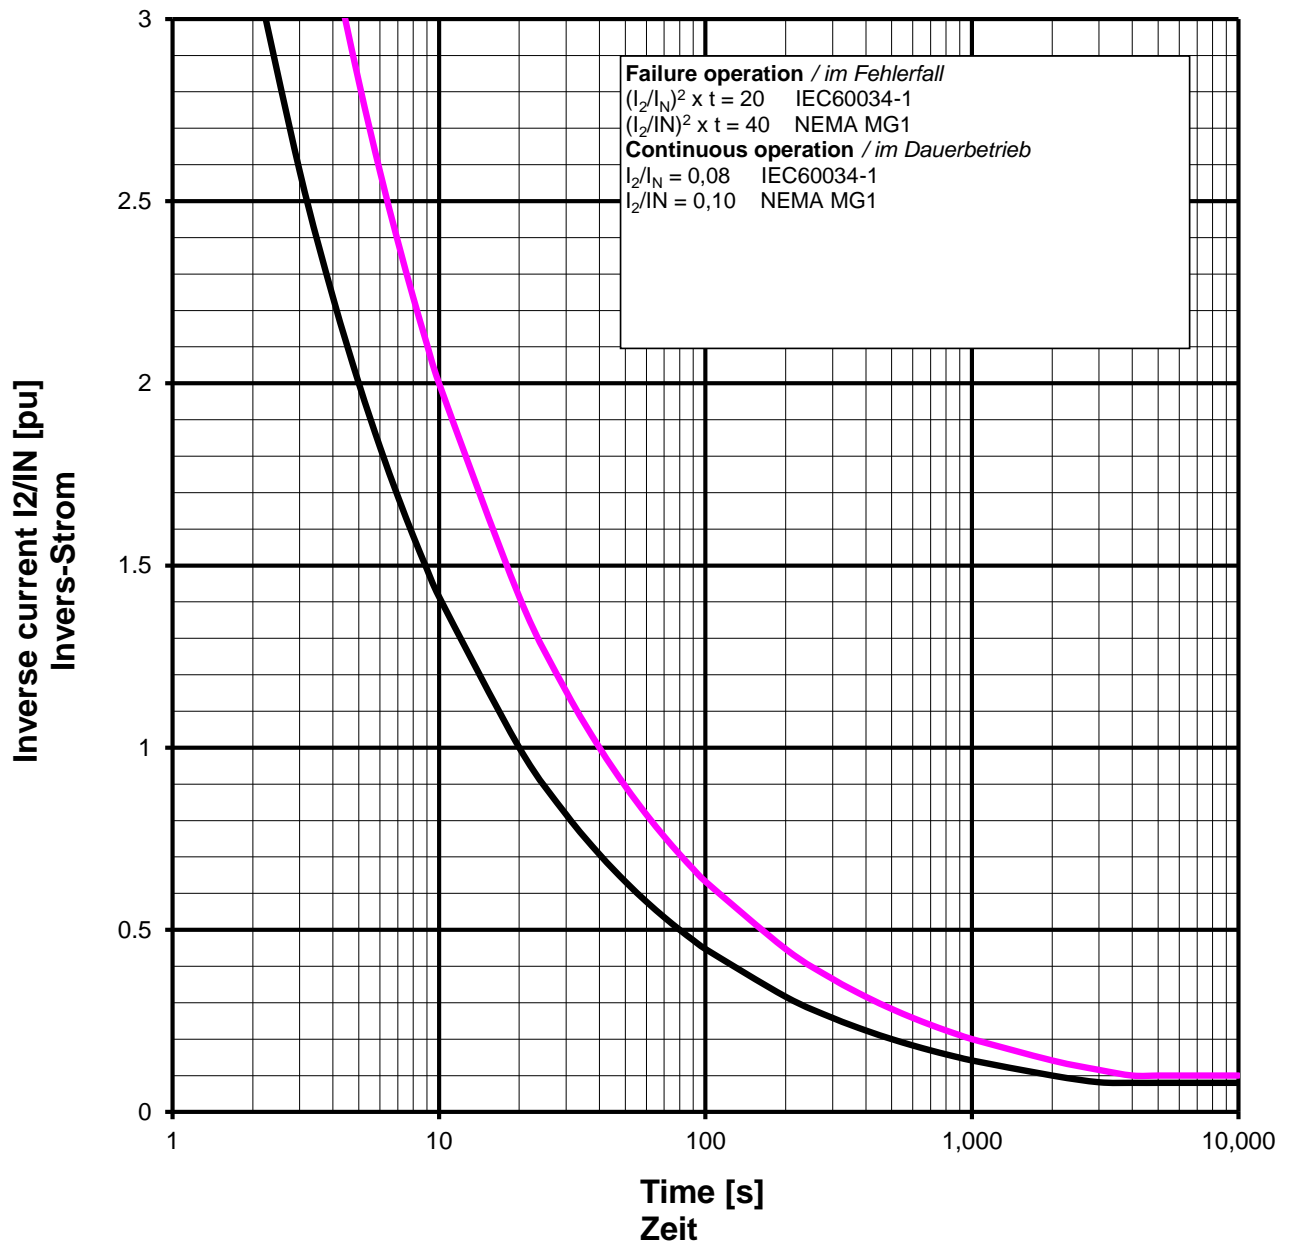

Remarks / Notizen:

All data according IEC 60034-1, NEMA MG1



Technische Daten selbstregelnden Drehstrom-Synchrongenerator
 technical data for self regulating three phase alternator

ING-FCD-0112


TYPE

DSG 99 K1/8

Projekt:

Order Nr.:

Capability (P-Q) Diagram

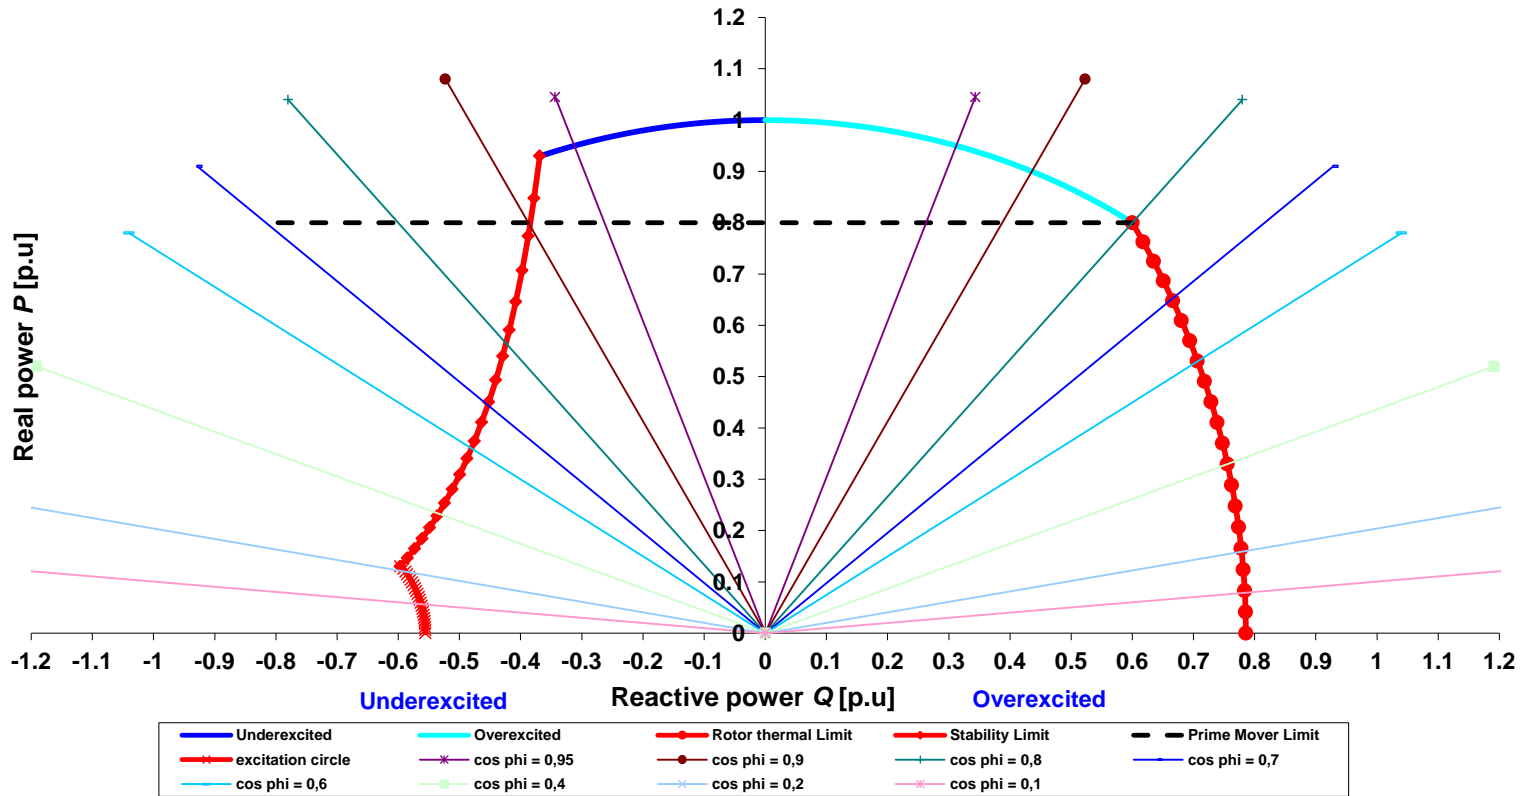

Cummins Generator Technologies

Datum / date:

03/10/2013



Technische Daten selbstregelnden Drehstrom-Synchrongenerator
 technical data for self regulating three phase alternator


ING-FCD-0112

TYPE

DSG 99 K1/8

Projekt:

Order Nr.:

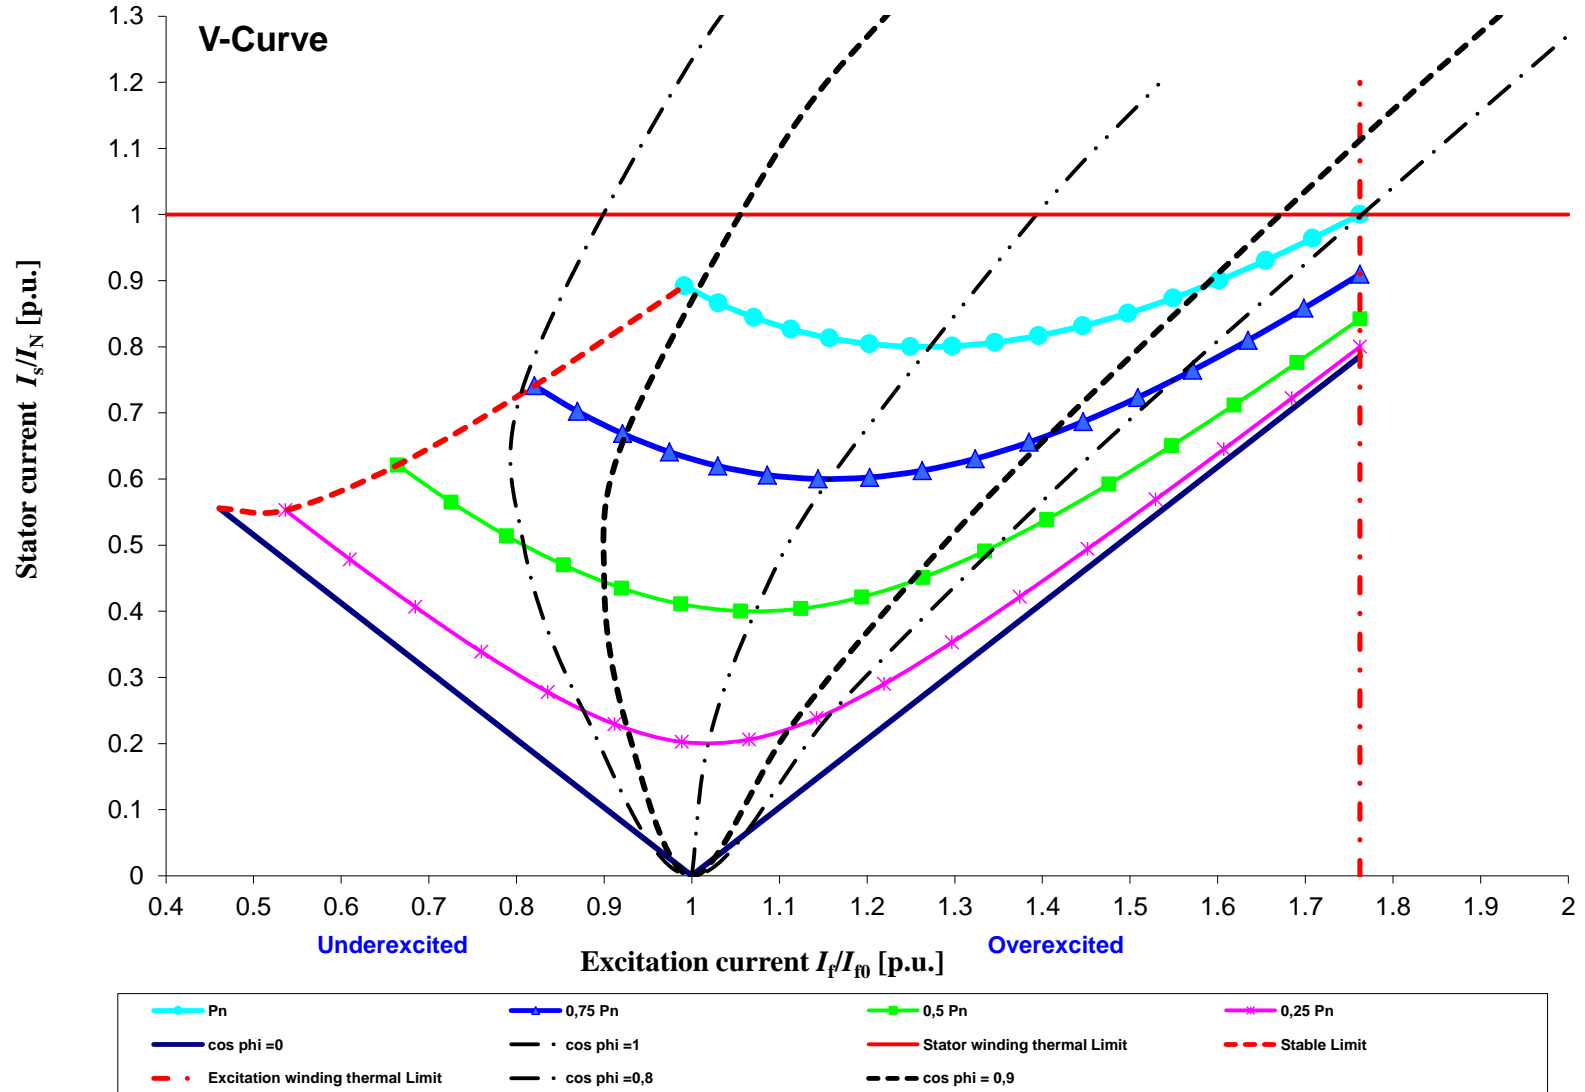

Cummins Generator Technologies

Datum / date:

03/10/2013